INSTITUTE

OF

BEHAVIORAL

SCIENCE



AUGUST 15, 2008











Institute of Behavioral Science

University of Colorado - Boulder


AndersonMasonDale Architects


Schematic Design May 23, 2008

10	EVIATIONS	AND AB	NOT ALL ABBREVIATIONS AND SYMBOLS ABREVIATIONS ON THIS SHEET APPLY ONI	Y TO ARCHITECT	URAL DRAWINGS	BOLS	GRAPH ▲	IIC SYMBOLS		PLINE INDEX
/C CST	AIR CONDITIONING ACOUSTIC	FBO FD	FURNISHED BY OWNER FLOOR DRAIN	PAR PC	PARALLEL PRECAST CONCRETE		1	BUILDING SECTION SYMBOL: UPPER=THE SECTION NUMBER	A ARCH	IITECTURAL DRAWINGS
CR	ACRYLIC	FEC	FIRE EXTINGUISHER CABINET	PERP	R		A101	LOWER=THE SHEET WHERE DRAWN	C CIVIL	OR SURVEY DRAWINGS
т	ACOUSTICAL TILE	FEX	FIRE EXTINGUISHER	PL	PLATE					
	AREA DRAIN	FIN	FINISH(ED)	PLAM	PLASTIC LAMINATE			CABINET TYPE SYMBOL:	E ELEC	TRICAL DRAWINGS
D	ADDENDUM	FLR(G)	FLOOR (ING)	PLBG	PLUMBING			UPPER=CABINET STYLE LOWER=CABINET SIZE		
H	ADHESIVE ADJACENT	FND	FOUNDATION FACE OF STUD	PNT	PAINT(ED)			LOWER=CADINET SIZE	L LAND	SCAPE DRAWINGS
J JST	ADJUSTABLE	FOS FR	FIRE RESISTIVE	DOE	POUNDS PER SQUARE FOOT			DETAIL OR WALL SECTION SYMBOL:	M MECH	HANICAL DRAWINGS
=	ABOVE FINISHED FLOOR	FT	FOOT, FEET	PSF PSI	POUNDS PER SQUARE FOOT POUNDS PER SQUARE INCH	L	1	UPPER=THE SECTION NUMBER	W. W.E.O.	William La Brit William
U	AIR HANDLING UNIT	FTG	FOOTING	PTN	PARTITION		A101	LOWER=THE SHEET WHERE DRAWN	G GENE	RAL INFORMATION
UM	ALUMINUM	FUT	FUTURE	PVC	POLYVINYL CHLORIDE					
	ALTERNATE			PVMT	PAVEMENT				P PLUM	IBING DRAWINGS
IOD PROX	ANODIZED APPROXIMATE (LY)	GA	GAUGE, GAGE	PWD	PLYWOOD		(E-1)	EQUIPMENT TYPE INDICATOR: LETTER= GROUP FUNCTION	S STRU	CTURAL DRAWINGS
CH	ARCHITECT(URAL)	GALV	GALVANIZED	QTY	QUANTITY		E-1	NUMBER= ITEM NUMBER	3 3110	OTOTAL DIAWINGS
PH	ASPHALT	GB	GYPSUM BOARD	Δ	Q0/111111				CONT	ENT INDEX
TO	AUTOMATIC	GBAR	GRAB BAR	R	RESISTANCE, THERMAL, RISER			TOILET ACCESSORY INDICATOR:	CONT	
		GC	GENERAL CONTRACT (OR)	RB	RUBBER BASE		(TA-1)	TA= TOILET ACCESSORY NUMBER= ITEM NUMBER		
	BOARD	GL GR	GLASS, GLAZING GRILLE	RAD	RADIUS			NOMBER - ITEM NOMBER	0 GENE	RAL INFORMATION AND STANDARDS
) WN	BETWEEN	GR	GHILLE	RCP RD	REFLECTED CEILING PLAN ROOF DRAIN		_1		1 PLAN	S INCLUDING SITE, FLOOR, CEILING AND
.DG	BUILDING			RE	REFERENCE, REFER TO			EXTERIOR ELEVATION SYMBOL:		F DRAWINGS
K(G)	BLOCK (ING)	НВ	HOSE BIB	REINF	REINFORCING		(A101)	UPPER=THE ELEVATION NUMBER		
Л	BEAM	HC	HOLLOW CORE	REM	REMOVE			LOWER=THE SHEET WHERE DRAWN	2 EXTE	RIOR ELEVATIONS
)	BY OTHERS	HCAP	HANDICAPPED	REQ	REQUIRE (D)			DNAWIN		
OT .	BOTTOM	HDW	HARDWARE	RM	ROOM		_		3 BUILD	DING SECTIONS
} }	BACKER ROD	HM HOR	HOLLOW METAL HORIZONTAL	RO ROW	ROUGH OPENING			OTPLIOTURAL ORIENTE IN THE INTERIOR	Д ENII A	RGED FLOOR PLANS, SECTIONS AND ELEVATION
G K	BEARING BRICK	HOR HPT	HORIZONTAL HIGH POINT	ROW RR	RIGHT OF WAY RESTROOM		(0)	STRUCTURAL GRIDLINE IDENTIFIER	+ ENLA	HGLD I LOOR FLAINS, SECTIONS AND ELEVATION
	BOTH SIDES	HR	HOUR	1111	HEOTHOOM				5 SCHE	DULES
МТ	BASEMENT	HT	HEIGHT							
R	BUILT UP ROOFING	HTR	HEATER	SBLK	SPLASH BLOCK		Name	— HEIGHT INDICATOR	6 DETA	ILS
		HVAC	HEATING/VENTILATION/AC	SC	SOLID CORE		T Elevation		_	LEMENTAL DRAWING
В	CARINET	HW	HOT WATER HEATER	SCH	SCHEDULE				7 SUPP	LEMENTAL DRAWINGS
B M	CABINET CUBIC FEET/MINUTE	HWH	HOT WATER HEATER	SD	STORM DRAIN				8 61100	LEMENTAL DRAWINGS
ivi i	CORNER GUARD			SEC SHT	SECTION SHEET		1	INTERIOR ELEVATION SYMBOL: THE DARKENED CORNERS INDICATE DRAWN	5 5022	EFMENTAF DI MANINAGO
C	CAST-IN-PLACE CONCRETE	ID	INSIDE DIAMETER	SHTH	SHEATHING		4	WALLS. ELEVATION DRAWINGS ARE		
Γ	CONTROL JOINT	IN	INCH(ES)	SIM	SIMILAR		2 A410	ARRANGED NUMERICALLY BY ROOM NUMBER ON THE INTERIOR ELEVATION	CHEE.	T NUMBERING
	CENTERLINE	INCAN	INCANDESCENT	SOG	SLAB ON GRADE		3	SHEETS.	SUEE	INUMBERING
G	CEILING	INCL	INCLUDE (D), (ING)	SPEC	SPECIFICATION (S)					
0	CLOSET	INFO INS	INFORMATION INSULATE (D), (ION)	SPL	SPECIAL SQUARE					DISCIPLINE ABBREVIATION
₹ U	CLEAR (ANCE) CONCRETE MASONRY UNIT	INT	INTERIOR	SQ SST	STAINLESS STEEL			MATCHLINE FLAG		DRAWING CONTENT CATEGORY SHEET NUMBER
3	CENTER	INV	INVERT	STC	SOUND TRANSMISSION CLASS					SHEET NOWIDEN
•	CLEANOUT			STD	STANDARD			PLAN AND TRUE NORTH INDICATOR:	<i>∀</i> 7	₩ ₩
)L	COLUMN	JT	JOINT	STL	STEEL		, worth	↑ THE HEAVY LINE REPRESENTS PLAN	Λ.	404
MP	COMPRESS(ED, ION, IBLE, OR)			STO	STORAGE		TRUE	NORTH (USUALLY TOWARD THE TOP OF THE SHEET) THE SMALL ARROW	A -2	4() 7
ONST	CONSTRUCTION	LAB	LABORATORY	STRUC	STRUCTURAL			INDICATES TRUE NORTH (IF	, ,	. • .
ONC	CONCRETE CONTINUOUS OR CONTINUE	LAM LAV	LAMINATE (D) LAVATORY	SUS SYM	SUSPENDED SYMMETRICAL			DIFFERENT FROM PLAN NORTH).		
ONT ONTR	CONTRACT (OR)	LB	POUND(S)	OTW	OTWINE THO AL				IVIATE	RIAL PATTERNS
OORD	COORDINATE	LIB	LIBRARY							
ORR	CORRIDOR	LIN	LINEAL	Т	TREAD					BATT INSULATION
ORRUG	CORRUGATED	LKR	LOCKER	T&B	TOP AND BOTTOM			WALL I'II L'INDICATON, NEI EN		
ΥT -	CARPET (ED) CERAMIC TILE	LT	LIGHT	T&G TEL	TONGUE AND GROOVE TELEPHONE		W00	 TO THE WALL TYPES SHEET FOR WALL TYPE ASSEMBLY. 		
- SNK	COUNTERSINK/COUNTERSUNK	MAINT	MAINTAIN (ENANCE)	TEMP	TEMPERATURE					BRICK
V	COLD WATER	MAS	MASONRY	THK	THICK (NESS)		ı			
		MAX	MAXIMUM	THR	THRESHOLD		/10.1	WINDOW OR LOUVER TYPE INDICATOR:	A A A A	CAST-IN-PLACE CONCRETE
		MC	MECHANICAL CONTRACTOR	THRU	THROUGH		AC-1	WINDOWS HAVE A NUMBER DESIGNATION LOUVERS HAVE A LETTER DESIGNATION	, <u>, , , , , , , , , , , , , , , , , , </u>	CAST-IN-FLACE CONCRETE
L	DOUBLE	MECH	MECHANIC (AL)	TO	TOP OF					
MO	DEMOLISH, DEMOLITION	MET	METAL	TOB TOC	TOP OF BEAM TOP OF CURB					CONCRETE BLOCK
	DRINKING FOUNTAIN	MFR	MANUFACTURE (ER)	TOI	TOP OF CORB		(1)	WORK NOTE INDICATOR		
M	DIAMETER DIMENSION	MH MIN	MANHOLE MINIMUM	TOP	TOP OF INSULATION TOP OF PARAPET					EADTH OD BACKETT
1 :P	DIMENSION DISPOSAL	MIR	MIRROR	TOM	TOP OF MASONRY					EARTH OR BACKFILL
) i	DOWN	MISC	MISCELLANEOUS	TOS	TOP OF SLAB		AP	CEILING MOUNTED ACCESS PANEL		
	DEEP	MO	MASONRY OPENING	TOSTL	TOP OF STEEL					STEEL
F	DAMPPROOFING	MR	MOISTURE RESISTANT	TOW	TOP OF WALL	SIM	9'-0"	CEILING HEIGHT ABOVE FLOOR		
	DOOR	MT MTI	MOUNT (ED), (ING)	TPD TPART	TOILET PAPER DISPENSER TOILET PARTITION	(1) (A101)				
I	DOWNSPOUT DETAIL	MTL	MATERIAL (S)	TR	TRANSOM	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	·			PLASTER, GYPSUM BOARD, PARTICLE BOARD
L /G	DETAIL DRAWING			TS	TUBE STEEL		;			
. 		NA	NOT APPLICABLE	TV	TELEVISION		, l '	DETAIL IDENTIFICATION: DASHED LINE INDICATES EXTENT OF		PLYWOOD
		NIC	NOT IN CONTRACT	TYP T7	TYPICAL TERRAZZO		'	ENLARGED PLAN OR DETAIL		
	EACH	NO	NUMBER	TZ	IENNAZZU		į j		/· ^Δ / / _Δ / / [*]]	
_	EXPANSION JOINT	NOM	NOMINAL							PRECAST CONCRETE
ΕV	ELEVATION	NR NRC	NONE REQUIRED NOISE REDUCTION	UL	UNDERWRITERS LABORATORY					
-0	ELECTRIC (AL) ENCLOSE (URE)	NTS	NOT TO SCALE	UNFIN	UNFINISHED					RIGID INSULATION
	ENCLOSE (URE) ENTRANCE	-	. 	UON	UNLESS OTHERWISE NOTED		ROOM NAME	ROOM IDENTIFICATION:		NIGID INSULATION
	EQUAL			UR	URINAL					
EC C T		OA	OVERALL							0.4.50: 6
-	EQUIPMENT	ОВ	OBSCURE	VAR	VARIABLE (VARIES)				TEXT S	SYMBOLS
C	ELECTRIC WATER COOLER		ON CENTER (S)	VB	VAPOR BARRIER		11	DOOR IDENTIFICATION:	·	-
	ELECTRIC WATER COOLER EXHAUST	ОС	` '				2308A /	DOOR NUMBER=NUMBER OF ROOM ACCESSED	&	
e ST	ELECTRIC WATER COOLER EXHAUST EXISTING	OC OD	OUTSIDE DIAMETER	VCT	VINYL COMPOSITION TILE		2 3 10 A	AND TIPLE BOODS ARE SUITED AND ALBUM RETICAL SUITEDY	Œ	AND
C ST	ELECTRIC WATER COOLER EXHAUST EXISTING EXPOSED	ОС	` '	VCT VERT	VERTICAL		2300A	MULTIPLE DOORS ARE GIVEN AN ALPHABETICAL SUFFIX		AND
: C ST N	ELECTRIC WATER COOLER EXHAUST EXISTING EXPOSED EXPANSION	OC OD OH	OUTSIDE DIAMETER OVERHEAD	VCT VERT VEST	VERTICAL VESTIBULE		2300A	ENDING WITH LETTER 'A' FOR THE SECOND DOOR, 'B' FOR THE THIRD DOOR, ETC. (THE FIRST DOOR IN A	@	AT
; ; ; ;	ELECTRIC WATER COOLER EXHAUST EXISTING EXPOSED	OC OD OH OPG	OUTSIDE DIAMETER OVERHEAD OPENING	VCT VERT	VERTICAL		2500A	ENDING WITH LETTER 'A' FOR THE SECOND DOOR, 'B'	@	
ST N	ELECTRIC WATER COOLER EXHAUST EXISTING EXPOSED EXPANSION	OC OD OH OPG OPH OPP ORD	OUTSIDE DIAMETER OVERHEAD OPENING OPPOSITE HANI COEFFICIENT OPPOSITE OVERFLOW ROOF DRAIN	VCT VERT VEST	VERTICAL VESTIBULE		2500A	ENDING WITH LETTER 'A' FOR THE SECOND DOOR, 'B' FOR THE THIRD DOOR, ETC. (THE FIRST DOOR IN A	@ X	
ST N	ELECTRIC WATER COOLER EXHAUST EXISTING EXPOSED EXPANSION	OC OD OH OPG OPH OPP	OUTSIDE DIAMETER OVERHEAD OPENING OPPOSITE HANI COEFFICIENT OPPOSITE	VCT VERT VEST VIF	VERTICAL VESTIBULE VERIFY IN FIELD			ENDING WITH LETTER 'A' FOR THE SECOND DOOR, 'B' FOR THE THIRD DOOR, ETC. (THE FIRST DOOR IN A		AT BY
;	ELECTRIC WATER COOLER EXHAUST EXISTING EXPOSED EXPANSION	OC OD OH OPG OPH OPP ORD	OUTSIDE DIAMETER OVERHEAD OPENING OPPOSITE HANI COEFFICIENT OPPOSITE OVERFLOW ROOF DRAIN	VCT VERT VEST VIF	VERTICAL VESTIBULE	A	2500A	ENDING WITH LETTER 'A' FOR THE SECOND DOOR, 'B' FOR THE THIRD DOOR, ETC. (THE FIRST DOOR IN A		АТ
Т	ELECTRIC WATER COOLER EXHAUST EXISTING EXPOSED EXPANSION	OC OD OH OPG OPH OPP ORD	OUTSIDE DIAMETER OVERHEAD OPENING OPPOSITE HANI COEFFICIENT OPPOSITE OVERFLOW ROOF DRAIN	VCT VERT VEST VIF	VERTICAL VESTIBULE VERIFY IN FIELD WIDE OR WIDTH			ENDING WITH LETTER 'A' FOR THE SECOND DOOR, 'B' FOR THE THIRD DOOR, ETC. (THE FIRST DOOR IN A ROOM NEVER HAS A LETTER SUFFIX.) REVISION MARKER: TRIANGLE CONTAINS REVISION	X #	AT BY POUND OR NUMBER
Т	ELECTRIC WATER COOLER EXHAUST EXISTING EXPOSED EXPANSION	OC OD OH OPG OPH OPP ORD	OUTSIDE DIAMETER OVERHEAD OPENING OPPOSITE HANI COEFFICIENT OPPOSITE OVERFLOW ROOF DRAIN	VCT VERT VEST VIF W W/	VERTICAL VESTIBULE VERIFY IN FIELD WIDE OR WIDTH WITH WITHOUT WATER CLOSET			ENDING WITH LETTER 'A' FOR THE SECOND DOOR, 'B' FOR THE THIRD DOOR, ETC. (THE FIRST DOOR IN A ROOM NEVER HAS A LETTER SUFFIX.) REVISION MARKER: TRIANGLE CONTAINS REVISION DOCUMENT NUMBER	X # / OR:	AT BY
г	ELECTRIC WATER COOLER EXHAUST EXISTING EXPOSED EXPANSION	OC OD OH OPG OPH OPP ORD	OUTSIDE DIAMETER OVERHEAD OPENING OPPOSITE HANI COEFFICIENT OPPOSITE OVERFLOW ROOF DRAIN	VCT VERT VEST VIF W W/ W/O WC WD	VERTICAL VESTIBULE VERIFY IN FIELD WIDE OR WIDTH WITH WITHOUT WATER CLOSET WOOD			ENDING WITH LETTER 'A' FOR THE SECOND DOOR, 'B' FOR THE THIRD DOOR, ETC. (THE FIRST DOOR IN A ROOM NEVER HAS A LETTER SUFFIX.) REVISION MARKER: TRIANGLE CONTAINS REVISION	X # / OR:	AT BY POUND OR NUMBER PER
Т	ELECTRIC WATER COOLER EXHAUST EXISTING EXPOSED EXPANSION	OC OD OH OPG OPH OPP ORD	OUTSIDE DIAMETER OVERHEAD OPENING OPPOSITE HANI COEFFICIENT OPPOSITE OVERFLOW ROOF DRAIN	VCT VERT VEST VIF W W/ W/O WC	VERTICAL VESTIBULE VERIFY IN FIELD WIDE OR WIDTH WITH WITHOUT WATER CLOSET	<u> </u>		ENDING WITH LETTER 'A' FOR THE SECOND DOOR, 'B' FOR THE THIRD DOOR, ETC. (THE FIRST DOOR IN A ROOM NEVER HAS A LETTER SUFFIX.) REVISION MARKER: TRIANGLE CONTAINS REVISION DOCUMENT NUMBER REVISION DOCUMENT IS NUMBERED IN TITLEBLOCK AT RIG	X # / OR:	BY POUND OR NUMBER

DRAWING INDEX

0.000	OOVER OUTET
G-000	COVER SHEET
G-100	INDEX & ABBREVIATIONS
G-101	CODE REVIEW
G-102	CODE STUDY
C-101	EXISTING CONDITIONS
C-102	DEMOLITION PLAN
C-103	UTILITY AND SITE PLAN
C-104	BORING PLAN
L-100	LANDSCAPE PLAN
S-101	TYPICAL STRUCTURAL BAY STUDIES
A-100	BASEMENT LEVEL FLOOR PLAN
A-101	FIRST LEVEL FLOOR PLAN
A-102	SECOND LEVEL FLOOR PLAN
A-103	THIRD LEVEL FLOOR PLAN
A-104	FOURTH LEVEL FLOOR PLAN
A-105	ROOF LEVEL PLAN
A-201	EXTERIOR ELEVATIONS
A-202	EXTERIOR ELEVATIONS
A-301	BUILDING SECTIONS
A-401	ENLARGED INTERIOR ELEVATIONS
A-402	ENLARGED INTERIOR ELEVATIONS
M-001	MECHANICAL LEGENDS
M-002	MECHANICAL SCHEDULES
M-100	BASEMENT LEVEL HVAC PLAN
M-101	FIRST LEVEL HVAC PLAN
M-102	SECOND LEVEL HVAC PLAN
M-103 M-104	THIRD LEVEL HVAC PLAN FOURTH LEVEL HVAC PLAN
M-401	ENLARGED MECHANICAL ROOM PLAN
M-501	MECHANICAL DETAILS
P-001	PLUMBING LEGENDS AND SCHEDULES
P-100A	FOUNDATION LEVEL PLUMBING PLAN
P-100 P-101	BASEMENT LEVEL FOUNDATION PLAN FIRST LEVEL PLUMBING PLAN
P-101	SECOND LEVEL PLUMBING PLAN
P-103	THIRD LEVEL PLUMBING PLAN
P-104	FOURTH LEVEL PLUMBING PLAN
P-501	PLUMBING DETAILS
FP-001	FIRE PROTECTION LEGENDS AND DETAILS
FP-100	BASEMENT LEVEL FIRE PROTECTION PLAN
FP-101	FIRST LEVEL FIRE PROTECTION PLAN
FP-102	SECOND LEVEL FIRE PROTECTION PLAN
FP-103	THIRD LEVEL FIRE PROTECTION PLAN
FP-104	FOURTH LEVEL FIRE PROTECTION PLAN
E7.00	ELECTRICAL ONE-LINE DIAGRAM
E7.01	ELECTRICAL ONE-LINE DIAGRAM

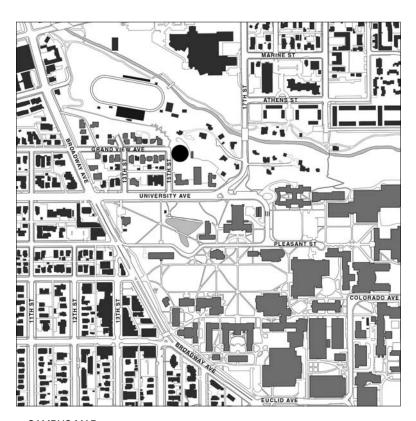

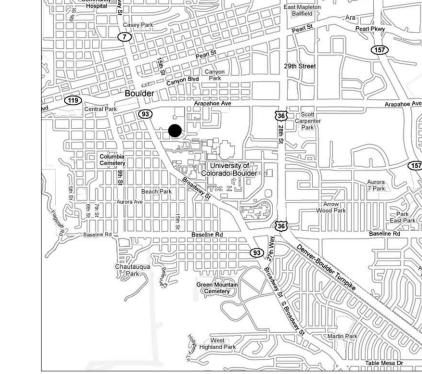

VICINITY MAP

INDEX & ABBREVIATIONS

Schematic Design

Project Number:

May 23, 2008

AndersonMasonDale Architects

CU Institute of

2007025.00

453 UCB Boulder, CO 80309

Architect

1615 17th Street Denver, CO, 80202 Telephone: 303-294-9448 FAX: 303-294-0762

E-mail (optional)

Landscape

Structural Martin Martin

Denver, CO 80210 Telephone: 303-733-7558 FAX: 303-733-0959

12499 West Colfax Avenue Lakewood, CO 80215 Telephone: 303-431-6100 FAX: 303-431-6866

Mechanical / Plumbing

Lakewood, CO 80235 Telephone: 303-986-8200 FAX: 303-986-8222

BCER Engineering 5420 Ward Road, Suite 200

Arvada, CO 80002 Telephone: 303-422-7400 FAX: 303-422-7900

IT / Telecom / AV

Rimrock Group 2060 Briargate Parkway, Suite 220 Colorado Springs, CO 80920 Telephone: 719-533-1112 FAX: 719-533-1113

Lerch Bates 7899 South Lincoln Court, Suite 204 Littleton, CO 80122 Telephone: 720-283-8182 FAX: 720-283-8184

Electrical

Elevator

Shaffer Baucom 7333 West Jefferson Avenue, Suite 230

Denver, CO 80222 Telephone: 720-540-6885

Civil SEH, Inc.

Behavioral Science

Grandview Avenue and 15th Street

University of Colorado at Boulder

Department of Facilities Management Planning, Design and Construction Research Laboratory 2 1540 30th Street, 3rd Floor

AndersonMasonDale Architects, P.C.

Colorado Center Tower One, Suite 6000 2000 South Colorado Boulevard

Lime Green Design 900 East Louisiana Avenue, Suite 209

	UTE OF BEHAVIORAL SC	IENCE	5/23/2008
PPLICABLE CODES			
06 INTERNATIONAL BUILDING CODE 06 INTERNATIONAL MECHANICAL CODE			
06 INTERNATIONAL ENERGY CONSERVATION CODE 05 NATIONAL ELECTRICAL CODE 06 INTERNATIONAL PLUMBING CODE			
06 INTERNATIONAL FUEL GAS CODE HE NATIONAL FIRE PROTECTION ASSOCIATION STANDARDS			
004 ASME BOILER AND PRESSURE VESSEL CODE 004 NATIONAL BOILER INSPECTION CODE			
004 CONTROLS AND SAFETY DEVICES FOR AUTOMATICALLY FIRE 004 BOILER AND COMBUSTION SYSTEMS HAZARDS CODE, NFPA	85		
003] ANSI/ICC A117.1, ACCESSIBLE AND USABLE BUILDINGS AND 106 INTERNATIONAL FIRE CODE	FACILITIES		
URISDICTION			
NIVERSITY OF COLORADO AT BOULDER			· ·
BUILDING INFORMATION	INSTITUTE OF BEHAVIORAL SCIENCE		
DILDING	15TH STREET & GRANDVIEW AVENUE		
PROPRIETON	GRANDVIEW TERRACE, CAMPUS OF UNIVE	ERSITY OF COLORADO AT BOULDER, BOULDER, CO	
ESCRIPTION	THE BASEMENT IS COMPRISED OF STORA	GE ROOMS AND A MECHANICAL ROOM ROOM, LIBRARY AND COMPUTER TRAINING LAB	
	LEVELS TWO, THREE AND FOUR PROVIDE 48,00 GROSS SQUARE FEET	HIGHER EDUCATIONAL FACULTY OFFICES	
<u>ENERAL</u>	MIXED OCCUPANCIES, B AND A-3 WITH INC CONSTRUCTION TYPE IS II-B WITH SEPARA	CIDENTAL USE AREAS ATED OCCUPANCIES IN ACCORDANCE WITH 508.3.3	
	FIRE SPRINKLER PROVIDED THROUGHOU STANDPIPE SYSTEM: CLASS 1	T PER NFPA 13	
XCEPTIONS TAKEN DUE TO FIRE SI	PRINKLER PROTECTION		
EIGHT INCREASE CIDENTAL USE PROTECTION REDUCTION	IBC 504.2 IBC TABLE 508.2		
CCUPANCY SEPARATION FOR STORAGE AREAS IN GROUP B	IBC TABLE 508.3.3 FOOTNOTE B EX 2		
VO STORY OPENING ALLOWED NPROTECTED OPENING INCREASE ERTICAL SEPARATION OF OPENINGS	IBC 707.2 EX 7-7.1 IBC 704.8.1 IBC 704.9 EX 2		
IMINATE ELEVATOR LOBBY FANDPIPE CLASS SUBSTITUTION	IBC 707.14.1 EX 4 IBC 905.3.1 EX 1		
FANDPIPE LATERAL PROTECTION REDUCTION RE ALARM SYSTEM ANUAL FIRE ALARM REDUCTIONS	IBC 905.4.1 EX IBC 907.2.2 GROUP B IBC 907.2.2 GROUP B		
XIT STAIRWAY REDUCTIONS OMMON PATH OF EGRESS TRAVEL	IBC 1007.3 EX 2 AND 3 IBC 1014.3 EX 1		
EPARATION OF EXIT REDUCTION KIT ACCESS TRAVEL DISTANCE INCREASE DERIDOR FIRE-RESISTANCE RATING	IBC 1015.2.1 EX 2 IBC 1016.1 IBC 1017.1		
DRRIDOR FIRE-RESISTANCE RATING EAD END CORRIDORS KIT DISCHARGE	IBC 1017.1 IBC 1017.3 EX 2 IBC 1024.1 EX 1		
RTABLE FIRE EXTINGUISHERS	IFC 906.1.1 AND 906.1.6		
IEIGHT AND AREA			
DISTRUCTION TYPE LOWABLE FLOOR AREA	9,500 SF / STORY	A-3 OCCUPANCY	TABLE 50
	23,000 SF / STORY	B OCCUPANCY	TABLE 50
REA MODIFICATIONS CTUAL FLOOR AREA	NONE TAKEN		
TORE LEGISTATES	BASEMENT	7,600 SF - B OCCUPANCY	
	LEVEL ONE	6,646 SF - B OCCUPANCY	6,646 SF / 23,000 SF + 1,850 SF / 9,500 SF = 0.48
		1,850 SF - A-3 OCCUPANCY	ACTUAL/ALLOWABLE (B) + ACTUAL/ALLOWABLE (S-1) < 1.0 PER IBC
	LEVEL TWO	11,476 SF - B OCCUPANCY	508.3.3.2
	LEVEL THREE	11,279 SF - B OCCUPANCY	
	LEVEL FOUR	9,974 SF - B OCCUPANCY	
LLOWABLE HEIGHT	4 STORIES - 55 FEET		TABLE 50
LLOWABLE HEIGHT SEPARATED OCCUPANCIES		THE HEIGHT LIMITATIONS BASED ON THE TYPE OF ORDANCE WITH 503.1. A-3 OCCUPANCY CANNOT BE LOCATED	IBC 508.3.3
	ANY HIGHER THAN THE SECOND STORY		
CTUAL HEIGHT	4 STORIES (75 FEET FROM EAST GRADE P	***	
EIGHT MODIFICATIONS	AUTOMATIC SPRINKLER INCREASE = ADDI	TIONAL 20 FEET OF HEIGHT	
JSE AND OCCUPANCY CCUPANCY CLASSIFICATION	GROUP A-3 - ASSEMBLY	EX 1: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT	
SCOT ANCT GEASSIFICATION		EX 1. SI AGE OSED I ON ASSEMBLI WITH AN OCCOI ANT	IBC 303
	GROUF A-3 - ASSEMBLT	LOAD OF LESS THAN 50 PERSONS SHALL BE CLASSIFIED AS GROUP B	5
	GROUP AS - ASSEMBLY	GROUP E EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT	S 3
	GROUP AS - ASSEMBLY	GROUP E	5
	GROUP A'S - AGSEMBET	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 750 SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY	
	GROUP A'S - AGSEMBET	GROUP E EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 750	
	GROUP B - BUSINESS	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 750 SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY	
XED USE AND OCCUPANCY	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 750 SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E IBC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND S-1 PROVIDED	BC 304
XED USE AND OCCUPANCY	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 750 SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E IBC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO	IBC 304
XED USE AND OCCUPANCY	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED FROM ADJACENT OCCUPANCIES IN ACCORDANCE WITH TABLE 508.3.3	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 750 SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E IBC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND S-1 PROVIDED AUTOMATIC SPRINKLER SYSTEM IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1.	IBC 304
XED USE AND OCCUPANCY	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED FROM ADJACENT OCCUPANCIES IN	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 750 SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E IBC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND S-1 PROVIDED AUTOMATIC SPRINKLER SYSTEM IS INSTALLED IN	IBC 304
XED USE AND OCCUPANCY	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED FROM ADJACENT OCCUPANCIES IN ACCORDANCE WITH TABLE 508.3.3 1-HOUR SEPARATION TO BE PROVIDED	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 750 SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E IBC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND S-1 PROVIDED AUTOMATIC SPRINKLER SYSTEM IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1. FOOTNOTE "b" OF TABLE 508.3.3 STATES OCCUPANCY SEPARATION DOES NOT NEED TO BE PROVIDED FOR STORAGE AREAS WITHIN GROUPS B AND M IF THE AREA IS: 1. LESS THAN 10% OF FLOOR AREA	
XED USE AND OCCUPANCY	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED FROM ADJACENT OCCUPANCIES IN ACCORDANCE WITH TABLE 508.3.3 1-HOUR SEPARATION TO BE PROVIDED	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 750 SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E IBC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND S-1 PROVIDED AUTOMATIC SPRINKLER SYSTEM IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1. FOOTNOTE "b" OF TABLE 508.3.3 STATES OCCUPANCY SEPARATION DOES NOT NEED TO BE PROVIDED FOR STORAGE AREAS WITHIN GROUPS B AND M IF THE AREA IS:	IBC 304
XED USE AND OCCUPANCY	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED FROM ADJACENT OCCUPANCIES IN ACCORDANCE WITH TABLE 508.3.3 1-HOUR SEPARATION TO BE PROVIDED	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 750 SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E IBC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND S-1 PROVIDED AUTOMATIC SPRINKLER SYSTEM IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1. FOOTNOTE "b" OF TABLE 508.3.3 STATES OCCUPANCY SEPARATION DOES NOT NEED TO BE PROVIDED FOR STORAGE AREAS WITHIN GROUPS B AND M IF THE AREA IS: 1. LESS THAN 10% OF FLOOR AREA 2. AREA IS EQUIPPED WITH AN AUTOMATIC FIRE-EXTINGUISHING SYSTEM AND IS LESS THAN 3,000 SF 3. AREA IS LESS THAN 1,000 SF	IBC 304
	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED FROM ADJACENT OCCUPANCIES IN ACCORDANCE WITH TABLE 508.3.3 1-HOUR SEPARATION TO BE PROVIDED	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 750 SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E IBC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND S-1 PROVIDED AUTOMATIC SPRINKLER SYSTEM IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1. FOOTNOTE "b" OF TABLE 508.3.3 STATES OCCUPANCY SEPARATION DOES NOT NEED TO BE PROVIDED FOR STORAGE AREAS WITHIN GROUPS B AND M IF THE AREA IS: 1. LESS THAN 10% OF FLOOR AREA 2. AREA IS EQUIPPED WITH AN AUTOMATIC FIRE-EXTINGUISHING SYSTEM AND IS LESS THAN 3,000 SF	IBC 304
BUILDING LOCATION	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED FROM ADJACENT OCCUPANCIES IN ACCORDANCE WITH TABLE 508.3.3 1-HOUR SEPARATION TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 750 SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E IBC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND S-1 PROVIDED AUTOMATIC SPRINKLER SYSTEM IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1. FOOTNOTE "b" OF TABLE 508.3.3 STATES OCCUPANCY SEPARATION DOES NOT NEED TO BE PROVIDED FOR STORAGE AREAS WITHIN GROUPS B AND M IF THE AREA IS: 1. LESS THAN 10% OF FLOOR AREA 2. AREA IS EQUIPPED WITH AN AUTOMATIC FIRE-EXTINGUISHING SYSTEM AND IS LESS THAN 3,000 SF 3. AREA IS LESS THAN 1,000 SF	IBC 304
BUILDING LOCATION TIRE RESISTANCE RATED CONSTRU	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED FROM ADJACENT OCCUPANCIES IN ACCORDANCE WITH TABLE 508.3.3 1-HOUR SEPARATION TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 750 SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E IBC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND S-1 PROVIDED AUTOMATIC SPRINKLER SYSTEM IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1. FOOTNOTE "b" OF TABLE 508.3.3 STATES OCCUPANCY SEPARATION DOES NOT NEED TO BE PROVIDED FOR STORAGE AREAS WITHIN GROUPS B AND M IF THE AREA IS: 1. LESS THAN 10% OF FLOOR AREA 2. AREA IS EQUIPPED WITH AN AUTOMATIC FIRE-EXTINGUISHING SYSTEM AND IS LESS THAN 3,000 SF 3. AREA IS LESS THAN 1,000 SF	IBC 304
SUILDING LOCATION IRE RESISTANCE RATED CONSTRUENT TYPE	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED FROM ADJACENT OCCUPANCIES IN ACCORDANCE WITH TABLE 508.3.3 1-HOUR SEPARATION TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 750 SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E IBC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND S-1 PROVIDED AUTOMATIC SPRINKLER SYSTEM IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1. FOOTNOTE "b" OF TABLE 508.3.3 STATES OCCUPANCY SEPARATION DOES NOT NEED TO BE PROVIDED FOR STORAGE AREAS WITHIN GROUPS B AND M IF THE AREA IS: 1. LESS THAN 10% OF FLOOR AREA 2. AREA IS EQUIPPED WITH AN AUTOMATIC FIRE-EXTINGUISHING SYSTEM AND IS LESS THAN 3,000 SF 3. AREA IS LESS THAN 1,000 SF	IBC 508.3
BUILDING LOCATION TIRE RESISTANCE RATED CONSTRUENT TYPE TRUCTURAL FRAME (TERIOR BEARING WALLS	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED FROM ADJACENT OCCUPANCIES IN ACCORDANCE WITH TABLE 508.3.3 1-HOUR SEPARATION TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 CTION II-B - NON COMBUSTIBLE 0 HR *	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 750 SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E IBC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND S-1 PROVIDED AUTOMATIC SPRINKLER SYSTEM IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1. FOOTNOTE "b" OF TABLE 508.3.3 STATES OCCUPANCY SEPARATION DOES NOT NEED TO BE PROVIDED FOR STORAGE AREAS WITHIN GROUPS B AND M IF THE AREA IS: 1. LESS THAN 10% OF FLOOR AREA 2. AREA IS EQUIPPED WITH AN AUTOMATIC FIRE-EXTINGUISHING SYSTEM AND IS LESS THAN 3,000 SF 3. AREA IS LESS THAN 1,000 SF	IBC 508.3 IBC 508.3 IBC 508.3 IBC TABLE 60
SUILDING LOCATION IRE RESISTANCE RATED CONSTRUE DINSTRUCTION TYPE RUCTURAL FRAME ITERIOR BEARING WALLS TERIOR BEARING WALLS	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED FROM ADJACENT OCCUPANCIES IN ACCORDANCE WITH TABLE 508.3.3 1-HOUR SEPARATION TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 CTION II-B - NON COMBUSTIBLE 0 HR *	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 750 SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E IBC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND S-1 PROVIDED AUTOMATIC SPRINKLER SYSTEM IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1. FOOTNOTE "b" OF TABLE 508.3.3 STATES OCCUPANCY SEPARATION DOES NOT NEED TO BE PROVIDED FOR STORAGE AREAS WITHIN GROUPS B AND M IF THE AREA IS: 1. LESS THAN 10% OF FLOOR AREA 2. AREA IS EQUIPPED WITH AN AUTOMATIC FIRE-EXTINGUISHING SYSTEM AND IS LESS THAN 3,000 SF 3. AREA IS LESS THAN 1,000 SF	IBC 508.3 IBC 508.3 IBC TABLE 60 IBC TABLE 60
SUILDING LOCATION IRE RESISTANCE RATED CONSTRUENTS DIAGRAM STRUCTION TYPE RUCTURAL FRAME STERIOR BEARING WALLS STERIOR NONBEARING WALLS AND PARTITIONS	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED FROM ADJACENT OCCUPANCIES IN ACCORDANCE WITH TABLE 508.3.3 1-HOUR SEPARATION TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 II-B - NON COMBUSTIBLE 0 HR *	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 750 SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E IBC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND S-1 PROVIDED AUTOMATIC SPRINKLER SYSTEM IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1. FOOTNOTE "b" OF TABLE 508.3.3 STATES OCCUPANCY SEPARATION DOES NOT NEED TO BE PROVIDED FOR STORAGE AREAS WITHIN GROUPS B AND M IF THE AREA IS: 1. LESS THAN 10% OF FLOOR AREA 2. AREA IS EQUIPPED WITH AN AUTOMATIC FIRE-EXTINGUISHING SYSTEM AND IS LESS THAN 3,000 SF 3. AREA IS LESS THAN 1,000 SF	IBC 508.3 IBC 508.3 IBC 508.3 IBC TABLE 60 IBC TABLE 60 IBC TABLE 60
UILDING LOCATION IRE RESISTANCE RATED CONSTRU INSTRUCTION TYPE RUCTURAL FRAME TERIOR BEARING WALLS TERIOR NONBEARING WALLS AND PARTITIONS TERIOR NONBEARING WALLS AND PARTITIONS	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED FROM ADJACENT OCCUPANCIES IN ACCORDANCE WITH TABLE 508.3.3 1-HOUR SEPARATION TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 CTION II-B - NON COMBUSTIBLE 0 HR * 0 HR *	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 750 SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E IBC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND S-1 PROVIDED AUTOMATIC SPRINKLER SYSTEM IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1. FOOTNOTE "b" OF TABLE 508.3.3 STATES OCCUPANCY SEPARATION DOES NOT NEED TO BE PROVIDED FOR STORAGE AREAS WITHIN GROUPS B AND M IF THE AREA IS: 1. LESS THAN 10% OF FLOOR AREA 2. AREA IS EQUIPPED WITH AN AUTOMATIC FIRE-EXTINGUISHING SYSTEM AND IS LESS THAN 3,000 SF 3. AREA IS LESS THAN 1,000 SF	IBC 304 IBC 508.3 IBC 508.3 IBC TABLE 60
BUILDING LOCATION IRE RESISTANCE RATED CONSTRUE DINSTRUCTION TYPE RUCTURAL FRAME STERIOR BEARING WALLS ITERIOR NONBEARING WALLS AND PARTITIONS TERIOR NONBEARING WALLS AND PARTITIONS OOR CONSTRUCTION	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED FROM ADJACENT OCCUPANCIES IN ACCORDANCE WITH TABLE 508.3.3 1-HOUR SEPARATION TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 II-B - NON COMBUSTIBLE 0 HR * 0 HR * 0 HR * 0 HR *	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 75 SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E IBC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND S-1 PROVIDED AUTOMATIC SPRINKLER SYSTEM IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1. FOOTNOTE "b" OF TABLE 508.3.3 STATES OCCUPANCY SEPARATION DOES NOT NEED TO BE PROVIDED FOR STORAGE AREAS WITHIN GROUPS B AND M IF THE AREA IS: 1. LESS THAN 10% OF FLOOR AREA 2. AREA IS EQUIPPED WITH AN AUTOMATIC FIRE-EXTINGUISHING SYSTEM AND IS LESS THAN 3,000 SF SHOWN ON CODE STUDY G-102	IBC 304 IBC 508.3 IBC 508.3 IBC TABLE 60
BUILDING LOCATION IRE RESISTANCE RATED CONSTRUE DINSTRUCTION TYPE RUCTURAL FRAME STERIOR BEARING WALLS ITERIOR NONBEARING WALLS AND PARTITIONS TERIOR NONBEARING WALLS AND PARTITIONS OOR CONSTRUCTION	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED FROM ADJACENT OCCUPANCIES IN ACCORDANCE WITH TABLE 508.3.3 1-HOUR SEPARATION TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 II-B - NON COMBUSTIBLE 0 HR * 0 HR * 0 HR * 0 HR *	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 750 SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E IBC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND S-1 PROVIDED AUTOMATIC SPRINKLER SYSTEM IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1. FOOTNOTE "b" OF TABLE 508.3.3 STATES OCCUPANCY SEPARATION DOES NOT NEED TO BE PROVIDED FOR STORAGE AREAS WITHIN GROUPS B AND M IF THE AREA IS: 1. LESS THAN 10% OF FLOOR AREA 2. AREA IS EQUIPPED WITH AN AUTOMATIC FIRE-EXTINGUISHING SYSTEM AND IS LESS THAN 3,000 SF 3. AREA IS LESS THAN 1,000 SF	IBC 304 IBC 508.3 IBC 508.3 IBC TABLE 60
BUILDING LOCATION IRE RESISTANCE RATED CONSTRUE DINSTRUCTION TYPE RUCTURAL FRAME STERIOR BEARING WALLS TERIOR BEARING WALLS TERIOR NONBEARING WALLS AND PARTITIONS TERIOR NONBEARING WALLS AND PARTITIONS OOR CONSTRUCTION DOF CONSTRUCTION	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED FROM ADJACENT OCCUPANCIES IN ACCORDANCE WITH TABLE 508.3.3 1-HOUR SEPARATION TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 II-B - NON COMBUSTIBLE 0 HR * 0 HR * 0 HR * 0 HR * 10 HR * 10 HR * 11 HOUR SEPARATION TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 WILLIAM TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 WILLIAM TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 WILLIAM TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 O HR * 10 HR * 10 HR * 11 HOUR SEPARATION TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 WILLIAM TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 O HR * 12 HOURS WHEN CONNECTING FOUR OR METHOD BETWEEN BOTH TO BETWEEN BARRIERS 2 HOURS WHEN CONNECTING FOUR OR METHOD BETWEEN BETWEEN BOTH TO BETWEEN BET	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 750 SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E IBC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND S-1 PROVIDED AUTOMATIC SPRINKLER SYSTEM IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1. FOOTNOTE "b" OF TABLE 508.3 STATES OCCUPANCY SEPARATION DOES NOT NEED TO BE PROVIDED FOR STORAGE AREAS WITHIN GROUPS B AND M IF THE AREA IS: 1. LESS THAN 10% OF FLOOR AREA 2. AREA IS EQUIPPED WITH AN AUTOMATIC FIRE-EXTINGUISHING SYSTEM AND IS LESS THAN 3,000 SF SHOWN ON CODE STUDY G-102 RUCTURAL FRAMES OR LOAD BEARING WALLS SHALL BE 1 DUR RATED SHAFT, STAIRWAY, HOIST WAYS AND SIMILAR FIRE ORE STORIES	IBC 508.3 IBC 508.3 IBC 508.3 IBC TABLE 60
BUILDING LOCATION IRE RESISTANCE RATED CONSTRU DINSTRUCTION TYPE RUCTURAL FRAME KTERIOR BEARING WALLS TERIOR BEARING WALLS TERIOR NONBEARING WALLS AND PARTITIONS TERIOR NONBEARING WALLS AND PARTITIONS OOR CONSTRUCTION DOF CONSTRUCTION	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED FROM ADJACENT OCCUPANCIES IN ACCORDANCE WITH TABLE 508.3.3 1-HOUR SEPARATION TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 II-B - NON COMBUSTIBLE 0 HR * 0 HR * 0 HR * 0 HR * 1 HR *	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 750 SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E IBC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND S-1 PROVIDED AUTOMATIC SPRINKLER SYSTEM IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1. FOOTNOTE "b" OF TABLE 508.3 STATES OCCUPANCY SEPARATION DOES NOT NEED TO BE PROVIDED FOR STORAGE AREAS WITHIN GROUPS B AND M IF THE AREA IS: 1. LESS THAN 10% OF FLOOR AREA 2. AREA IS EQUIPPED WITH AN AUTOMATIC FIRE-EXTINGUISHING SYSTEM AND IS LESS THAN 3,000 SF SHOWN ON CODE STUDY G-102 RUCTURAL FRAMES OR LOAD BEARING WALLS SHALL BE 1 DUR RATED SHAFT, STAIRWAY, HOIST WAYS AND SIMILAR FIRE ORE STORIES	IBC 508.3 IBC 508.3 IBC 508.3 IBC 603 IBC TABLE 60
BUILDING LOCATION IRE RESISTANCE RATED CONSTRU DINSTRUCTION TYPE RUCTURAL FRAME STERIOR BEARING WALLS TERIOR BEARING WALLS TERIOR NONBEARING WALLS AND PARTITIONS TERIOR NONBEARING WALLS AND PARTITIONS OOR CONSTRUCTION DOF CONSTRUCTION	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED FROM ADJACENT OCCUPANCIES IN ACCORDANCE WITH TABLE 508.3.3 1-HOUR SEPARATION TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 II-B - NON COMBUSTIBLE 0 HR * 0 HR * 0 HR * 0 HR * 10 HR * 10 HR * 11 HOUR SEPARATION TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 WILLIAM TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 WILLIAM TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 WILLIAM TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 O HR * 10 HR * 10 HR * 11 HOUR SEPARATION TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 WILLIAM TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 O HR * 12 HOURS WHEN CONNECTING FOUR OR METHOD BETWEEN BOTH TO BETWEEN BARRIERS 2 HOURS WHEN CONNECTING FOUR OR METHOD BETWEEN BETWEEN BOTH TO BETWEEN BET	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 750 SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E IBC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND S-1 PROVIDED AUTOMATIC SPRINKLER SYSTEM IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1. FOOTNOTE "b" OF TABLE 508.3 STATES OCCUPANCY SEPARATION DOES NOT NEED TO BE PROVIDED FOR STORAGE AREAS WITHIN GROUPS B AND M IF THE AREA IS: 1. LESS THAN 10% OF FLOOR AREA 2. AREA IS EQUIPPED WITH AN AUTOMATIC FIRE-EXTINGUISHING SYSTEM AND IS LESS THAN 3,000 SF SHOWN ON CODE STUDY G-102 RUCTURAL FRAMES OR LOAD BEARING WALLS SHALL BE 1 DUR RATED SHAFT, STAIRWAY, HOIST WAYS AND SIMILAR FIRE ORE STORIES	IBC 304 IBC 508.3 IBC 508.3 IBC 508.4 IBC TABLE 60
BUILDING LOCATION FIRE RESISTANCE RATED CONSTRUENTS CONSTRUCTION TYPE FRUCTURAL FRAME CITERIOR BEARING WALLS TERIOR NONBEARING WALLS TERIOR NONBEARING WALLS AND PARTITIONS TERIOR NONBEARING WALLS AND PARTITIONS COOR CONSTRUCTION DOF CONSTRUCTION HAFTS CERRIDOR FIRE RESISTANCE RATING	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED FROM ADJACENT OCCUPANCIES IN ACCORDANCE WITH TABLE 508.3.3 1-HOUR SEPARATION TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 II-B - NON COMBUSTIBLE 0 HR * 0 HR * 0 HR * 1 HOUR RATED WHERE THEY SUPPORT 1-HE BARRIERS 2 HOURS WHEN CONNECTING FOUR OR ME HAVE AND FOUND TO ME HAVE AND FOUN	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 75 SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E BIG TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND S-1 PROVIDED AUTOMATIC SPRINKLER SYSTEM IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1. FOOTNOTE "b" OF TABLE 508.3.3 STATES OCCUPANCY SEPARATION DOES NOT NEED TO BE PROVIDED FOR STORAGE AREAS WITHIN GROUPS B AND M IF THE AREA IS: 1. LESS THAN 10% OF FLOOR AREA 2. AREA IS EQUIPPED WITH AN AUTOMATIC FIRE-EXTINGUISHING SYSTEM AND IS LESS THAN 3,000 SF SHOWN ON CODE STUDY G-102 RUCTURAL FRAMES OR LOAD BEARING WALLS SHALL BE 1 DUR RATED SHAFT, STAIRWAY, HOIST WAYS AND SIMILAR FIRE ORE STORIES OUR STORIES	IBC 304 IBC 508.3 IBC 508.3 IBC TABLE 60
BUILDING LOCATION FIRE RESISTANCE RATED CONSTRUENTS CONSTRUCTION TYPE FRUCTURAL FRAME CITERIOR BEARING WALLS TERIOR NONBEARING WALLS TERIOR NONBEARING WALLS AND PARTITIONS TERIOR NONBEARING WALLS AND PARTITIONS COOR CONSTRUCTION DOF CONSTRUCTION HAFTS CERRIDOR FIRE RESISTANCE RATING	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED FROM ADJACENT OCCUPANCIES IN ACCORDANCE WITH TABLE 508.3.3 1-HOUR SEPARATION TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 II-B - NON COMBUSTIBLE 0 HR * 0 HR * 0 HR * 1 HOUR WHEN CONNECTING FOUR OR METHOR WHEN CONNECTING LESS THAN FOUR WHEN CONNECTING LESS THAN FOUR WHEN CONNECTING FOUR OR METHOR WHEN CONNECTING FOUR OR METHOR WHEN CONNECTING FOUR OR METHOR WHEN CONNECTING LESS THAN FOUR WHEN CONNECTING LESS T	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 75/S SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E IBC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND 5-1 PROVIDED AUTOMATIC SPRINKLER SYSTEM IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1. FOOTNOTE "b" OF TABLE 508.3 STATES OCCUPANCY SEPARATION DOES NOT NEED TO BE PROVIDED FOR STORAGE AREAS WITHIN GROUPS B AND M IF THE AREA IS: 1. LESS THAN 10% OF FLOOR AREA 2. AREA IS EQUIPPED WITH AN AUTOMATIC FIRE-EXTINGUISHING SYSTEM AND IS LESS THAN 3,000 SF 3. AREA IS LESS THAN 1,000 SF SHOWN ON CODE STUDY G-102 RUCTURAL FRAMES OR LOAD BEARING WALLS SHALL BE 1 DUR RATED SHAFT, STAIRWAY, HOIST WAYS AND SIMILAR FIRE ORE STORIES OUR STORIES OUR STORIES OUR STORIES	IBC 304 IBC 508.3 IBC 508.3 IBC TABLE 60 IBC 707
BUILDING LOCATION FIRE RESISTANCE RATED CONSTRUENTS CONSTRUCTION TYPE TRUCTURAL FRAME KITERIOR BEARING WALLS ITERIOR NONBEARING WALLS ITERIOR NONBEARING WALLS AND PARTITIONS TORRIDOR CONSTRUCTION COOF CONSTRUCTION COOF CONSTRUCTION CORRIDOR FIRE RESISTANCE RATING	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED FROM ADJACENT OCCUPANCIES IN ACCORDANCE WITH TABLE 508.3.3 1-HOUR SEPARATION TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 II-B - NON COMBUSTIBLE 0 HR * 0 HR * 0 HR * 1 HOUR WHEN CONNECTING FOUR OR METHOR WHEN CONNECTING LESS THAN FOUR WHEN CONNECTING LESS THAN FOUR WHEN CONNECTING FOUR OR METHOR WHEN CONNECTING FOUR OR METHOR WHEN CONNECTING FOUR OR METHOR WHEN CONNECTING LESS THAN FOUR WHEN CONNECTING LESS T	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 75/S SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E BIGC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND S.1 PROVIDED AUTOMATIC SPRINKLER SYSTEM IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1. FOOTNOTE "b" OF TABLE 508.3.3 STATES OCCUPANCY SEPARATION DOES NOT NEED TO BE PROVIDED FOR STORAGE AREAS WITHIN GROUPS B AND M IF THE AREA IS: 1. LESS THAN 10% OF FLOOR AREA 2. AREA IS EQUIPPED WITH AN AUTOMATIC FIRE-EXTINGUISHING SYSTEM AND IS LESS THAN 3,000 SF 3. AREA IS LESS THAN 1,000 SF SHOWN ON CODE STUDY G-102 RUCTURAL FRAMES OR LOAD BEARING WALLS SHALL BE 1 DUR RATED SHAFT, STAIRWAY, HOIST WAYS AND SIMILAR FIRE ORE STORIES OUR STORIES OUR STORIES	IBC 304 IBC 508.3 IBC 508.3 IBC TABLE 60 IBC 7076
BUILDING LOCATION FIRE RESISTANCE RATED CONSTRUENTS DISTRUCTION TYPE TRUCTURAL FRAME KTERIOR BEARING WALLS ITERIOR BEARING WALLS KTERIOR NONBEARING WALLS AND PARTITIONS ITERIOR NONBEARING WALLS AND PARTITIONS OOR CONSTRUCTION COPPONSTRUCTION COPPONSTRUCTION CORRIDOR FIRE RESISTANCE RATING TAIRWAY ENCLOSURES	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED FROM ADJACENT OCCUPANCIES IN ACCORDANCE WITH TABLE 508.3.3 1-HOUR SEPARATION TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 II-B - NON COMBUSTIBLE 0 HR * 0 HR * 0 HR * 0 HR * 1 HO HR * 1 HO HR * 1 HO HR * 1 HO HR * 1 HOUR WHEN CONNECTING FOUR OR MENT HOUR WHEN CONNECTING LESS THAN FOUR HEAD CONNECTING LESS TH	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 75/S SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E IBC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND 5-1 PROVIDED AUTOMATIC SPRINKLER SYSTEM IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1. FOOTNOTE "b" OF TABLE 508.3 STATES OCCUPANCY SEPARATION DOES NOT NEED TO BE PROVIDED FOR STORAGE AREAS WITHIN GROUPS B AND M IF THE AREA IS: 1. LESS THAN 10% OF FLOOR AREA 2. AREA IS EQUIPPED WITH AN AUTOMATIC FIRE-EXTINGUISHING SYSTEM AND IS LESS THAN 3,000 SF 3. AREA IS LESS THAN 1,000 SF SHOWN ON CODE STUDY G-102 RUCTURAL FRAMES OR LOAD BEARING WALLS SHALL BE 1 DUR RATED SHAFT, STAIRWAY, HOIST WAYS AND SIMILAR FIRE ORE STORIES OUR STORIES OUR STORIES OUR STORIES	IBC 508.3 IBC 508.3 IBC 508.3 IBC TABLE 60 IBC TABLE 6
BUILDING LOCATION FIRE RESISTANCE RATED CONSTRU DISTRUCTION TYPE TRUCTURAL FRAME XTERIOR BEARING WALLS ITERIOR BEARING WALLS ITERIOR NONBEARING WALLS AND PARTITIONS ITERIOR NONBEARING WALLS AND PARTITIONS OOR CONSTRUCTION OOF CONSTRUCTION HAFTS DORRIDOR FIRE RESISTANCE RATING TAIRWAY ENCLOSURES	GROUP B - BUSINESS SEPARATED OCCUPANCIES - INDIVIDUAL OCCUPANCIES SHALL BE SEPARATED FROM ADJACENT OCCUPANCIES IN ACCORDANCE WITH TABLE 508.3.3 1-HOUR SEPARATION TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 II-B - NON COMBUSTIBLE 0 HR * 0 HR * 0 HR * 0 HR * 1 HOR * 1 HOR SEPARATION TO BE PROVIDED BETWEEN B OCCUPANCY AND A-3 II-B - NON COMBUSTIBLE 1 HR * 1 HOUR WHEN CONNECTING FOUR OR MENT ATTENDED AND FOUR AN	EX 2: SPACE USED FOR ASSEMBLY WITH AN OCCUPANT LOAD OF LESS THAN 50 PERSONS AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E EX 3: SPACE USED FOR ASSEMBLY THAT IS LESS THAN 75/ SF IN AREA AND IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS GROUP E BIC TABLE 508.3 SEPARATION OF OCCUPANCIES: NO SEPARATION REQUIRED BETWEEN B AND 5-1 PROVIDED AUTOMATIC SPRINKLER SYSTEM IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1. FOOTNOTE 'b' 'OF TABLE 508.3.3 STATES OCCUPANCY SEPARATION DOES NOT NEED TO BE PROVIDED FOR STORAGE AREAS WITHIN GROUPS B AND M IF THE AREA IS: 1. LESS THAN 10% OF FLOOR AREA 2. AREA IS EQUIPPED WITH AN AUTOMATIC FIRE-EXTINGUISHING SYSTEM AND IS LESS THAN 3,000 SF 3. AREA IS LESS THAN 1,000 SF SHOWN ON CODE STUDY G-102 PROTURAL FRAMES OR LOAD BEARING WALLS SHALL BE 1 DUR RATED SHAFT, STAIRWAY, HOIST WAYS AND SIMILAR FIRE ORE STORIES OUR STORIES OUR STORIES OUR STORIES ROTHER THAN UNPROTECTED EXTERIOR OPENINGS SHALL XIT ACCESS FROM OCCUPIED SPACES AND EGRESS FROM THE INCIDES: NO SEPARATION REQUIRED BETWEEN B AND S-1 M IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1. DOCCUPANCY SEPARATION REQUIRED BETWEEN B AND S-1 M IS INSTALLED IN ACCORDANCE WITH SECTION 903.3.1.1.	IBC 304 IBC 508.3 IBC 508.3 IBC TABLE 60 IBC 707

	2. AREA IS EQUIPPED WITH AN AUTOMATIC 3. AREA IS LESS THAN 1,000 SF	FIRE-EXTINGUISHING SYSTEM AND IS < 3,000 SF	
<u>ATRIUMS</u>		TRIUMS THAT ONLY CONNECT TWO STORIES OM ADJACENT SPACES BY A ONE-HOUR FIRE BARRIER	IBC 404
	CONSTRUCTED IN ACCORDANCE WITH 706 WITH 711, EXCEPTION 1 PERMITS A GLASS	OR HORIZONTAL ASSEMBLY CONSTRUCTED IN ACCORDANCE WALL FORMING A SMOKE PARTITION WITH AUTOMATIC S OF WALL OF A SINGLE SIDE OF THE WALL IF THERE IS NOT A	
	STANDBY POWER SYSTEM PROVIDED FOR	SMOKE EXHAUST SYSTEM	IBC 404.6 AND IBC 909.
	INSPECTION AND TEST REQUIREMENTS OF	SYSTEM WILL BE SUBMITTED IN ACCORDANCE WITH 909.3	IBC 909
	CFD MODELING TO BE PERFORMED DURING THROUGH 909.9	G DESIGN DEVELOPMENT PHASE TO COMPLY WITH 909.4	IBC 908
	SMOKE CONTROL PANEL PROVIDED AT SOL		IBC 909.
EXTERIOR WALL OPENINGS		ORE THAN 10 FEET. ALL EXTERIOR OPENINGS WITH FIRE IN A TYPE II-B CONSTRUCTION ARE UNPROTECTED AND DO I.8 FOOTNOTE "I"	>30 FT IBC TABLE 704
FLOOR OPENINGS	FLOOR OPENINGS ARE PROVIDED ON LEVEL TWO AND LEVEL FOUR	IN OTHER THAN GROUPS I-2 AND I-3, A SHAFT ENCLOSURE IS NOT REQUIRED FOR A FLOOR OPENING OR AN AIR	IBC 707.2. EX
		TRANSFER OPENING THAT COMPLIES WITH THE FOLLOWING: 7.1. DOES NOT CONNECT MORE THAN TWO STORIES.	
		7.2. IS NOT PART OF THE REQUIRED MEANS OF EGRESS SYSTEM, EXCEPT AS PERMITTED IN SECTION 1020.1.	
		7.3. IS NOT CONCEALED WITHIN THE BUILDING	
		7.4. IS NOT OPEN TO A CORRIDOR IN GROUP I AND R OCCUPANCIES.	
		7.5. IS NOT OPEN TO A CORRIDOR ON NONSPRINKLERED FLOORS IN ANY OCCUPANCY. 7.6. IS SEPARATED FROM FLOOR OPENINGS AND AIR	
		TRANSFER OPENINGS SERVING OTHER FLOORS BY CONSTRUCTION CONFORMING TO REQUIRED SHAFT ENCLOSURES.	
		7.7. IS LIMITED TO THE SAME SMOKE COMPARTMENT.	
DOOR FIRE RATING	DOORS IN A 1 HOUR FIRE BARRIER SHALL H	HAVE A 45 MINUTE RATING	IBC TABLE 715
	DOORS IN A 1 HOUR SHAFT OR EXIT ENCLO DOORS IN A 2 HOUR FIRE RATED STAIRWAY DOORS SERVING AN ELEVATOR MACHINE R	SHALL HAVE A 90 MINUTE RATING	IBC TABLE 718 IBC TABLE 718
WINDOW FIRE RATING	WINDOWS IN 1-HOUR SMOKE BARRIERS AN	D FIRE PARTITIONS TO PROVIDE 45 MINUTE FIRE WINDOWS WHERE WINDOWS ARE WITHIN 10 FT OF	
	STAIRWAYS, PROTECTION OF OPENINGS RI		
GLASS / GLAZING	GLASS IN HAZARDOUS LOCATIONS AS NOTI	ED IN IBC 2406.3 SHALL BE SAFETY GLAZING	IBC 2406
SEALING OF PENETRATIONS	REQUIRED BY IBC SECTION 712.	OF FIRE RESISTANCE ASSEMBLIES TO BE FIRE STOPPED AS	IBC 7
		IZONTAL ASSEMBLIES, PENETRATIONS OF HORIZONTAL ESISTANCE RATING SHALL MEET THE REQUIREMENTS OF TIONS 712.4.2.1 THROUGH 712.4.2.2.	
	CONNECT NOT MORE THAN THREE STORIES	ITEMS. NONCOMBUSTIBLE PENETRATING ITEMS THAT S ARE PERMITTED PROVIDED THAT THE ANNULAR SPACE IS	
	FILLED WITH AN APPROVED NONCOMBUSTI AND THE PRODUCTS OF COMBUSTION.	BLE MATERIAL TO RESIST THE FREE PASSAGE OF FLAME	
		NG ITEMS THAT CONNECT NOT MORE THAN TWO STORIES ULAR SPACE IS FILLED WITH AN APPROVED MATERIAL TO 1 THE PRODUCTS OF COMBUSTION.	
ICNITION DREVENTION	FIRE SMOKE DAMPERS SHALL BE PROVIDE	D PER IBC 712	
IGNITION PREVENTION POTENTIAL IGNITION SOURCES	NONE		
HAZARDOUS LOCATIONS	NONE		
FUEL CONTROL			
ALLOWABLE COMBUSTIBLE MATERIAL	ALLOWS USE OF COMBUSTIBLE MATERIALS LIST (22 CONDITIONS/ITEMS AS NOTED) OF	STIBLE CONSTRUCTION. IN A FEW CASES IBC SECTION 603.1 I. PLEASE REFER TO SECTION 603.1 FOR A COMPREHENSIVE PERMITTED COMBUSTIBLE MATERIALS. 603.1 ALLOWABLE ALL BE PERMITTED IN BUILDINGS OF TYPE I OR II	IBC 603
		INCLUDING THE FOLLOWING IN ACCORDANCE WITH	
	FIRE-RETARDANT-TREATED WOOD SHALL NONREARING PARTITIONS WHERE REO	L BE PERMITTED IN: UIRED FIRE-RESISTANCE RATING IS 2 HOURS OR LESS.	
	1.2. NONBEARING EXTERIOR WALLS WHERE	E NO FIRE RATING IS REQUIRED.	
FINISH MATERIALS	1.3. ROOF CONSTRUCTION, INCLUDING GIRL FINISH MATERIALS IN EXIT ACCESS CORRID	DERS, TRUSSES, FRAMING AND DECKING. DORS, ROOMS AND ENCLOSED SPACES IN SPRINKLER	
	TYPE B.	ROUP B OCCUPANCY. STAIRWAY ENCLOSURES SHALL BE EILING FINISHES SHALL BE CLASSIFIED IN ACCORDANCE WITH	
	ACCORDANCE WITH THEIR FLAME SPREAD CLASS A: FLAME SPREAD 0-25; SMOKE-DEV	ELOPED 0-450.	
	CLASS B: FLAME SPREAD 26-75; SMOKE-DE' CLASS C: FLAME SPREAD 76-200; SMOKE-DE EXCEPTION: MATERIALS, OTHER THAN TEX' 803.2. INTERIOR WALL OR CEILING FINISHES	EVELOPED 0-450. TILES, TESTED IN ACCORDANCE WITH SECTION 803.2.	
	803.4 APPLICATION. WHERE THESE MATERI. ELEMENTS REQUIRED TO HAVE A FIRE-RES CONSTRUCTION, THEY SHALL COMPLY WIT	ALS ARE APPLIED ON WALLS, CEILINGS OR STRUCTURAL ISTANCE RATING OR TO BE OF NONCOMBUSTIBLE H THE PROVISIONS OF THIS SECTION.	
	RESISTANCE-RATED OR NONCOMBUSTIBLE	CONSTRUCTION. ED BY ANY PROVISION IN THIS CODE TO BE OF FIRE- CONSTRUCTION, THE INTERIOR FINISH MATERIAL SHALL BE RUCTION OR TO FURRING STRIPS NOT EXCEEDING 1.75	
	INCHES APPLIED DIRECTLY AGAINST SUCH		
		H FURRING STRIPS SHALL BE FILLED WITH INORGANIC OR CKED AT A MAXIMUM OF 8 FEET IN ANY DIRECTION IN	
	803.4.2 SET-OUT CONSTRUCTION. WHERE V RESISTANCE-RATED OR NONCOMBUSTIBLE	VALLS AND CEILINGS ARE REQUIRED TO BE OF FIRE- CONSTRUCTION AND WALLS ARE SET OUT OR CEILINGS ARE	
	BE USED EXCEPT WHERE INTERIOR FINISH AUTOMATIC SPRINKLER SYSTEM OR ATTAC	CIFIED IN SECTION 803.4.1, CLASS A FINISH MATERIALS SHALL MATERIALS ARE PROTECTED ON BOTH SIDES BY AN SHED TO NONCOMBUSTIBLE BACKING OR FURRING STRIPS .1. THE HANGERS AND ASSEMBLY MEMBERS OF SUCH	
	DROPPED CEILINGS THAT ARE BELOW THE MATERIALS, EXCEPT THAT IN TYPE III AND VBE PERMITTED.	MAIN CEILING LINE SHALL BE OF NONCOMBUSTIBLE / CONSTRUCTION, FIRE-RETARDANT-TREATED WOOD SHALL	
	AS REQUIRED ELSEWHERE IN THIS CODE.	ALL SHALL BE OF FIRE-RESISTANCE- RATED CONSTRUCTION	
FURNITURE	WITH THE REQUIREMENTS FOR A CLASS B	PICTURE SCREENS TO BE FLAME RESISTANT OR COMPLY INTERIOR FINISH	IFC 803.2
MEANS OF EGRESS OCCUPANT LOAD FACTOR			
	ACCESSORY STORAGE AREAS, MECHANICAL EQUIPMENT ROOMS ASSEMBLY WITHOUT FIXED SEATS;	300 GROSS 1:15 NET	TABLE 1004.1
	UNCONCENTRATED BUSINESS AREAS - OFFICES AND	100 GROSS	TABLE 1004.
	WORKROOMS EDUCATIONAL - VOCATIONAL ROOM (COMPUTER LAB)	50 NET	TABLE 1004.1
	LIBRARY READING ROOMS LIBRARY STACK AREA	50 NET 100 GROSS	TABLE 1004.1
TOTAL OCCUPANT LOAD	00.00015	SHOWN ON CODE STUDY O 100	
BASEMEN LEVEL ON	3 (1997) 34 (1997) (1993) (1993)	SHOWN ON CODE STUDY G-102 SHOWN ON CODE STUDY G-102	
LEVEL TW		SHOWN ON CODE STUDY G-102	
LEVEL THRE		SHOWN ON CODE STUDY G-102 SHOWN ON CODE STUDY G-102	
EGRESS WIDTH	0.2 INCHES PER OCC. FOR STAIRS		IBC TABLE 1008
	0.15 INCHES PER OCC. FOR OTHER EGRESS	COMPONENTS	IBC TABLE 1009
REQUIRED STAIR WIDTH		44" MIN PER 1009.1 3 TO BE CONSIDERED PART OF AN ACCESSIBLE MEANS OF	60" PROVIDE
	EGRESS AND SHALL INCORPORATE AN ARE NONE PROVIDED, ROOF SURFACE IS STEEF PER 1009.11.1 EXCEPTION	A OF REFUGE PER THAN 4 UNITS IN 12, A ROOF HATCH WILL BE PROVIDED	IBC 1009.
ROOF ACCESS		44" MIN PER 1005.1	66" PROVIDI
· · · · · · · · · · · · · · · · · · ·	187 OCC X .15 IN PER OCC = 29 IN	44 IVIIN PER 1005.1	OO PROVIDI
REQUIRED CORRIDOR WIDTH NUMBER OF EXITS FROM ROOM	187 OCC X .15 IN PER OCC = 28 IN 1 REQUIRED IF OCC LOAD < 50 IN OCCUPAN	ANN AND 1775 FOR FEMORE AND STATES	
REQUIRED CORRIDOR WIDTH NUMBER OF EXITS FROM ROOM	1 REQUIRED IF OCC LOAD < 50 IN OCCUPAN 2 REQUIRED IF OCC LOAD > 50 IN OCCUPAN	NCIES A AND B	IBC TABLE 1016
REQUIRED CORRIDOR WIDTH	1 REQUIRED IF OCC LOAD < 50 IN OCCUPAN	ANN AND 1775 FOR FEMORE AND STATES	IBC TABLE 1016
REQUIRED CORRIDOR WIDTH NUMBER OF EXITS FROM ROOM	1 REQUIRED IF OCC LOAD < 50 IN OCCUPAN 2 REQUIRED IF OCC LOAD > 50 IN OCCUPAN	NCIES A AND B 2 PROVIDED PER FLOOR CUPANCY (150' ACTUAL)	IBC TABLE 1015 IBC TABLE 1015 IBC TABLE 1016

COMMON PATH OF EGRESS TRAVEL	"A" OCCUPANCY < 75 FEET	IBC 10
	"B" OCCUPANCY < 100 FEET WITH AUTOMATIC SPRINKLER SYSTEM WHERE A TENANT SPACE IN GROUP B HAS AN OCCUPANT LOAD < 30, COMMON PATH OF EGRESS TRAVEL < 100	IBC 1014.3 E IBC 1014.3 E
	IN ASSEMBLY SPACES, COMMON PATH OF EGRESS TRAVEL SHALL NOT EXCEED 30 FT FROM ANY SEAT TO A POINT WHERE AN OCCUPANT HAS A CHOICE OF TWO PATHS OF EGRESS TRAVEL TO TWO EXITS	IBC 10
EXIT THROUGH INTERVENING SPACES	EGRESS FROM A ROOM SHALL NOT PASS THROUGH ADJOINING OR INTERVENING ROOMS EXCEPT WHERE SUCH ROOMS OR AREAS ARE ACCESSORY TO THE AREA SERVED. EGRESS SHALL NOT PASS THROUGH KITCHENS, STORAGE ROOMS, OR CLOSETS	IBC 10
REQUIRED DOOR WIDTH	MINIMUM WIDTH OF THE DOOR SHALL BE SUFFICIENT FOR THE OCCUPANT LOAD THEREOF AND NOT LESS THAN 32" CLEAR WIDTH	IBC 10
DOOR SWING DIRECTION	DOORS SWING IN THE DIRECTION OF TRAVEL WHERE SERVING AN OCCUPANT LOAD > 50 OCCUPANTS	IBC 1008
ACCESSIBLE MEANS OF EGRESS	ACCESSIBLE SPACES SHALL BE PROVIDED WITH NOT LESS THAN ONE ACCESSIBLE MEANS OF EGRESS, WHERE MORE THAN ONE MEANS OF EGRESS IS REQUIRED BY SECTION 1015.1 OR 1019.1 FROM ANY	IBC 10
	ACCESSIBLE SPACE, EACH ACCESSIBLE PORTION OF THE SPACE SHALL BE SERVED BY NOT LESS THAN TWO ACCESSIBLE MEANS OF EGRESS	
AREA OF REFUGE EXIT DISCHARGE	NONE PROVIDED EXITS SHALL DISCHARGE DIRECTLY TO THE EXTERIOR, EX 1 ALLOWS A MAX OF 50% OF THE EXIT	IBC 1007.3 EX 1 2007 SUPPLEM
EATI DISCHARGE	ENCLOSURES TO EGRESS THROUGH AREAS ON THE LEVEL OF DISCHARGE PROVIDED ALL OF THE FOLLOWING ARE MET;	150 10
	1.1 SUCH EXIT ENCLOSURES EGRESS TO A FREE AND UNOBSTRUCTED WAY TO THE EXTERIOR OF THE BUILDING	
	1.2 THE ENTIRE AREA OF THE LEVEL OF DISCHARGE IS SEPARATED FROM AREAS BELOW BY CONSTRUCTION CONFORMING TO THE FIRE-RESISTANCE RATING FOR THE EXIT ENCLOSURE	
	1.3 EGRESS PATH AT LEVEL OF DISCHARGE IS PROTECTED THROUGHOUT BY AN APPROVED AUTOMATIC SPRINKLER SYSTEM	
EXIT SIGNS	PROVIDED IN COMPLIANCE WITH IBC 1011.1	IBC 1
EXIT ILLUMINATION	EXIT SIGN ILLUMINATION SHALL BE ILLUMINATED PER 1101.5. POWER SOURCE - EMERGENCY BATTERY BACK-UP	IBC 10°
MEANS OF EGRESS ILLUMINATION	MEANS OF EGRESS AND EXIT DISCHARGE SHALL BE ILLUMINATED AT ALL TIMES THE SPACE SERVED BY THE MEANS OF EGRESS IS OCCUPIED	IBC
SMOKE MANAGEMENT SYSTEMS		
SMOKE RESISTANCE REQUIREMENTS FOR CORRIDORS AND LOBBIES	CORRIDOR FIRE-RESISTANCE RATING IS 0 HR IN A AND B OCCUPANCIES WITH SPRINKLER SYSTEM	IBC TABLE 10
	SPACE BETWEEN CORRIDOR CEILING AND FLOOR / ROOF ABOVE CAN BE USED AS A RETURN AIR PLENUM IF THE CORRIDOR IS NOT REQUIRED TO BE OF FIRE-RESISTANCE RATED CONSTRUCTION	IBC 101
	SMOKE CONTROL IS NOT REQUIRED FOR ATRIUMS THAT ONLY CONNECT TWO STORIES	IBC 4
	ATRIUM SPACES SHALL BE SEPARATED FROM ADJACENT SPACES BY A ONE-HOUR FIRE BARRIER CONSTRUCTED IN ACCORDANCE WITH 706 OR HORIZONTAL ASSEMBLY CONSTRUCTED IN ACCORDANCE WITH 711, EXCEPTION 1 PERMITS A GLASS WALL FORMING A SMOKE PARTITION WITH AUTOMATIC	IBC 4
	SPRINKLERS SPACED 6' ALONG BOTH SIDES OF WALL OF A SINGLE SIDE OF THE WALL IF THERE IS NOT A WALKWAY ON THE ATRIUM SIDE.	
ACTIVE SMOKE EXTRACT REQUIREMENTS	STANDBY POWER SYSTEM PROVIDED FOR SMOKE EXHAUST SYSTEM	IBC 404.6 AND IBC 90
	INSPECTION AND TEST REQUIREMENTS OF SYSTEM WILL BE SUBMITTED IN ACCORDANCE WITH 909.3	IBC 9
	CFD MODELING TO BE PERFORMED DURING DESIGN DEVELOPMENT PHASE TO COMPLY WITH 909.4 THROUGH 909.9	IBC 9
	SMOKE CONTROL PANEL PROVIDED AT SOUTH VESTIBULE OF LEVEL ONE	IBC 90
LOCATIONS AND SEQUENCE OF OPERATIONS FOR ALL SMOKE A FIRE/SMOKE DAMPERS AND DUCT DETECTORS		
	FIRE DAMPERS, SMOKE DAMPERS, COMBINATION FIRE/SMOKE DAMPERS AND CEILING RADIATION DAMPERS SHALL BE PROVIDED AT FIRE WALLS, FIRE BARRIERS, FIRE PARTITIONS, CORRIDORS/SMOKE BARRIERS, AND SHAFT ENCLOSURES IN ACCORDANCE WITH IMC REQUIREMENTS.	IMC 6
	SMOKE AND COMBINATION FIRE/SMOKE DAMPERS SHALL CLOSE UPON ACTIVATION OF A LISTED SMOKE DETECTOR IN ACCORDANCE WITH THE IMC.	IMC 607.3
DETERMINE STAIR PRESSURIZATION REQUIREMENTS	BUILDING IS NOT A HIGH RISE BUILDING PER IBC 403 OR AN UNDERGROUND BUILDING PER IBC 405. SMOKE PROOF IS NOT REQUIRED	IBC 1020
HIGH RISE BUILDING REQUIREMENTS	SMOKE PROOF IS NOT REQUIRED NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS	IBC 4
	SMOKE PROOF IS NOT REQUIRED NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL	IBC 4
HIGH RISE BUILDING REQUIREMENTS BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS	SMOKE PROOF IS NOT REQUIRED NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500	IBC 10
HIGH RISE BUILDING REQUIREMENTS BASEMENT REQUIREMENTS	SMOKE PROOF IS NOT REQUIRED NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS	IBC 10
HIGH RISE BUILDING REQUIREMENTS BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS	SMOKE PROOF IS NOT REQUIRED NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 906.1 WHERE REQUIRED. PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING	IBC 10
HIGH RISE BUILDING REQUIREMENTS BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS	SMOKE PROOF IS NOT REQUIRED NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 906.1 WHERE REQUIRED. PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS. 1. IN ALL GROUP A, B, E, F, H, I, M, R-1, R-2, R-4 AND S OCCUPANCIES. EXCEPTIONS:	IBC 10
HIGH RISE BUILDING REQUIREMENTS BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS	SMOKE PROOF IS NOT REQUIRED NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 906.1 WHERE REQUIRED. PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS. 1. IN ALL GROUP A, B, E, F, H, I, M, R-1, R-2, R-4 AND S OCCUPANCIES. EXCEPTIONS: 1. IN ALL GROUP A, B AND E OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK- RESPONSE SPRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ONLY IN SPECIAL- HAZARD AREAS.	IBC 4
HIGH RISE BUILDING REQUIREMENTS BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS	NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 906.1 WHERE REQUIRED. PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS. 1. IN ALL GROUP A, B, E, F, H, I, M, R-1, R-2, R-4 AND S OCCUPANCIES. EXCEPTIONS: 1. IN ALL GROUP A, B AND E OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK- RESPONSE SPRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ONLY IN SPECIAL- HAZARD AREAS. 3. IN AREAS WHERE FLAMMABLE OR COMBUSTIBLE LIQUIDS ARE STORED, USED OR DISPENSED. 6. SPECIAL-HAZARD AREAS, INCLUDING BUT NOT LIMITED TO LABORATORIES, COMPUTER ROOMS AND	IBC TABLE 10 IBC TABLE 10 PROVIDED PER IFC SECTION 90
HIGH RISE BUILDING REQUIREMENTS BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS	NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 906.1 WHERE REQUIRED. PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS. 1. IN ALL GROUP A, B, E, F, H, I, M, R-1, R-2, R-4 AND S OCCUPANCIES. EXCEPTIONS: 1. IN ALL GROUP A, B AND E OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK- RESPONSE SPRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ONLY IN SPECIAL-HAZARD AREAS. 3. IN AREAS WHERE FLAMMABLE OR COMBUSTIBLE LIQUIDS ARE STORED, USED OR DISPENSED. 6. SPECIAL-HAZARD AREAS, INCLUDING BUT NOT LIMITED TO LABORATORIES, COMPUTER ROOMS AND GENERATOR ROOMS, WHERE REQUIRED BY THE FIRE CODE OFFICIAL.	IBC TABLE 10 PROVIDED PER IFC SECTION 90 IFC TABLE 9
HIGH RISE BUILDING REQUIREMENTS BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS PORTABLE FIRE EXTINGUISHERS	NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 906.1 WHERE REQUIRED. PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS. 1. IN ALL GROUP A, B, E, F, H, I, M, R-1, R-2, R-4 AND S OCCUPANCIES. EXCEPTIONS: 1. IN ALL GROUP A, B AND E OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK- RESPONSE SPRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ONLY IN SPECIAL- HAZARD AREAS. 3. IN AREAS WHERE FLAMMABLE OR COMBUSTIBLE LIQUIDS ARE STORED, USED OR DISPENSED. 6. SPECIAL-HAZARD AREAS, INCLUDING BUT NOT LIMITED TO LABORATORIES, COMPUTER ROOMS AND GENERATOR ROOMS, WHERE REQUIRED BY THE FIRE CODE OFFICIAL. (1) 2-A EXTINGUISHER WILL BE PROVIDED IN THE ABOVE LOCATIONS OR (1) PER 11,250 SQUARE FEET OR (1) PER 75 FEET	IBC 4 IBC TABLE 10 PROVIDED PER IFC SECTION 96 IFC TABLE 9
HIGH RISE BUILDING REQUIREMENTS BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS PORTABLE FIRE EXTINGUISHERS	SMOKE PROOF IS NOT REQUIRED NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 906.1 WHERE REQUIRED, PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS. 1. IN ALL GROUP A, B, E, F, H, I, M, R-1, R-2, R-4 AND S OCCUPANCIES. EXCEPTIONS: 1. IN ALL GROUP A, B AND E OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK- RESPONSE SPRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ONLY IN SPECIAL- HAZARD AREAS. 3. IN AREAS WHERE FLAMMABLE OR COMBUSTIBLE LIQUIDS ARE STORED, USED OR DISPENSED. 6. SPECIAL-HAZARD AREAS, INCLUDING BUT NOT LIMITED TO LABORATORIES, COMPUTER ROOMS AND GENERATOR ROOMS, WHERE REQUIRED BY THE FIRE CODE OFFICIAL. (1) 2-A EXTINGUISHER WILL BE PROVIDED IN THE ABOVE LOCATIONS OR (1) PER 11,250 SQUARE FEET OR (1) PER 75 FEET AN AUTOMATIC SPRINKLER SYSTEM SHALL BE PROVIDED FOR COMPLETE COVERAGE OF THE BUILDING. ALL VALVES CONTROLLING THE WATER SUPPLY FOR AUTOMATIC SPRINKLER SYSTEMS SHALL BE ELECTRICALLY SUPERVISED. FIRE SPRINKLER SYSTEM SHALL BE PRIMARILY WET-PIPE SYSTEM.	IBC TABLE 10 PROVIDED PER IFC SECTION 90 IFC TABLE 9 IBC 9
HIGH RISE BUILDING REQUIREMENTS BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS PORTABLE FIRE EXTINGUISHERS	SMOKE PROOF IS NOT REQUIRED NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 906.1 WHERE REQUIRED. PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS. 1. IN ALL GROUP A, B, E, F, H, I, M, R-1, R-2, R-4 AND S OCCUPANCIES. EXCEPTIONS: 1. IN ALL GROUP A, B AND E OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK- RESPONSE SPRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ONLY IN SPECIAL- HAZARD AREAS. 3. IN AREAS WHERE FLAMMABLE OR COMBUSTIBLE LIQUIDS ARE STORED, USED OR DISPENSED. 6. SPECIAL-HAZARD AREAS, INCLUDING BUT NOT LIMITED TO LABORATORIES, COMPUTER ROOMS AND GENERATOR ROOMS, WHERE REQUIRED BY THE FIRE CODE OFFICIAL. (1) 2-A EXTINGUISHER WILL BE PROVIDED IN THE ABOVE LOCATIONS OR (1) PER 11,250 SQUARE FEET OR (1) PER 75 FEET AN AUTOMATIC SPRINKLER SYSTEM SHALL BE PROVIDED FOR COMPLETE COVERAGE OF THE BUILDING. ALL VALVES CONTROLLING THE WATER SUPPLY FOR AUTOMATIC SPRINKLER SYSTEMS SHALL BE ELECTRICALLY SUPPRIVISED. FIRE SPRINKLER SYSTEM SHALL BE PRIMARILY WET-PIPE SYSTEM. LIGHT HAZARD OCCUPANCIES SHALL INCLUDE OFFICES AND RELATED SUPPORT AREAS. ORDINARY HAZARD OCCUPANCIES (GROUP 1) SHALL INCLUDE MECHANICAL ROOMS, ELECTRICAL	IBC TABLE 10 PROVIDED PER IFC SECTION 9 IFC TABLE 9 IBC 9 IBC 9 NFP
HIGH RISE BUILDING REQUIREMENTS BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS PORTABLE FIRE EXTINGUISHERS	SMOKE PROOF IS NOT REQUIRED NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 906.1 WHERE REQUIRED. PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS. 1. IN ALL GROUP A, B, E, F, H, I, M, R-1, R-2, R-4 AND S OCCUPANCIES. EXCEPTIONS: 1. IN ALL GROUP A, B AND E OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK- RESPONSE SPRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ONLY IN SPECIAL- HAZARD AREAS. 3. IN AREAS WHERE FLAMMABLE OR COMBUSTIBLE LIQUIDS ARE STORED, USED OR DISPENSED. 6. SPECIAL-HAZARD AREAS, INCLUDING BUT NOT LIMITED TO LABORATORIES, COMPUTER ROOMS AND GENERATOR ROOMS, WHERE REQUIRED BY THE FIRE CODE OFFICIAL. (1) 2-A EXTINGUISHER WILL BE PROVIDED IN THE ABOVE LOCATIONS OR (1) PER 11,250 SQUARE FEET OR (1) PER 75 FEET AN AUTOMATIC SPRINKLER SYSTEM SHALL BE PROVIDED FOR COMPLETE COVERAGE OF THE BUILDING. ALL VALVES CONTROLLING THE WATER SUPPLY FOR AUTOMATIC SPRINKLER SYSTEMS SHALL BE ELECTRICALLY SUPERVISED. FIRE SPRINKLER SYSTEM SHALL BE PRIMARILY WET-PIPE SYSTEM. LIGHT HAZARD OCCUPANCIES SHALL INCLUDE OFFICES AND RELATED SUPPORT AREAS.	IBC TABLE 10 PROVIDED PER IFC SECTION 9 IFC TABLE 9 IBC 9 IBC 9 NFPA 13 /
HIGH RISE BUILDING REQUIREMENTS BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS PORTABLE FIRE EXTINGUISHERS	SMOKE PROOF IS NOT REQUIRED NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 906.1 WHERE REQUIRED, PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS. 1. IN ALL GROUP A, B, E, F, H, I, M, R-1, R-2, R-4 AND S OCCUPANCIES. EXCEPTIONS: 1. IN ALL GROUP A, B AND E OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK- RESPONSE SPRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ONLY IN SPECIAL- HAZARD AREAS. 3. IN AREAS WHERE FLAMMABLE OR COMBUSTIBLE LIQUIDS ARE STORED, USED OR DISPENSED. 6. SPECIAL-HAZARD AREAS, INCLUDING BUT NOT LIMITED TO LABORATORIES, COMPUTER ROOMS AND GENERATOR ROOMS, WHERE REQUIRED BY THE FIRE CODE OFFICIAL. (1) 2-A EXTINGUISHER WILL BE PROVIDED IN THE ABOVE LOCATIONS OR (1) PER 11,250 SQUARE FEET OR (1) PER 75 FEET AN AUTOMATIC SPRINKLER SYSTEM SHALL BE PROVIDED FOR COMPLETE COVERAGE OF THE BUILDING. ALL VALVES CONTROLLING THE WATER SUPPLY FOR AUTOMATIC SPRINKLER SYSTEMS SHALL BE ELECTRICALLY SUPERVISED. FIRE SPRINKLER SYSTEM SHALL BE PRIMARILLY WET-PIPE SYSTEM. LIGHT HAZARD OCCUPANCIES SHALL INCLUDE OFFICES AND RELATED SUPPORT AREAS. ORDINARY HAZARD OCCUPANCIES (GROUP 1) SHALL INCLUDE MECHANICAL ROOMS, ELECTRICAL ROOMS, JANITOR CLOSETS, AND STORAGE ROOMS. ORDINARY HAZARD OCCUPANCIES (GROUP 2) SHALL INCLUDE LARGE STACK AREAS OF LIBRARIES. SIDEWALL SPRAY SPRINKLERS SHALL BE INSTALLED AT THE BOTTOM OF EACH ELEVATOR HOISTWAY, NOT MORE THAN TWO FEET ABOVE THE FLOOR OF THE PIT.	IBC 4 IBC TABLE 10 PROVIDED PER IFC SECTION 90 IFC TABLE 9 IBC 9 IBC 9 NFP NFPA 13 A NFPA 13 A.1
HIGH RISE BUILDING REQUIREMENTS BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS PORTABLE FIRE EXTINGUISHERS	SMOKE PROOF IS NOT REQUIRED NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 906.1 WHERE REQUIRED. PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS. 1. IN ALL GROUP A, B, E, F, H, I, M, R-1, R-2, R-4 AND S OCCUPANCIES. EXCEPTIONS: 1. IN ALL GROUP A, B AND E OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK- RESPONSE SPRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ONLY IN SPECIAL- HAZARD AREAS. 3. IN AREAS WHERE FLAMMABLE OR COMBUSTIBLE LIQUIDS ARE STORED, USED OR DISPENSED. 6. SPECIAL-HAZARD AREAS, INCLUDING BUT NOT LIMITED TO LABORATORIES, COMPUTER ROOMS AND GENERATOR ROOMS, WHERE REQUIRED BY THE FIRE CODE OFFICIAL. (1) 2-A EXTINGUISHER WILL BE PROVIDED IN THE ABOVE LOCATIONS OR (1) PER 11,250 SQUARE FEET OR (1) PER 75 FEET AN AUTOMATIC SPRINKLER SYSTEM SHALL BE PROVIDED FOR COMPLETE COVERAGE OF THE BUILDING. ALL VALVES CONTROLLING THE WATER SUPPLY FOR AUTOMATIC SPRINKLER SYSTEMS SHALL BE ELECTRICALLY SUPERVISED. FIRE SPRINKLER SYSTEM SHALL BE PRIMARILY WET-PIPE SYSTEM. LIGHT HAZARD OCCUPANCIES (GROUP 1) SHALL INCLUDE MECHANICAL ROOMS, ELECTRICAL ROOMS, JANITOR CLOSETS, AND STORAGE ROOMS. ORDINARY HAZARD OCCUPANCIES (GROUP 2) SHALL INCLUDE LARGE STACK AREAS OF LIBRARIES. SIDEWALL SPRAY SPRINKLERS SHALL BE INSTALLED AT THE BOTTOM OF EACH ELEVATOR HOISTWAY,	IBC 4 IBC TABLE 10 PROVIDED PER IFC SECTION 91 IFC TABLE 9 IBC 9 IBC 9 NFPA 13 A NFPA 13 A.1 NFPA 13 B.11
HIGH RISE BUILDING REQUIREMENTS BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS PORTABLE FIRE EXTINGUISHERS	MOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 906.1 WHERE REQUIRED. PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS. 1. IN ALL GROUP A, B, E, F, H, I, M, R-1, R-2, R-4 AND S OCCUPANCIES. EXCEPTIONS: 1. IN ALL GROUP A, B AND E OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK- RESPONSE SPRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ONLY IN SPECIAL-HAZARD AREAS. 3. IN AREAS WHERE FLAMMABLE OR COMBUSTIBLE LIQUIDS ARE STORED, USED OR DISPENSED. 6. SPECIAL-HAZARD AREAS, INCLUDING BUT NOT LIMITED TO LABORATORIES, COMPUTER ROOMS AND GENERATOR ROOMS, WHERE REQUIRED BY THE FIRE CODE OFFICIAL. (1) 2-A EXTINGUISHER WILL BE PROVIDED IN THE ABOVE LOCATIONS OR (1) PER 11,250 SQUARE FEET OR (1) PER 75 FEET AN AUTOMATIC SPRINKLER SYSTEM SHALL BE PROVIDED FOR COMPLETE COVERAGE OF THE BUILDING. ALL VALVES CONTROLLING THE WATER SUPPLY FOR AUTOMATIC SPRINKLER SYSTEMS SHALL BE ELECTRICALLY SUPERVISED. FIRE SPRINKLER SYSTEM SHALL BE PRIMARILY WET-PIPE SYSTEM. LIGHT HAZARD OCCUPANCIES (GROUP 1) SHALL INCLUDE MECHANICAL ROOMS, ELECTRICAL ROOMS, JANITOR CLOSETS, AND STORAGE ROOMS. ORDINARY HAZARD OCCUPANCIES (GROUP 2) SHALL INCLUDE LARGE STACK AREAS OF LIBRARIES. SIDEWALL SPRAY SPRINKLERS SHALL BE INSTALLED AT THE BOTTOM OF EACH ELEVATOR HOISTWAY, NOT MORE THAN TWO FEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLERS IN ELEVATOR MACHINE ROOMS OR AT THE TOPS OF HOISTWAYS SHALL BE OF ORDINARY OR INTERMEDIATE TEMPERATURE RATING. UPRICHT OR PENDANT SPRAY SPRINKLERS SHALL BE INSTALLED AT THE TOP OF ELEVATOR HOISTWAYS. SPRINKLERS REQUIRED AT THE TOP OF THE ELEVATOR HOISTWAY SHALL NOT BE REQUIRED WHERE	IBC 4 IBC TABLE 10 PROVIDED PER IFC SECTION 96 IFC TABLE 9 IBC 9 IBC 9 NFP NFPA 13 A.1 NFPA 13 A.1 NFPA 13 8.15 NFPA 13 8.15
HIGH RISE BUILDING REQUIREMENTS BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS PORTABLE FIRE EXTINGUISHERS	MOKE PROOF IS NOT REQUIRED NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 906.1 WHERE REQUIRED, PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS. 1. IN ALL GROUP A, B, E, F, H, I, M, R-1, R-2, R-4 AND S OCCUPANCIES. EXCEPTIONS: 1. IN ALL GROUP A, B AND E OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK-RESPONSE SPRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ONLY IN SPECIAL-HAZARD AREAS. 3. IN AREAS WHERE FLAMMABLE OR COMBUSTIBLE LIQUIDS ARE STORED, USED OR DISPENSED. 6. SPECIAL-HAZARD AREAS, INCLUDING BUT NOT LIMITED TO LABORATORIES, COMPUTER ROOMS AND GENERATOR ROOMS, WHERE REQUIRED BY THE FIRE CODE OFFICIAL. (1) 2-A EXTINGUISHER WILL BE PROVIDED IN THE ABOVE LOCATIONS OR (1) PER 11,250 SQUARE FEET OR (1) PER 75 FEET AN AUTOMATIC SPRINKLER SYSTEM SHALL BE PROVIDED FOR COMPLETE COVERAGE OF THE BUILDING. ALL VALVES CONTROLLING THE WATER SUPPLY FOR AUTOMATIC SPRINKLER SYSTEMS SHALL BE ELECTRICALLY SUPPERVISED. IGHT HAZARD OCCUPANCIES SHALL INCLUDE OFFICES AND RELATED SUPPORT AREAS. ORDINARY HAZARD OCCUPANCIES (GROUP 2) SHALL INCLUDE MECHANICAL ROOMS, ELECTRICAL ROOMS, JANITOR CLOSETS, AND STORAGE ROOMS. ORDINARY HAZARD OCCUPANCIES (GROUP 2) SHALL INCLUDE LARGE STACK AREAS OF LIBRARIES. SIDEWALL SPRINKLERS SHALL BE INSTALLED AT THE BOTTOM OF EACH ELEVATOR HOISTWAY, NOT MORE THAN TWO FEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLERS IN ELEVATOR MCHINE ROOMS OR AT THE TOPS OF HOISTWAYS SHALL BE OF ORDINARY OR INTERMEDIATE TEMPERATURE RATING. UPRIGHT OR PENDANT SPRAY SPRINKLERS SHALL BE INSTALLED AT THE BOTTOM OF EACH ELEVATOR HOISTWAY, NOT MORE THAN TWO FEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLERS IN ELEVATOR MCHINE ROOMS OR AT THE TOPS OF HOISTWAYS SHALL BE OF ORDINARY OR INTERMEDIATE TEMPERATURE RATING. UPRICH OR PENDANT SPRAY SPRINKLERS SHALL BE INSTALLED AT THE DOT OF PELEVATOR HOISTWAY. SHALL NOT BE REQUI	IBC TABLE 10 PROVIDED PER IFC SECTION 96 IFC TABLE 9 IBC 9 IBC 9 NFPA 13 A.1 NFPA 13 A.1 NFPA 13 8.11 NFPA 13 8.11 NFPA 13 8.11
HIGH RISE BUILDING REQUIREMENTS BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS PORTABLE FIRE EXTINGUISHERS	MOKE PROOF IS NOT REQUIRED NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL. OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 906.1 WHERE REQUIRED. PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS. 1. IN ALL GROUP A, B, E, F, H, I, M, R-1, R-2, R-4 AND S OCCUPANCIES. EXCEPTIONS: 1. IN ALL GROUP A, B AND E OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK- RESPONSE SPRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ONLY IN SPECIAL- HAZARD AREAS. 3. IN AREAS WHERE FLAMMABLE OR COMBUSTIBLE LIQUIDS ARE STORED, USED OR DISPENSED. 6. SPECIAL-HAZARD AREAS, INCLUDING BUT NOT LIMITED TO LABORATORIES, COMPUTER ROOMS AND GENERATOR ROOMS, WHERE REQUIRED BY THE FIRE CODE OFFICIAL. (1) 2.A EXTINGUISHER WILL BE PROVIDED IN THE ABOVE LOCATIONS OR (1) PER 11,250 SQUARE FEET OR (1) PER 75 FEET AN AUTOMATIC SPRINKLER SYSTEM SHALL BE PROVIDED FOR COMPLETE COVERAGE OF THE BUILDING. ALL VALVES CONTROLLING THE WATER SUPPLY FOR AUTOMATIC SPRINKLER SYSTEMS SHALL BE ELECTRICALLY SUPPERVISED. FIRE SPRINKLER SYSTEM SHALL BE PRIMARILLY WET-PIPE SYSTEM. LIGHT HAZARD OCCUPANCIES (GROUP 1) SHALL INCLUDE MECHANICAL ROOMS, ELECTRICAL ROOMS, JANITOR CLOSETS, AND STORAGE ROOMS. ORDINARY HAZARD OCCUPANCIES (GROUP 2) SHALL INCLUDE LARGE STACK AREAS OF LIBRARIES. SIDEWALL SPRAY SPRINKLERS SHALL BE INSTALLED AT THE BOTTOM OF EACH ELEVATOR HOISTWAY, NOT MORE THAN TWO FEET ABOVE THE FLOOR OF THE PIPE. AUTOMATIC SPRINKLERS IN ELEVATOR MACHINE ROOMS OR AT THE TOPS OF HOISTWAYS SHALL BE OF ORDINARY OR INTERMEDIATE TEMPERATURE RATING. UPRIGHT OR PENDANT SPRAY SPRINKLERS SHALL BE INSTALLED AT THE TOPS OF HOISTWAYS SHALL BE OF ORDINARY OR INTERMEDIATE TEMPERATURE RATING. UPRIGHT OR PENDANT SPRAY SPRINKLERS SHALL BE INSTALLED AT THE TOP OF ELEVATOR HOISTWAYS. SPRINKLERS REQUIRED AT THE TOP OF THE ELEVATOR HOISTWAY SHALL NOT BE REQUIRED WHERE THE HOISTWAY SOR DASSENGER ELEVATORS IS NONCOMBUSTIBLE AND THE CAR ENCLOSURE MAT	IBC TABLE 10 PROVIDED PER IFC SECTION 9 IFC TABLE 9 IBC 9 IBC 9 IBC 9 NFPA 13 A.1 NFPA 13 A.1 NFPA 13 8.1 NFPA 13 8.1 NFPA 13 8.1
HIGH RISE BUILDING REQUIREMENTS BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS PORTABLE FIRE EXTINGUISHERS	MOKE PROOF IS NOT REQUIRED NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 906.1 WHERE REQUIRED, PORTABLE FIRE EXTINIOUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS. 1. IN ALL GROUP A, B, E, F, H, I, M, R-1, R-2, R-4 AND S OCCUPANCIES. EXCEPTIONS: 1. IN ALL GROUP A, B AND E OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK- RESPONSE SPRINKLERS, FIRE EXTINIOUISHERS SHALL BE REQUIRED ONLY IN SPECIAL- HAZARD AREAS. 3. IN AREAS WHERE FLAMMABLE OR COMBUSTIBLE LIQUIDS ARE STORED, USED OR DISPENSED. 6. SPECIAL-HAZARD AREAS, INCLUDING BUT NOT LIMITED TO LABORATORIES, COMPUTER ROOMS AND GENERATOR ROOMS, WHERE REQUIRED BY THE FIRE CODE OFFICIAL. (1) 2-A EXTINIOUISHER WILL BE PROVIDED IN THE ABOVE LOCATIONS OR (1) PER 11.250 SQUARE FEET OR (1) PER 75 FEET AN AUTOMATIC SPRINKLER SYSTEM SHALL BE PROVIDED FOR COMPLETE COVERAGE OF THE BUILDING. ALL VALVES CONTROLLING THE WATER SUPPLY FOR AUTOMATIC SPRINKLER SYSTEMS SHALL BE ELECTRICALLY SUPERVISED. FIRE SPRINKLER SYSTEM SHALL BE PRIMARILY WET-PIPE SYSTEM. LIGHT HAZARD OCCUPANCIES (GROUP 1) SHALL INCLUDE MECHANICAL ROOMS, ELECTRICAL ROOMS, JANITOR COUPANCIES (GROUP 2) SHALL INCLUDE LARGE STACK AREAS OF LIBRARIES. ORDINARY HAZARD OCCUPANCIES (GROUP 2) SHALL INCLUDE LARGE STACK AREAS OF LIBRARIES. SIDEWALL SPRAY SPRINKLERS SHALL BE INSTALLED AT THE BOTTOM OF EACH ELEVATOR HOISTWAY, NOT MORE THAN TWO FEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLERS IN ELEVATOR MACHINE ROOMS OR AT THE TOPS OF HOISTWAYS SHALL BE OF ORDINARY OR INTERMEDIATE TEMPERATURE RATING. UPRIGHT OR PENDANT SPRAY SPRINKLERS SHALL BE INSTALLED AT THE BOTTOM OF EACH ELEVATOR HOISTWAY, NOT MORE THAN TWO FEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLERS IN ELEVATOR MACHINE ROOMS OR AT THE TOPS OF HOISTWAYS SHALL BE OF ORDINARY OR INTERMEDIATE TEMPERATURE RATING. UPRIGHT OR PENDANT SPRAY SPRINKLERS SHALL BE INSTALLED AT THE TOP OF FLEVATO	IBC TABLE 10 PROVIDED PER IFC SECTION 9 IFC TABLE 9 IBC 9 IBC 9 IBC 9 NFPA 13 A. NFPA 13 A.1 NFPA 13 8.1 NFPA 13 8.1 NFPA 13 8.1 NFPA 13 8.1
BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS PORTABLE FIRE EXTINGUISHERS AUTOMATIC SPRINKLER REQUIREMENTS	NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 906.1 WHERE REQUIRED. PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS. 1. IN ALL GROUP A, B, E, F, H, I, M, R-1, R-2, R-4 AND S OCCUPANCIES. EXCEPTIONS: 1. IN ALL GROUP A, B AND E OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK- RESPONSE SPRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ONLY IN SPECIAL- HAZARD AREAS. 3. IN AREAS WHERE FLAMMABLE OR COMBUSTIBLE LIQUIDS ARE STORED, USED OR DISPENSED. 6. SPECIAL-HAZARD AREAS, INCLUDING BUT NOT LIMITED TO LABORATORIES, COMPUTER ROOMS AND GENERATOR ROOMS, WHERE REQUIRED BY THE FIRE CODE OFFICIAL. (1) 2-A EXTINGUISHER WILL BE PROVIDED IN THE ABOVE LOCATIONS OR (1) PER 11,250 SQUARE FEET OR (1) PER 75 FEET AN AUTOMATIC SPRINKLER SYSTEM SHALL BE PROVIDED FOR COMPLETE COVERAGE OF THE BUILDING. ALL VALVES CONTROLLING THE WATER SUPPLY FOR AUTOMATIC SPRINKLER SYSTEMS SHALL BE ELECTRICALLY SUPPERVISED. FIRE SPRINKLER SYSTEM SHALL BE PRIMARILY WET-PIPE SYSTEM. LIGHT HAZARD OCCUPANCIES (GROUP 1) SHALL INCLUDE MECHANICAL ROOMS, LECTRICAL ROOMS, JANITOR CLOSSETS, AND STORAGE ROOMS. ORDINARY HAZARD OCCUPANCIES (GROUP 2) SHALL INCLUDE MECHANICAL ROOMS, ELECTRICAL ROOMS, JANITOR CLOSSETS, AND STORAGE ROOMS. ORDINARY HAZARD OCCUPANCIES (GROUP 2) SHALL INCLUDE LARGE STACK AREAS OF LIBRARIES. SIDEWALL SPRAY SPRINKLERS SHALL BE INSTALLED AT THE BOTTOM OF EACH ELEVATOR HOISTWAY, NOT MORE THAN TWO FEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKERS IN ELEVATOR MACHINE ROOMS OR AT THE TOPS OF HOISTWAYS SHALL BE OF ORDINARY OR PENDANT SPRAY SPRINKLERS SHALL BE INSTALLED AT THE TOP OF ELEVATOR HOSTWAYS. SPRINKLERS REQUIRED AT THE TOP OF THE ELEVATOR HOISTWAY SHALL NOT BE REQUIRED WHERE THE HOISTWAY FOR PASSENDER ELEVATORS IS NONCOMBUSTIBLE AND THE CAR ENCLOSURE MATERIALS MEET THE REQUIRED ATTHE THAN BEFET APART AND PLACED 6-12 INCHES FROM THE DARFT	IBC TABLE 10 PROVIDED PER IFC SECTION 9 IFC TABLE 9 IBC
HIGH RISE BUILDING REQUIREMENTS BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS PORTABLE FIRE EXTINGUISHERS	NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 906.1 WHERE REQUIRED, PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS. 1. IN ALL GROUP A, B, E, F, H, I, M, R-1, R-2, R-4 AND S OCCUPANCIES. EXCEPTIONS: 1. IN ALL GROUP A, B AND E OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK. RESPONSE SPRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ONLY IN SPECIAL-HAZARD AREAS. 3. IN AREAS WHERE FLAMMABLE OR COMBUSTIBLE LIQUIDS ARE STORED, USED OR DISPENSED. 6. SPECIAL-HAZARD AREAS, INCLUDING BUT NOT LIMITED TO LABORATORIES, COMPUTER ROOMS AND GENERATOR ROOMS, WHERE REQUIRED BY THE FIRE CODE OFFICIAL. (1) 2-A EXTINGUISHER WILL BE PROVIDED IN THE ABOVE LOCATIONS OR (1) PER 11,250 SQUARE FEET OR (1) PER 75 FEET AN AUTOMATIC SPRINKLER SYSTEM SHALL BE PROVIDED FOR COMPLETE COVERAGE OF THE BUILDING. ALL VALVES CONTROLLING THE WATER SUPPLY FOR AUTOMATIC SPRINKLER SYSTEMS SHALL BE ELECTRICALLY SUPPERVISED. FIRE SPRINKLER SYSTEM SHALL BE PRIMARILY WET-PIPE SYSTEM. LIGHT HAZARD OCCUPANCIES (GROUP 1) SHALL INCLUDE MECHANICAL ROOMS, ELECTRICAL ROOMS, JANITOR CLOSETS, AND STORAGE ROOMS. ORDINARY HAZARD OCCUPANCIES (GROUP 1) SHALL INCLUDE MECHANICAL ROOMS, ELECTRICAL ROOMS, JANITOR CLOSETS, AND STORAGE ROOMS. ORDINARY HAZARD OCCUPANCIES (GROUP 2) SHALL INCLUDE LARGE STACK AREAS OF LIBRARIES. SIDEWALL SPRAY SPRINKLERS SHALL BE INSTALLED AT THE BOTTOM OF EACH ELEVATOR HOISTWAY, NOT MORE THAN TWO FEET ABOVE THE FLOOR OF THE BIT. AUTOMATIC SPRINKLERS IN ELEVATOR NACHINE ROOMS OR AT THE TOP OF FELEVATOR HOISTWAYS. SPRINKLERS REQUIRED AT THE TOP OF THE ELEVATOR HOISTWAY SHALL NOT BE REQUIRED WHERE THE HOISTWAY'S FOR PASSENGER ELEVATORS IS NONCOMBUSTIBLE AND THE CAP ENCLOSURE MATERIALS MEET THE REQUIREMENTS OF ASME AT7.1. DRAFT STOPS SHALL BE PROVIDED FOR VERTICAL OPENINGS AND SHALL BE LOVACOR MHERE THE HOISTWAYS OF THE LOWESTER LEVATORS IS NONCOMBUSTIBLE AN	IBC TABLE 10 PROVIDED PER IFC SECTION 9 IFC TABLE 9 IBC
BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS PORTABLE FIRE EXTINGUISHERS AUTOMATIC SPRINKLER REQUIREMENTS	SMOKE PROOF IS NOT REQUIRED NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 906.1 WHERE REQUIRED, PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS. 1, IN ALL GROUP A, B, E, F, H, I, M, R+1, R+2, R+4 AND S OCCUPANCIES. EXCEPTIONS: 1. IN ALL GROUP A, B AND E OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK- RESPONSE SPRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ONLY IN SPECIAL-HAZARD AREAS. 3. IN AREAS WHERE FLAMMABLE OR COMBUSTIBLE LIQUIDS ARE STORED, USED OR DISPENSED. 6. SPECIAL-HAZARD AREAS, INCLUDING BUT NOT LIMITED TO LABORATORIES, COMPUTER ROOMS AND GENERATOR ROOMS, WHERE REQUIRED BY THE FIRE CODE OFFICIAL. (1) 2-A EXTINGUISHER WILL BE PROVIDED IN THE ABOVE LOCATIONS OR (1) PER 11.250 SQUARE FEET OR (1) PER 75 FEET AN AUTOMATIC SPRINKLER SYSTEM SHALL BE PROVIDED FOR COMPLETE COVERAGE OF THE BUILDING. ALL VALVES CONTROLLING THE WATER SUPPLY FOR AUTOMATIC SPRINKLER SYSTEMS SHALL BE ELECTRICALLY SUPPERVISED. FIRE SPRINKLER SYSTEM SHALL BE PRIMARILY WET-PIPE SYSTEM. LIGHT HAZARD OCCUPANCIES (BROUP 1) SHALL INCLUDE MECHANICAL ROOMS, ELECTRICAL ROOMS, JANITOR CLOSETS, AND STORAGE ROOMS. ORDINARY HAZARD OCCUPANCIES (GROUP 2) SHALL INCLUDE MECHANICAL ROOMS, ELECTRICAL ROOMS, JANITOR CLOSETS, AND STORAGE ROOMS. ORDINARY HAZARD OCCUPANCIES (GROUP 2) SHALL INCLUDE MECHANICAL ROOMS, ELECTRICAL PROMISE SPRINKLERS SHALL BE INSTALLED AT THE BOTTOM OF EACH ELEVATOR HOISTWAY, NOT MORE THAN TWO FEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLERS DE LECHATOR SOOR AND STORAGE STORY BE CONTROLLED AT THE TOP OF FLEVATOR HOISTWAY. NOT MORE THAN TWO FEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLERS SHALL BE INSTALLED AT THE TOP OF HOISTWAYS SHALL BE OF ORDINARY OR INTERMEDIATE TEMPERATURE RATING. SPRINKLERS SHALL BE REQUIRED AND THE ELEVATOR HOISTWAY SHALL BE DOED FROM THE PROMISE OF AND CONSTRUCTED OF PRODUCTED FROM THE FORM OF THE HID	IBC TABLE 10 PROVIDED PER IFC SECTION 9 IFC TABLE 9 IBC 9 IBC 9 IBC 9 IBC 9 IBC 9 IBC 90 IBC 10 IBC
BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS PORTABLE FIRE EXTINGUISHERS AUTOMATIC SPRINKLER REQUIREMENTS	SMOKE PROOF IS NOT REQUIRED NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENTA ACCORD OF RIFE DEPARTMENTA ACCORD AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 590 906.1 WHERE REQUIRED, PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS, 1, IN ALL GROUP A, B, E, F, H, 1, M, R-1, R-2, R-4 AND S OCCUPANCIES. EXCEPTIONS: 1. IN ALL GROUP A, B AND E OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK, RESPONSE SPRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ONLY IN SPECIAL—HAZARD AREAS. 3. IN AREAS WHERE FLAMMABLE OR COMBUSTIBLE LIQUIDS ARE STORED, USED OR DISPENSED. 6. SPECIAL-HAZARD AREAS, INCLUDING BUT NOT LIMITED TO LABORATORIES, COMPUTER ROOMS AND GENERATOR ROOMS, WHERE REQUIRED BY THE FIRE CODE OFFICIAL. (1) 2-A EXTINGUISHER WILL BE PROVIDED IN THE ABOVE LOCATIONS OR (1) PER 11.250 SQUARE FEET OR (1) PER 75 FEET AN AUTOMATIC SPRINKLER SYSTEM SHALL BE PROVIDED FOR COMPLETE COVERAGE OF THE BUILDING. ALL VALVES CONTROLLING THE WATER SUPPLY FOR AUTOMATIC SPRINKLER SYSTEMS SHALL BE ELECTRICALLY SUPERVISED. FIRE SPRINKLER SYSTEM SHALL BE PRIMARILY WET-PIPE SYSTEM. LIGHT HAZARD OCCUPANCIES (GROUP 1) SHALL INCLUDE MECHANICAL ROOMS, LECTRICAL ROOMS, JANITOR CLOSETS, AND STORAGE ROOMS. SIDEWALL SPRAY SPRINKLERS SHALL BE INSTALLED AT THE BOTTOM OF EACH ELEVATOR HOISTWAY, NOT MORE THAN TWO FEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLERS IN ELEVATOR MADINER ROOMS OR AT THE TOP OF ELEVATOR HOISTWAY, NOT MORE THAN TWO FEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLESS IN ELEVATOR MORNINGR ROOMS OR AT THE TOP OF ELEVATOR HOISTWAY, NOT MORE THAN TWO FEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLESS IN ELEVATOR MORNINGR ROOMS OR AT THE TOP OF ELEVATOR HOISTWAY, NOT MORE THAN TWO FEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLESS IN ELEVATOR MORNINGR ROOMS OR AT THE TOP OF ELEVATOR HOISTWAY, NOT MORE THAN TO PEED ATT TO THE OPENING, AT LEAST 18 INCHES DEPARTMENT SHALL BE DOCATED IN MEE	IBC TABLE 10 PROVIDED PER IFC SECTION 9 IFC TABLE 9 IBC 9 IBC 9 IBC 9 IBC 9 IBC 9 IBC 90 IBC 10 IBC
BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS PORTABLE FIRE EXTINGUISHERS AUTOMATIC SPRINKLER REQUIREMENTS	SMOKE PROOF IS NOT REQUIRED NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS. ALTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 906.1 WHERE REQUIRED, PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS. 1. IN ALL GROUP A. B. E. F. H. I. M. R-1, R-2, R-4 AND S OCCUPANCIES. EXCEPTIONS: 1. IN ALL GROUP A. B. AND E OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK. RESPONSE SPRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ONLY IN SPECIAL. HAZARD AREAS. 3. IN AREAS WHERE FLAMMABLE OR COMBUSTIBLE LIQUIDS ARE STORED, USED OR DISPENSED. 6. SPECIAL-HAZARD AREAS, INCLIDING BUT NOT LIMITED TO LABORATORIES, COMPUTER ROOMS AND GENERATOR ROOMS, WHERE REQUIRED BY THE FIRE CODE OFFICIAL. (1) 2.A EXTINGUISHER WILL BE PROVIDED IN THE ABOVE LOCATIONS OR (1) PER 11.250 SQUARE FEET OR (1) PER 75 FEET AN AUTOMATIC SPRINKLER SYSTEM SHALL BE PROVIDED FOR COMPLETE COVERAGE OF THE BUILDING. ALL VALVES CONTROLLING THE WATER SUPPLY FOR AUTOMATIC SPRINKLER SYSTEMS SHALL BE ELECTRICALLY SUPERVISED. FIRE SPRINKLER SYSTEM SHALL BE FRIMARILLY WETPIPE SYSTEM. LIGHT HAZARD OCCUPANCIES (GROUP 1) SHALL INCLUDE MECHANICAL ROOMS, ELECTRICAL ROOMS, ENTRY AND FET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLERS SHALL BE RINSTALLED AT THE BOTTOM OF EACH ELEVATOR HOISTWAY, NOT MORE THAN TWO FET ABOVE THE FLOOR OF THE PIT. AUTOMATO REPRODAT SERVEY SHALL BE ENSTALLED AT THE BOTTOM OF EACH ELEVATOR HOISTWAY, NOT MORE THAN TWO FET ABOVE THE FLOOR OF THE PIT. AUTOMATO SPRINKLERS IN ELEVATOR MICHIER ROOMS OR AT THE TOPS OF HOISTWAYS SHALL BE OF ORDINARY OR INTERMEDIATE THE PROTUDE OF OF PITE PITE. AUTOMATO OF PENDANT SERVEY SPRINKLERS SHALL BE INSTALLED AT T	IBC TABLE 10 PROVIDED PER IFC SECTION 99 IFC TABLE 9 IBC 90 IBC 90
BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS PORTABLE FIRE EXTINGUISHERS AUTOMATIC SPRINKLER REQUIREMENTS	SMOKE PROOF IS NOT REQUIRED NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS. AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 906.1 WHERE REQUIRED, PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS. I. IN ALL GROUP A. B. E. F. H. I. M. R-1, R-2, R-4 AND S OCCUPANCIES. EXCEPTIONS: 1. IN ALL GROUP A. B. AD BE OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK. RESPONSE SPRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ONLY IN SPECIAL. HAZARD AREAS, SPRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ONLY IN SPECIAL. HAZARD AREAS. 3. IN AREAS WHERE FLAMMABLE OR COMBUSTIBLE LIQUIDS ARE STORED, USED OR DISPENSED. 6. SPECIAL-MAZARD AREAS, INCLUDING BUT NOT LIMITED TO LABORATORIES, COMPUTER ROOMS AND GENERATOR ROOMS, WHERE REQUIRED BY THE FIRE CODE OFFICIAL. (1) 2-A EXTINGUISHER WILL BE PROVIDED IN THE ABOVE LOCATIONS OR (1) PER 11,250 SQUARE FEET OR (1) PER 75 FEET AN AUTOMATIC SPRINKLER SYSTEM SHALL BE PROVIDED FOR COMPLETE COVERAGE OF THE BUILDING. ALL VALVES CONTROLLING THE WATER SUPPLY FOR AUTOMATIC SPRINKLER SYSTEMS SHALL BE ELECTRICALLY SUPERVISED. FIRE SPRINKLER SYSTEM SHALL BE PRIMARILLY WET-PIPE SYSTEM. LIGHT HAZARD OCCUPANCIES SHALL INCLUDE OFFICES AND RELATED SUPPORT AREAS. ORDINARY HAZARD OCCUPANCIES (GROUP 2) SHALL INCLUDE LARGE STACK AREAS OF LIBRARIES. SIDEWALL SPRAY SPRINKLERS SHALL BE INSTALLED AT THE BOTTOM OF EACH ELEVATOR HOISTWAY, NOT MORE THAN TWO FEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLER SHALL BE INSTALLED AT THE BOTTOM OF EACH ELEVATOR HOISTWAY, NOT MORE THAN TWO FEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLERS SHALL BE INSTALLED AT THE TOP OF HELEVATOR HOISTWAY. NOT MORE THAN TWO FEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLERS SHALL BE INSTALLED BY THE BOTTOM OF EACH ELEVATOR HOISTWAY. NOT MORE THAN TWO FEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLERS SHALL BE INSTALLED BY THE FORD OF THE COVER OF HOR OF THE PIT. AUTOMATIC SPRINK	IBC TABLE 10 PROVIDED PER IFC SECTION 90 IFC TABLE 9 IBC 9 IBC 9 NFPA 13 A.1 NFPA 13 A.1 NFPA 13 8.11 NFPA 13 8.11 NFPA 13 8.15
BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS PORTABLE FIRE EXTINGUISHERS AUTOMATIC SPRINKLER REQUIREMENTS	SMOKE PROOF IS NOT REQUIRED NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS. AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 90.5 I WHERE REQUIRED, PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS. I. IN ALL GROUP A. B., E. F., H. J., M. RY, RY, RY, ARA AND S OCCUPANCIES. EXCEPTIONS. 1. IN ALL GROUP A. B. AND E OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK. RESPONSE SYRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ONLY IN SPECIAL. HAZARD AREAS. 3. IN AREAS WHERE FLAMMABLE OR COMBUSTIBLE LIQUIDS ARE STORED, USED OR DISPENSED. 6. SPECIAL-HAZARD AREAS, INCLUDING BUT NOT LIMITED TO LABORATORIES, COMPUTER ROOMS AND GENERATOR ROOMS, WHERE REQUIRED BY THE FIRE CODE OFFICIAL. (1) 2.A EXTINGUISHER WILL BE PROVIDED IN THE ABOVE LOCATIONS OR (1) PER 11,250 SQUARE FEET OR (1) PER 75 FEET AN AUTOMATIC SPRINKLER SYSTEM SHALL BE PROVIDED FOR COMPLETE COVERAGE OF THE BUILDING. ALL VALVES CONTROLLING THE WATER SUPPLY FOR AUTOMATIC SPRINKLER SYSTEMS SHALL BE ELECTRICALLY SUPERVISED. FIRE SPRINKLER SYSTEM SHALL BE PRIMARILY WET-PIPE SYSTEM. ORDINARY HAZARD OCCUPANCIES (GROUP 2) SHALL INCLIDE DEFORE AND RELATED SUPPORT AREAS. ORDINARY HAZARD OCCUPANCIES (GROUP 2) SHALL INCLIDE LARGE STACK AREAS OF LIBRARIES. SIDEWALL SPAY SYRHILGES SHALL BE INSTALLED AT THE BOTTOM OF EACH ELEVATOR HOISTWAY, NOT MORE THAN TWO FEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLER SYSTEMS SHALL BE INSTALLED AT THE TOP SO FHOISTWAYS SHALL BE OF ORDINARY HAZARD OCCUPANCIES (GROUP 2) SHALL INCLIDE LARGE STACK AREAS OF LIBRARIES. SIDEWALL SPAY SYRHILGESS SHALL BE INSTALLED AT THE FOOTOM OF EACH ELEVATOR HOISTWAY, NOT MORE THAN TWO FEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLERS REQUIRED ATT HE TOP OF THE ELEVATOR HOISTWAY SHALL BE OF ORDINARY OF REPROSEDED AND THE SIDE OF ORDINARY OF PART OF THE FLOOR OF THE PIT. AUTOMATIC SPRINKLERS AND THE AREA OF A SIME ATT. DARKS THAN TWO PEET ABOVE THE FLOOR CHEET O	IBC TABLE 10 PROVIDED PER IFC SECTION 99 IFC TABLE 9 IBC 9 IBC 9 IBC 9 IBC 9 IBC 13 8.11 IBC 13 8.11 IBC 13 8.11 IBC 14 8.11 IBC 90 IBC 90 IBC 9 IBC 9
BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS PORTABLE FIRE EXTINGUISHERS AUTOMATIC SPRINKLER REQUIREMENTS	SMOKE PROOF IS NOT REQUIRED NOT APPLICABLE BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 906 1 WHERE REQUIRED, PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS. 1. IN ALL GROUP A. B. E. F. H. I. M. R-1, R-2, R-4 AND S OCCUPANCIES. EXCEPTIONS. 1. IN ALL GROUP A. B. AND E OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK. RESPONSE SPRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ONLY IN SPECIAL-HAZARD AREAS. 3. IN AREAS WHERE FLAMMABLE OR COMBUSTIBLE LIQUIDS ARE STORED, USED OR DISPENSED. 6. SPECIAL-HAZARD AREAS, INCLUDING BUT NOT LIMITED TO LABORATORIES, COMPUTER ROOMS AND GENERATOR ROOMS, WHERE REQUIRED BY THE FIRE CODE OFFICIAL. (1) 2.A EXTINGUISHER WILL BE PROVIDED IN THE ABOVE LOCATIONS OR (1) PER 11,250 SQUARE FEET OR (1) PER 75 FEET AN AUTOMATIC SPRINKLER SYSTEM SHALL BE PROVIDED FOR COMPLETE COVERAGE OF THE BUILDING. ALL VALVES CONTROLLING THE WATER SUPPLY FOR AUTOMATIC SPRINKLER SYSTEMS SHALL BE ELECTRICALLY SUPERVISED. FIRE SPRINKLER SYSTEM SHALL BE PRIMARILLY WET-PIPE SYSTEM. LIGHT HAZARD OCCUPANCIES SHALL INCLUDE OFFICES AND RELATED SUPPORT AREAS. ORDINARY HAZARD OCCUPANCIES IGROUP 1) SHALL INCLUDE MECHANICAL ROOMS, ELECTRICAL ROOMS, JANITOR CLOSETS, AND STORAGE ROOMS. SIDEWALL SPRAY SPRINKLERS SHALL BE INSTALLED AT THE BOTTOM OF EACH ELEVATOR HOISTWAY, NOT MORE THAN TWO FEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLERS SHALL BE INSTALLED AT THE BOTTOM OF EACH ELEVATOR HOISTWAY, NOT MORE THAN TWO FEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLERS FARMLERS SHALL BE INSTALLED AT THE TOP SO FHOISTWAYS SHALL BE OF ORDINARY OR INTERMEDIATE TEMPERATURE RATING. UPURLY OF THE PROMATE SPRAY SPRINKLERS SHALL BE INSTALLED AT THE TOP SO FHOISTWAYS SHALL BE OF ORDINARY OR INTERMEDIATE THE PROVIDED FOR WERE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLERS REQUIRED AT THE TOP OF THE ELEVATOR HOISTWAY. NOT MORE THAN TWO FEET ABOVE THE FLOOR	IBC TABLE 10 PROVIDED PER IFC SECTION 90 IFC TABLE 9 IBC 9
BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS PORTABLE FIRE EXTINGUISHERS AUTOMATIC SPRINKLER REQUIREMENTS	NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 906.1 WHERE REQUIRED PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS. 1. IN ALL GROUP A, B., E. F., H. I. M., R.1, R.2, R.4 AND S OCCUPANCIES. EXCEPTIONS: 1. IN ALL GROUP A, B. AND E OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK: RESPONSE SPRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ONLY IN SPECIAL-HAZARD AREAS. 3. IN AREAS WHERE FLAMMABLE OF COMBUSTIBLE LIQUIDIS ARE STORED, USED OR DISPOSED. 6. SPECIAL-HAZARD AREAS, INCLUDING BUT NOT LIMITED TO LABORATORIES. COMPUTER ROOMS AND GENERATOR ROOMS. WHERE REQUIRED BY THE FIRE CODE OFFICIAL. (1) 2.A EXTINGUISHER WILL BE PROVIDED IN THE ABOVE LOCATIONS OR (1) PER 11.250 SQUARE FEET OR (1) PER 75 FEET AN AUTOMATIC SPRINKLER SYSTEM SHALL BE PROVIDED FOR COMPLETE COVERAGE OF THE BUILDING. ALL VALVES CONTROLLING THE WATER SUPPLY FOR AUTOMATIC SPRINKLER SYSTEMS SHALL BE ELECTRICALLY SUPERVISED. I. SHARD STRINKLER SYSTEM SHALL BE PROVIDED FOR COMPLETE COVERAGE OF THE BUILDING. ALL HAZARD OCCUPANCIES SHALL INCLUDE OFFICES AND RELATED SUPPORT AREAS. ORDINARY HAZARD OCCUPANCIES (GROUP 2) SHALL INCLUDE LARGE STACK AREAS OF LIBRARIES. SIDEWALL SPRAY SPRINKLE RES SHALL BE PROVIDED OF THE PIT. AUTOMATIC SPRINKLER SYSTEM SHALL BE PROVIDED OF THE PIT. AUTOMATIC SPRINKLER SYSTEM SHALL BE REVAILED OF THE PIT. AUTOMATIC SPRINKLER SHALL BE PROVIDED OF THE PIT. AUTOMATIC SPRINKLER SYSTEM SHALL BE NOTABLE FOR THE PIT. AUTOMATIC SPRINKLER SHALL BE PROVIDED OF THE PIT. AUTOMATIC SPRINKLER SHALL BE NOTABLE DAT THE DOTTOM OF EACH ELEVATOR HOISTWAY, NOT MORE THAN TWO PEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLER SHALL BE SHALL BE RECORD OF THE PIT. AUTOMATIC SPRINKLER SHALL BE SHALL BE RECOR	IBC 4 IBC TABLE 10 PROVIDED PER IFC SECTION 90 IBC 9
BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS PORTABLE FIRE EXTINGUISHERS AUTOMATIC SPRINKLER REQUIREMENTS	SMOKE PROOF IS NOT REQUIRED NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF SCRESS, OCCUPANT LOAD IS LESS THAN 500 SOS.1 WHERE REQUIRED, PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS 1, IN ALL GROUP A, B, E, F, H, I, M, R-1, R-2, R-4 AND S OCCUPANCIES. EXCEPTIONS: 1. IN ALL GROUP A, B AND E OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK. RESPONSE SPRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ON Y IN SPECIAL. HAZARO AREAS. 3. IN AREAS WHERE FLAMMABLE OF COMBUSTBLE LIQUIDS ARE STORED, USED ON DISPISSED. 6. SPECIAL-HAZARO AREAS, INCLUDING BUT NOT LIMITED TO LABORATORIES, COMPUTER ROOMS AND GENERATOR ROOMS, WHERE REQUIRED BY THE FIRE CODE OFFICIAL. (1) 2.A EXTINGUISHER WILL BE PROVIDED IN THE ABOVE LOCATIONS OR (1) PER 11,250 SQUARE FEET OR (1) FER 75 FEET ANA AUTOMATIC SPRINKLER SYSTEM SHALL BE PROVIDED FOR COMPLETE COVERAGE OF THE BUILDING. ALL VALVES CONTROLLING THE WATER SUPPLY FOR AUTOMATIC SPRINKLER SYSTEMS SHALL BE LIGHT HAZARO OCCUPANCIES (SROUP) 1, SHALL INCLIDE MECHANICAL ROOMS, LECTRICAL ROOMS, JANITOR CLOSETS, AND STORAGE ROOMS. ORDINARY HAZARO OCCUPANCIES (SROUP) 1, SHALL INCLIDE MECHANICAL ROOMS, ELECTRICAL ROOMS, JANITOR CLOSETS, AND STORAGE ROOMS. ORDINARY HAZARO OCCUPANCIES (SROUP) 1, SHALL INCLIDE AREA STACK AREAS OF LIBRARIES. SIDEMAL SPRAY SPRINKLERS SHALL BE RISTALLED AT THE BOTTOM OF EACH ELEVATOR HOISTWAY, NOT MOSE THAN TWO FEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLER SHALL BE SHALL BE INSTALLED AT THE BOTTOM OF EACH ELEVATOR HOISTWAY, NOT MOSE THAN TWO FEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLER SHALL BE SHALL BE INSTALLED AT THE BOTTOM OF EACH ELEVATOR HOISTWAY, NOT MOSE THAN TWO FEET ABOVE THE FLOOR OF THE PIT. AUTOMATIC SPRINKLER SHALL BE SHALL BE INSTALLED AT THE FORD OF HOISTWAYS SHALL BE OF ORDINARY HAZARO OCCUPANCIES (SROUP) 3 SHALL INCLIDE LEADED THE TOPS OF HOISTWAYS SHALL BE OF ORDINARY HAZARO TO COCUPANCI	IBC 1020 IBC 40 IBC TABLE 10 IBC TABLE 10 PROVIDED PER IFC SECTION 90 IBC 90 I
BASEMENT REQUIREMENTS FIRE SUPPRESSION SYSTEMS PORTABLE FIRE EXTINGUISHERS AUTOMATIC SPRINKLER REQUIREMENTS	INDIGENOR PROOF IS NOT REQUIRED NOT APPLICABLE, BUILDING DOES NOT HAVE AN OCCUPIED FLOOR MORE THAN 75 FEET ABOVE LEVEL OF FIRE DEPARTMENT ACCESS AUTOMATIC SPRINKLER PROVIDED AS WELL AS TWO MEANS OF EGRESS, OCCUPANT LOAD IS LESS THAN 500 500.1 WHERE REQUIRED, PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS, 1. IN ALL GROUP A, B, E, F, H, I, M, R-I, R-2, R-4 AND S OCCUPANCIES. EXCEPTIONS: 1. IN ALL GROUP A, B AND E OCCUPANCIES EQUIPPED THROUGHOUT WITH QUICK, RESPONSE SPRINKLERS, FIRE EXTINGUISHERS SHALL BE REQUIRED ONLY IN SPECIAL-HAZARD AREAS. 3. IN AREAS WHERE FLAMMABLE OR COMBUSTIBLE LIQUIDIS ARE STORED, USED OR RISPENSED. 6. SPECIAL-HAZARD AREAS, INCLUDING BUT NOT LIMITED TO LABORATORIES, COMPUTER ROOMS AND GENERATOR ROOMS, WHERE REQUIRED BY THE FIRE CODE OFFICIAL. (1) 2.A EXTINGUISHER WILL BE PROVIDED IN THE ABOVE LOCATIONS OR (1) PER 11,250 SQUARE FEET OR (1) PER 75 FEET AN AUTOMATIC SPRINKLER SYSTEM SHALL BE PROVIDED FOR COMPLETE COVERAGE OF THE BUILDING. ALL VALVES CONTROLLING THE WATER SUPPLY FOR AUTOMATIC SPRINKLER SYSTEMS SHALL BE ELECTRICALLY SUPERVISED. ILIGHT HAZARD OCCUPANCIES (GROUP 1) SHALL INCLUDE AREAS EAS OF LIBRARIES. ORDINARY HAZARD OCCUPANCIES (GROUP 2) SHALL INCLUDE LARGE STACK AREAS OF LIBRARIES. ORDINARY HAZARD OCCUPANCIES (GROUP 2) SHALL INCLUDE LARGE STACK AREAS OF LIBRARIES. SIDEWALL SPRAYS SPRINKLERS HALL BE INSTALLED AT THE TOP SO FHOISTWAYS SHALL BE OF ORDINARY HAZARD OCCUPANCIES (GROUP 2) SHALL INCLUDE LARGE STACK AREAS OF LIBRARIES. SIDEWALL SPRAYS SPRINKLERS HALL BE INSTALLED AT THE TOP SO FHOISTWAYS SHALL BE OF ORDINARY HAZARD OCCUPANCIES (GROUP 2) SHALL INCLUDE LARGE STACK AREAS OF LIBRARIES. SIDEWALL SPRAYS SPRINKLERS SHALL BE INSTALLED AT THE TOP SO FHOISTWAYS SHALL BE OF ORDINARY OR OR INTERMEDIATE THE PROOF OF THE PIT. AUTOMATIC SPRINKLERS IN ELEVATOR MOCHINE ROOMS OR AT THE TOP OF DISTINAYS SHALL BE OF ORDINARY OR OR INTERMEDIATE LAWORD FOR SHALL BE CONTED THE THE TOP OF THE ELEVATOR HOISTWAY. NOT MORE THEN HAVE SHALL BE CONTED FOR	IBC 4 IBC TABLE 10 PROVIDED PER IFC SECTION 90 IBC 9

	HYDRAULICALLY MOST REMOTE 2-1/2" HOSI HYDRAULICALLY MOST REMOTE 1-1/2" HOSI PRESSURE, A VARIANCE WILL BE REQUEST PRESSURE OF 100 PSI AT THE TOP OF THE	AL PRESSURE OF 100 PSI AT THE OUTLET OF THE E CONNECTION AND 65 PSI AT THE OUTLET OF THE E STATION. COMMENT: BASED ON AVAILABLE WATER FED FROM THE AHJ TO WAIVE THE REQUIRED MINIMUM STAND PIPE TO AVOID THE NEED FOR A FIRE PUMP. THE VIDE ADEQUATE PRESSURE TO ACTIVATE THE MOST REMOTE	
	FIRE DEPARTMENT CONNECTIONS PROVIDE ALONG 15TH STREET	ED AT BOTH NORTH AND SOUTH ENTRIES TO BUILDING	IFC 903.
FIRE DEPARTMENT ACCESS AND SUPPRESSION	SHOWN ON G-102		
FIRE DETECTION AND ALARM SYSTE	<u>vis</u>		
		GROUP A OR B OCCUPANCIES PROVIDED BUILDING IS ATIC SPRINKLER SYSTEM AND ALARM NOTIFICATION LER WATER FLOW	IBC 907.2.1 EX AND IBC 907.2.2
AUTOMATIC DETECTOR REQUIREMENTS	SMOKE AND HEAT DETECTORS SHALL BE P	ROVIDED IN ELEVATOR MACHINE ROOMS, LOBBIES AND	ASME A17.1 102.2, 211.3b; NFPA 72 6.1
	SHAFTS DUCT DETECTORS SHALL BE PROVIDED FO		IBC 716, UMC 607.
	DUCT DETECTORS SHALL BE PROVIDE FOR SMOKE DETECTORS SHALL BE PROVIDED F	MECHANICAL UNIT SHUTDOWN FOR AUTOMATIC CLOSING FIRE DOOR ON HOLD-OPENS	UMC 6 IBC 715.4
	SMOKE DETECTORS SHALL BE PROVIDED F	FOR ATRIUM SMOKE CONTROL SYSTEM	IBC 909.
OCCUPANT NOTIFICATION AND ALARM REQUIREMENTS	ALARM NOTIFICATION APPLIANCES SHALL E	BE PROVIDED THROUGHOUT THE BUILDING	IFC 907.
SEQUENCE OF OPERATIONS	AN ALARM CONDITION IN THE FIRE ALARM (AUDIO/VISUAL DEVICES SHALL SOUND CON RESET/SILENCED. 2. SHUT DOWN ALL AIR I REQUIREMENTS. FUME HOODS SHALL NOT SHALL BE INDIVIDUALLY ADDRESSED. 3. TF	CONTROL PANEL (FACP) SHALL TYPICALLY CAUSE: 1. ALL ITINUOUSLY THROUGHOUT THE BUILDING UNTIL MANUALLY HANDLING UNITS AND FANS IN ACCORDANCE WITH CODE BE SHUT DOWN AND OTHER CRITICAL EXHAUST SYSTEMS RANSMIT A SYSTEM ALARM SIGNAL TO THE CAMPUS (E CONTROL. 5. CLOSE ALL DOORS HELD OPEN	
FIRE-FIGHTERS SMOKE CONTROL PANEL	A FIRE-FIGHTERS SMOKE CONTROL PANEL	FOR THE ATRIUM SMOKE CONTROL SYSTEM	IBC 909.
SPECIAL HAZARDS			
	NO FLAMMABLE LIQUIDS OR MATERIALS IN	IBC 414	
	BUILDING NO HAZARDOUS MATERIALS IN BUILDING	IBC 414.5.5	
	NAME ODGING		
	NONE PROVIDED	IBC 414.5.5	
	NONE PROVIDED NONE PROVIDED	IBC 414.5.5	
HAZARDOUS MATERIAL DETECTION HAZARDOUS LABS VENTILATION SYSTEMS, HOODS, GAS STORAGE	2002 (4000000 FE) 17000 (4 1000) (5 100000000	IBC 414.7	
CABINETS		150 414.3	
	NONE PROVIDED		
BUILDING SERVICES			
	GENERATOR PROVIDED PROVIDED FOR THE SMOKE CONTROL SYST	TEM, IN ATRIUM	IBC 2702 IBC 909.11, IBC 2702.2
		DRE STORIES, WITH 90 MINUTE DOORS. WHERE ELEVATOR THE SUPPORTING FLOOR AND COLUMNS SHALL BE 2-HOUR	IBC1020
	VENTING OF HOIST WAYS NOT REQUIRED W AUTOMATIC SPRINKLER	WHERE BUILDING IS EQUIPPED WITH AN APPROVED	IBC 3004.1 EX
ELEVATOR MACHINE ROOM	MACHINE ROOM LESS ELEVATOR PROVIDED	D	
SHUNT TRIP	WHERE ELEVATOR HOIST WAYS OR MACHIN	NE ROOMS ARE PROTECTED BY AN AUTOMATIC SPRINKLER, ACCORDANCE WITH NFPA 72 SHALL BE PROVIDED	IBC 30
MACHINERY SPACES	2 HOUR FIRE RESISTIVE ASSEMBLY AND 90	MINUTE DOOR	IBC 3006
	BUILDING IS ACCESSIBLE EXCEPT IN THE FO	OLLOWING LOCATIONS	IBC 1103.2
	2. EQUIPMENT SPACES		IBC 1103.2
ACCESSIBLE ROUTE	PROVIDED PER IBC 1104.1		IBC 1104
	60 PERCENT OF ALL PUBLIC ENTRANCES SH LOADING AND SERVICE ENTRANCES THAT A REQUIRED TO BE ACCESSIBLE	HALL BE ACCESSIBLE ARE NOT THE ONLY ENTRANCE TO A TENANT SPACE ARE NOT	IBC 1105.1 E
PARKING	ACCESSIBLE SPACES PROVIDED PER IBC TA	ABLE 1106.1	IBC 11
		300-0-0-0-0-0-0-0-0-0-0-0-0-0-0-0-0-0-0	90000000000
	TOU ST AND DATUMNO DOOMS ARE ACCESS	IDLE AND ONE WATER OF COLUMN PARTMENT IS PROVIDED	
OTHER FEATURES		IBLE AND ONE WATER CLOSET COMPARTMENT IS PROVIDED 17.1. UNISEX FACILITY NOT PROVIDED PER 1109.2.1	IBC 1109
OTHER FEATURES		17.1. UNISEX FACILITY NOT PROVIDED PER 1109.2.1	IBC 1109
OTHER FEATURES SIGNAGE PLUMBING	PER WASHROOM COMPLYING WITH ICC A11 ACCESSIBLE ELEMENTS TO BE IDENTIFIED I	17.1. UNISEX FACILITY NOT PROVIDED PER 1109.2.1 PER IBC 1110.1	IBC 11
OTHER FEATURES SIGNAGE PLUMBING	PER WASHROOM COMPLYING WITH ICC A11 ACCESSIBLE ELEMENTS TO BE IDENTIFIED I DOMESTIC WATER SUPPLY AND DISTRIBUTI REQUIREMENTS.	PER IBC 1110.1 ION PIPING SHALL BE SIZED IN ACCORDANCE WITH IPC	IBC 11: IPC CHAPTER 6/APPENDIX
OTHER FEATURES SIGNAGE PLUMBING	PER WASHROOM COMPLYING WITH ICC A11 ACCESSIBLE ELEMENTS TO BE IDENTIFIED I DOMESTIC WATER SUPPLY AND DISTRIBUTI REQUIREMENTS. SANITARY DRAINAGE PIPING SHALL BE SIZE SUMPS AND EJECTORS SHALL BE DESIGNE	17.1. UNISEX FACILITY NOT PROVIDED PER 1109.2.1 PER IBC 1110.1 ION PIPING SHALL BE SIZED IN ACCORDANCE WITH IPC ED IN ACCORDANCE WITH IPC REQUIREMENTS. ED IN ACCORDANCE WITH IPC REQUIREMENTS.	IBC 11 IPC CHAPTER 6/APPENDIX IPC CHAPTER IPC 7
OTHER FEATURES SIGNAGE PLUMBING	PER WASHROOM COMPLYING WITH ICC A11 ACCESSIBLE ELEMENTS TO BE IDENTIFIED I DOMESTIC WATER SUPPLY AND DISTRIBUTI REQUIREMENTS. SANITARY DRAINAGE PIPING SHALL BE SIZE SUMPS AND EJECTORS SHALL BE DESIGNE VENT PIPING SHALL BE SIZED IN ACCORDAN	17.1. UNISEX FACILITY NOT PROVIDED PER 1109.2.1 PER IBC 1110.1 ION PIPING SHALL BE SIZED IN ACCORDANCE WITH IPC ED IN ACCORDANCE WITH IPC REQUIREMENTS. ID IN ACCORDANCE WITH IPC REQUIREMENTS. IN ACCORDANCE WITH IPC REQUIREMENTS. IN ACCORDANCE WITH IPC REQUIREMENTS.	IBC 11 IPC CHAPTER 6/APPENDIX IPC CHAPTER IPC 7 IPC CHAPTER IPC CHAPTER
OTHER FEATURES SIGNAGE PLUMBING	PER WASHROOM COMPLYING WITH ICC A11 ACCESSIBLE ELEMENTS TO BE IDENTIFIED I DOMESTIC WATER SUPPLY AND DISTRIBUTI REQUIREMENTS. SANITARY DRAINAGE PIPING SHALL BE SIZE SUMPS AND EJECTORS SHALL BE DESIGNE VENT PIPING SHALL BE SIZED IN ACCORDAN STORM DRAINAGE PIPING SHALL BE SIZED IN ACTURAL GAS PIPING SHALL BE SIZED IN ACTURATED THE PROPERTY OF THE PROP	17.1. UNISEX FACILITY NOT PROVIDED PER 1109.2.1 PER IBC 1110.1 ION PIPING SHALL BE SIZED IN ACCORDANCE WITH IPC ED IN ACCORDANCE WITH IPC REQUIREMENTS. ID IN ACCORDANCE WITH IPC REQUIREMENTS. NCE WITH IPC REQUIREMENTS. IN ACCORDANCE WITH IPC REQUIREMENTS. COORDANCE WITH IFG REQUIREMENTS. IN ACCORDANCE WITH IFG REQUIREMENTS. OCONDANCE WITH IFGC REQUIREMENTS. ND EVAPORATORS SHALL BE CONVEYED FROM THE DRAIN	IBC 11 IPC CHAPTER 6/APPENDIX IPC CHAPTER IPC 7 IPC CHAPTER IPC CHAPTER IFGC CHAPTER
SIGNAGE PLUMBING	PER WASHROOM COMPLYING WITH ICC A11 ACCESSIBLE ELEMENTS TO BE IDENTIFIED I DOMESTIC WATER SUPPLY AND DISTRIBUTI REQUIREMENTS. SANITARY DRAINAGE PIPING SHALL BE SIZE SUMPS AND EJECTORS SHALL BE DESIGNE VENT PIPING SHALL BE SIZED IN ACCORDAY STORM DRAINAGE PIPING SHALL BE SIZED I NATURAL GAS PIPING SHALL BE SIZED IN ACCONDENSATE FROM ALL COOLING COILS AI	17.1. UNISEX FACILITY NOT PROVIDED PER 1109.2.1 PER IBC 1110.1 ION PIPING SHALL BE SIZED IN ACCORDANCE WITH IPC ED IN ACCORDANCE WITH IPC REQUIREMENTS. ID IN ACCORDANCE WITH IPC REQUIREMENTS. NCE WITH IPC REQUIREMENTS. IN ACCORDANCE WITH IPC REQUIREMENTS. COORDANCE WITH IFG REQUIREMENTS. IN ACCORDANCE WITH IFG REQUIREMENTS. OCONDANCE WITH IFGC REQUIREMENTS. ND EVAPORATORS SHALL BE CONVEYED FROM THE DRAIN	IBC 11 IPC CHAPTER 6/APPENDIX IPC CHAPTER IPC 7 IPC CHAPTER IPC CHAPTER IFGC CHAPTER
SIGNAGE PLUMBING VENTILATION AND EXHAUST	PER WASHROOM COMPLYING WITH ICC A11 ACCESSIBLE ELEMENTS TO BE IDENTIFIED I DOMESTIC WATER SUPPLY AND DISTRIBUTI REQUIREMENTS. SANITARY DRAINAGE PIPING SHALL BE SIZE SUMPS AND EJECTORS SHALL BE DESIGNE VENT PIPING SHALL BE SIZED IN ACCORDAY STORM DRAINAGE PIPING SHALL BE SIZED I NATURAL GAS PIPING SHALL BE SIZED IN ACCONDENSATE FROM ALL COOLING COILS AI	17.1. UNISEX FACILITY NOT PROVIDED PER 1109.2.1 PER IBC 1110.1 ION PIPING SHALL BE SIZED IN ACCORDANCE WITH IPC ED IN ACCORDANCE WITH IPC REQUIREMENTS. ID IN ACCORDANCE WITH IPC REQUIREMENTS. NCE WITH IPC REQUIREMENTS. IN ACCORDANCE WITH IFC REQUIREMENTS. CCORDANCE WITH IFGC REQUIREMENTS. ND EVAPORATORS SHALL BE CONVEYED FROM THE DRAIN DISPOSAL.	IBC 11 IPC CHAPTER 6/APPENDIX IPC CHAPTER IPC CHAPTER IPC CHAPTER IFGC CHAPTER IMC 307.2
SIGNAGE PLUMBING VENTILATION AND EXHAUST	PER WASHROOM COMPLYING WITH ICC A11 ACCESSIBLE ELEMENTS TO BE IDENTIFIED I DOMESTIC WATER SUPPLY AND DISTRIBUTI REQUIREMENTS. SANITARY DRAINAGE PIPING SHALL BE SIZE SUMPS AND EJECTORS SHALL BE DESIGNE VENT PIPING SHALL BE SIZED IN ACCORDAN STORM DRAINAGE PIPING SHALL BE SIZED IN ACCONDENSATE FROM ALL COOLING COILS AI PAN OUTLET TO AN APPROVED PLACE OF D VENTILATION AIR SHALL BE PROVIDED IN AGE EXHAUST SYSTEMS SHALL BE STORY THE OUTLE SHAPP EXHAUST SYSTEMS SHAPP EXHAPP EXHAUST SYSTEMS SHAPP EXHAUST SYSTEMS SHAPP EXHAUST SYSTEMS STORY THE OUTLE SYSTEMS SHAPP EXHAPP EXHAPP EXHAUST SYSTEMS SHAPP EXHAUST SYSTEMS SHAPP EXHAPP EXHAPP EXHAPP EXHAUST SYSTEMS SHAPP EXHAPP	17.1. UNISEX FACILITY NOT PROVIDED PER 1109.2.1 PER IBC 1110.1 ION PIPING SHALL BE SIZED IN ACCORDANCE WITH IPC ED IN ACCORDANCE WITH IPC REQUIREMENTS. ID IN ACCORDANCE WITH IPC REQUIREMENTS. NCE WITH IPC REQUIREMENTS. IN ACCORDANCE WITH IPC REQUIREMENTS. CCORDANCE WITH IPC REQUIREMENTS. ND EVAPORATORS SHALL BE CONVEYED FROM THE DRAIN DISPOSAL. CCORDANCE WITH IMC REQUIREMENTS. N ACCORDANCE WITH IMC REQUIREMENTS. N ACCORDANCE WITH IMC REQUIREMENTS. REE STORIES SHALL BE PROVIDED WITH A MEANS FOR RE AIR IN CASE OF FIRE.	IBC 11 IPC CHAPTER 6/APPENDIX IPC CHAPTER IPC 7 IPC CHAPTER IPC CHAPTER IPG CHAPTER IMC 307.2
SIGNAGE PLUMBING VENTILATION AND EXHAUST	PER WASHROOM COMPLYING WITH ICC A11 ACCESSIBLE ELEMENTS TO BE IDENTIFIED I DOMESTIC WATER SUPPLY AND DISTRIBUTI REQUIREMENTS. SANITARY DRAINAGE PIPING SHALL BE SIZE SUMPS AND EJECTORS SHALL BE DESIGNE VENT PIPING SHALL BE SIZED IN ACCORDAN STORM DRAINAGE PIPING SHALL BE SIZED IN AC CONDENSATE FROM ALL COOLING COILS AI PAN OUTLET TO AN APPROVED PLACE OF D VENTILATION AIR SHALL BE PROVIDED IN AC EXHAUST SYSTEMS SHALL BE SYSTEM SHALL BE HOSTWAY VENTS SHALL BE LOCATED AT T	17.1. UNISEX FACILITY NOT PROVIDED PER 1109.2.1 PER IBC 1110.1 ION PIPING SHALL BE SIZED IN ACCORDANCE WITH IPC ED IN ACCORDANCE WITH IPC REQUIREMENTS. ID IN ACCORDANCE WITH IPC REQUIREMENTS. IN ACCORDANCE WITH IPC REQUIREMENTS. IN ACCORDANCE WITH IPC REQUIREMENTS. ND EVAPORATORS SHALL BE CONVEYED FROM THE DRAIN DISPOSAL. CCORDANCE WITH IMC REQUIREMENTS. IN ACCORDANCE WITH IMC REQUIREMENTS.	IBC 11 IPC CHAPTER 6/APPENDIX IPC CHAPTER IPC 7 IPC CHAPTER IPC CHAPTER IPG CHAPTER IMC 307.2
SIGNAGE PLUMBING VENTILATION AND EXHAUST	PER WASHROOM COMPLYING WITH ICC A11 ACCESSIBLE ELEMENTS TO BE IDENTIFIED I DOMESTIC WATER SUPPLY AND DISTRIBUTI REQUIREMENTS. SANITARY DRAINAGE PIPING SHALL BE SIZE SUMPS AND EJECTORS SHALL BE DESIGNE VENT PIPING SHALL BE SIZED IN ACCORDAN STORM DRAINAGE PIPING SHALL BE SIZED IN AC CONDENSATE FROM ALL COOLING COILS AI PAN OUTLET TO AN APPROVED PLACE OF D VENTILATION AIR SHALL BE PROVIDED IN AC EXHAUST SYSTEMS SHALL BE PROVIDED IN ELEVATORS PENETRATING MORE THAN THI VENTING SMOKE AND GASES TO THE OUTE HOISTWAY VENTS SHALL BE LOCATED AT T DIRECTLY TO THE OUTER AIR OR THROUGH LESS THAN 3 SQUARE FEET FOR EACH ESE BE REQUIRED TO BE PERMANENTLY OPEN	17.1. UNISEX FACILITY NOT PROVIDED PER 1109.2.1 PER IBC 1110.1 ION PIPING SHALL BE SIZED IN ACCORDANCE WITH IPC ED IN ACCORDANCE WITH IPC REQUIREMENTS. ID IN ACCORDANCE WITH IPC REQUIREMENTS. NCE WITH IPC REQUIREMENTS. IN ACCORDANCE WITH IPC REQUIREMENTS. CCORDANCE WITH IPC REQUIREMENTS. ND EVAPORATORS SHALL BE CONVEYED FROM THE DRAIN DISPOSAL. CCORDANCE WITH IMC REQUIREMENTS. N ACCORDANCE WITH IMC REQUIREMENTS. REE STORIES SHALL BE PROVIDED WITH A MEANS FOR IR AIR IN CASE OF FIRE. HE TOP OF THE HOISTWAY AND SHALL OPEN EITHER HONCOMBUSTIBLE DUCTS TO THE OUTER AIR. STHAN 3-1/2 PERCENT OF THE AREA OF THE HOISTWAY NOR VATOR CAR. THE TOTAL REQUIRED VENT AREA SHALL NOT WHERE ALL THE VENT OPENINGS AUTOMATICALLY OPEN INTOL LOBBIES OR HOISTWAY, UPON POWER FAILURE AND ITOR LOBBIES OR HOISTWAY, UPON POWER FAILURE AND	IBC 11 IPC CHAPTER 6/APPENDIX IPC CHAPTER IPC CHAPTER IPC CHAPTER IFGC CHAPTER IMC 307.3
SIGNAGE PLUMBING VENTILATION AND EXHAUST	PER WASHROOM COMPLYING WITH ICC A11 ACCESSIBLE ELEMENTS TO BE IDENTIFIED I DOMESTIC WATER SUPPLY AND DISTRIBUTI REQUIREMENTS. SANITARY DRAINAGE PIPING SHALL BE SIZE SUMPS AND EJECTORS SHALL BE DESIGNE VENT PIPING SHALL BE SIZED IN ACCORDAN STORM DRAINAGE PIPING SHALL BE SIZED IN AC CONDENSATE FROM ALL COOLING COILS AI PAN OUTLET TO AN APPROVED PLACE OF D VENTILATION AIR SHALL BE PROVIDED IN AC EXHAUST SYSTEMS SHALL BE PROVIDED IN ELEVATORS PENETRATING MORE THAN THI VENTING SMOKE AND GASES TO THE OUTE HOISTWAY VENTS SHALL BE LOCATED AT T DIRECTLY TO THE OUTER AIR OR THROUGH- HOISTWAY VENTS SHALL BE LOCATED AT T DIRECTLY TO THE OUTER AIR OR THROUGH- HOISTWAY VENT AREA SHALL NOT BE LESS LESS THAN 3 SQUARE FEET FOR EACH ELE' BE REQUIRED TO BE PERMANENTLY OPEN I UPON DETECTION OF SMOKE IN THE ELEVA UPON ACTIVATION OF A MANUAL OVERRIDE OUTSIDE AIR INTAKES SHALL BE LOCATED A CONTAMINANT SUCH AS VENTS, CHIMNEYS LOADING DOCKS, EXCEPT AS OTHERWISES	17.1. UNISEX FACILITY NOT PROVIDED PER 1109.2.1 PER IBC 1110.1 ION PIPING SHALL BE SIZED IN ACCORDANCE WITH IPC ED IN ACCORDANCE WITH IPC REQUIREMENTS. ID IN ACCORDANCE WITH IPC REQUIREMENTS. IN ACCORDANCE WITH IPC REQUIREMENTS. IN ACCORDANCE WITH IPC REQUIREMENTS. CCORDANCE WITH IPC REQUIREMENTS. IN DEVAPORATORS SHALL BE CONVEYED FROM THE DRAIN DISPOSAL. CCORDANCE WITH IMC REQUIREMENTS. IN ACCORDANCE WITH IMC ACCORDANCE WITH A MEANS FOR INCOME. IN ACCORDANCE WITH IMC ACCORDANCE WITH A MEANS FOR INCOME. IN ACCORDANCE WITH IMC ACCORDANCE WITH A MEANS FOR INCOME. IN ACCORDANCE WITH IMC ACCORDANCE WITH A MEANS FOR INCOME. IN ACCORDANCE WITH IMC ACCORDANCE WITH A MEANS FOR INCOME. IN ACCORDANCE WITH IMC ACCORDANCE WITH A MEANS FOR INCOME. IN ACCORDANCE WITH IMC ACCORDANCE WITH A MEANS FOR INCOME. IN ACCORDANCE WITH IMC ACCORDANCE WITH A MEANS FOR INCOME. IN ACCORDANCE WITH IMC ACCORDANCE WITH IMC ACCORDANCE WITH A MEANS FOR INCOME. IN ACCORDANCE WITH IMC	IPC CHAPTER 6/APPENDIX IPC CHAPTER IPC CHAPTER IPC CHAPTER IFGC CHAPTER IMC 307.: IMC CHAPTER IMC CHAPTER IMC CHAPTER IMC 300.
OTHER FEATURES SIGNAGE PLUMBING VENTILATION AND EXHAUST	PER WASHROOM COMPLYING WITH ICC A11 ACCESSIBLE ELEMENTS TO BE IDENTIFIED I DOMESTIC WATER SUPPLY AND DISTRIBUTI REQUIREMENTS. SANITARY DRAINAGE PIPING SHALL BE SIZE SUMPS AND EJECTORS SHALL BE DESIGNE VENT PIPING SHALL BE SIZED IN ACCORDAY STORM DRAINAGE PIPING SHALL BE SIZED IN AC CONDENSATE FROM ALL COOLING COILS AI PAN OUTLET TO AN APPROVED PLACE OF D VENTILATION AIR SHALL BE PROVIDED IN AC EXHAUST SYSTEMS SHALL BE LOCATED AT HOISTWAY VENT AREA SHALL NOT BE LESS LESS THAN 3 SQUARE FEET FOR EACH ELE BE REQUIRED TO BE PERMANENTLY OPEN IN UPON DETECTION OF SMOKE IN THE ELEVA UPON ACTIVATION OF A MANUAL OVERRIDE OUTSIDE AIR INTAKES SHALL BE LOCATED A CONTAMINANT SUCH AS VENTS, CHIMMEYS LOCATED WITHIN 10 FEET OF AN INTAKE IS LOCATED WITHIN 10 FEET OF AN INTAKE	17.1. UNISEX FACILITY NOT PROVIDED PER 1109.2.1 PER IBC 1110.1 ION PIPING SHALL BE SIZED IN ACCORDANCE WITH IPC ED IN ACCORDANCE WITH IPC REQUIREMENTS. ID IN ACCORDANCE WITH IPC REQUIREMENTS. IN ACCORDANCE WITH IPC REQUIREMENTS. IN ACCORDANCE WITH IPC REQUIREMENTS. IN ACCORDANCE WITH IFG REQUIREMENTS. IN EVAPORATORS SHALL BE CONVEYED FROM THE DRAIN DISPOSAL. CCORDANCE WITH IMC REQUIREMENTS. IN ACCORDANCE WITH IMC REQUIREMENTS. REE STORIES SHALL BE PROVIDED WITH A MEANS FOR BRITE IN CASE OF FIRE. THE TOP OF THE HOISTWAY AND SHALL OPEN EITHER HONCOMBUSTIBLE DUCTS TO THE OUTER AIR. STHAN 3-1/2 PERCENT OF THE AREA OF THE HOISTWAY NOR VATOR CAR. THE TOTAL REQUIRED VENT AREA SHALL NOT WHERE ALL THE VENT OPENINGS AUTOMATICALLY OPEN ATOR LOBBIES OR HOISTWAY, UPON POWER FAILURE AND E CONTROL. A MINIMUM OF 10 FEET FROM ANY HAZARDOUS OR NOXIOUS S, PLUMBING VENTS, STREETS, ALLEYS, PARKING LOTS AND SPECIFIED IN THE IMC. WHERE A SOURCE OF CONTAMINANT OPENING, SUCH OPENING SHALL BE LOCATED A MINIMUM OF E.	IBC 11 IPC CHAPTER 6/APPENDIX IPC CHAPTER IPC CHAPTER IPC CHAPTER IMC 307.2 IMC CHAPTER IMC CHAPTER IMC CHAPTER IMC 3004
SIGNAGE PLUMBING VENTILATION AND EXHAUST	PER WASHROOM COMPLYING WITH ICC A11 ACCESSIBLE ELEMENTS TO BE IDENTIFIED I DOMESTIC WATER SUPPLY AND DISTRIBUTI REQUIREMENTS. SANITARY DRAINAGE PIPING SHALL BE SIZE SUMPS AND EJECTORS SHALL BE DESIGNE VENT PIPING SHALL BE SIZED IN ACCORDAN STORM DRAINAGE PIPING SHALL BE SIZED IN ACCONDENSATE FROM ALL COOLING COILS AI PAN OUTLET TO AN APPROVED PLACE OF D VENTILATION AIR SHALL BE PROVIDED IN AC CONDENSATE FROM ALL COOLING COILS AI PAN OUTLET TO AN APPROVED PLACE OF D VENTILATION AIR SHALL BE PROVIDED IN ELEVATORS PENETRATING MORE THAN THI VENTING SMOKE AND GASES TO THE OUTE HOISTWAY VENTS SHALL BE LOCATED AT T DIRECTLY TO THE OUTER AIR OR THROUGH HOISTWAY VENT AREA SHALL NOT BE LESS LESS THAN 3 SQUARE FEET FOR EACH ELE' BE REQUIRED TO BE PERMANENTLY OPEN I UPON DETECTION OF SMOKE IN THE ELEVA UPON ACTIVATION OF A MANUAL OVERRIDE OUTSIDE AIR INTAKES SHALL BE LOCATED A CONTAMINANT SUCH AS VENTS, CHIMNEYS LOADING DOCKS, EXCEPT AS OTHERWISE S IS LOCATED WITHIN 10 FEET OF AN INTAKE 2 FEET BELOW THE CONTAMINANT SOURCE	17.1. UNISEX FACILITY NOT PROVIDED PER 1109.2.1 PER IBC 1110.1 ION PIPING SHALL BE SIZED IN ACCORDANCE WITH IPC ED IN ACCORDANCE WITH IPC REQUIREMENTS. ID IN ACCORDANCE WITH IPC REQUIREMENTS. IN ACCORDANCE WITH IPC REQUIREMENTS. IN ACCORDANCE WITH IPC REQUIREMENTS. IN ACCORDANCE WITH IFG REQUIREMENTS. IN EVAPORATORS SHALL BE CONVEYED FROM THE DRAIN DISPOSAL. CCORDANCE WITH IMC REQUIREMENTS. IN ACCORDANCE WITH IMC REQUIREMENTS. REE STORIES SHALL BE PROVIDED WITH A MEANS FOR BRITE IN CASE OF FIRE. THE TOP OF THE HOISTWAY AND SHALL OPEN EITHER HONCOMBUSTIBLE DUCTS TO THE OUTER AIR. STHAN 3-1/2 PERCENT OF THE AREA OF THE HOISTWAY NOR VATOR CAR. THE TOTAL REQUIRED VENT AREA SHALL NOT WHERE ALL THE VENT OPENINGS AUTOMATICALLY OPEN ATOR LOBBIES OR HOISTWAY, UPON POWER FAILURE AND E CONTROL. A MINIMUM OF 10 FEET FROM ANY HAZARDOUS OR NOXIOUS S, PLUMBING VENTS, STREETS, ALLEYS, PARKING LOTS AND SPECIFIED IN THE IMC. WHERE A SOURCE OF CONTAMINANT OPENING, SUCH OPENING SHALL BE LOCATED A MINIMUM OF E.	IBC 11

AndersonMasonDale Architects

CU Institute of Behavioral Science Grandview Avenue and 15th Street

2007025.00

University of Colorado at Boulder Department of Facilities Management Planning, Design and Construction Research Laboratory 2 1540 30th Street, 3rd Floor 453 UCB Boulder, CO 80309

Architect AndersonMasonDale Architects, P.C. 1615 17th Street Denver, CO, 80202 Telephone: 303-294-9448 FAX: 303-294-0762 E-mail (optional)

Civil SEH, Inc.

Colorado Center Tower One, Suite 6000 2000 South Colorado Boulevard Denver, CO 80222 Telephone: 720-540-6885

Landscape

Lime Green Design 900 East Louisiana Avenue, Suite 209 Denver, CO 80210 Telephone: 303-733-7558 FAX: 303-733-0959

Structural Martin Martin 12499 West Colfax Avenue Lakewood, CO 80215 Telephone: 303-431-6100

FAX: 303-431-6866

Mechanical / Plumbing Shaffer Baucom 7333 West Jefferson Avenue, Suite 230 Lakewood, CO 80235 Telephone: 303-986-8200

Electrical

BCER Engineering 5420 Ward Road, Suite 200 Arvada, CO 80002 Telephone: 303-422-7400 FAX: 303-422-7900

FAX: 303-986-8222

IT / Telecom / AV Rimrock Group 2060 Briargate Parkway, Suite 220 Colorado Springs, CO 80920 Telephone: 719-533-1112 FAX: 719-533-1113

Elevator

Lerch Bates 7899 South Lincoln Court, Suite 204 Littleton, CO 80122 Telephone: 720-283-8182 FAX: 720-283-8184

Schematic Design May 23, 2008

Project Number: 2007025.00


CODE REVIEW

Approved By:

101 FIRE TREATED PLYWOOD102 FIRE ALARM CONTROL PANEL

GENERAL NOTES

1. GENERAL NOTE

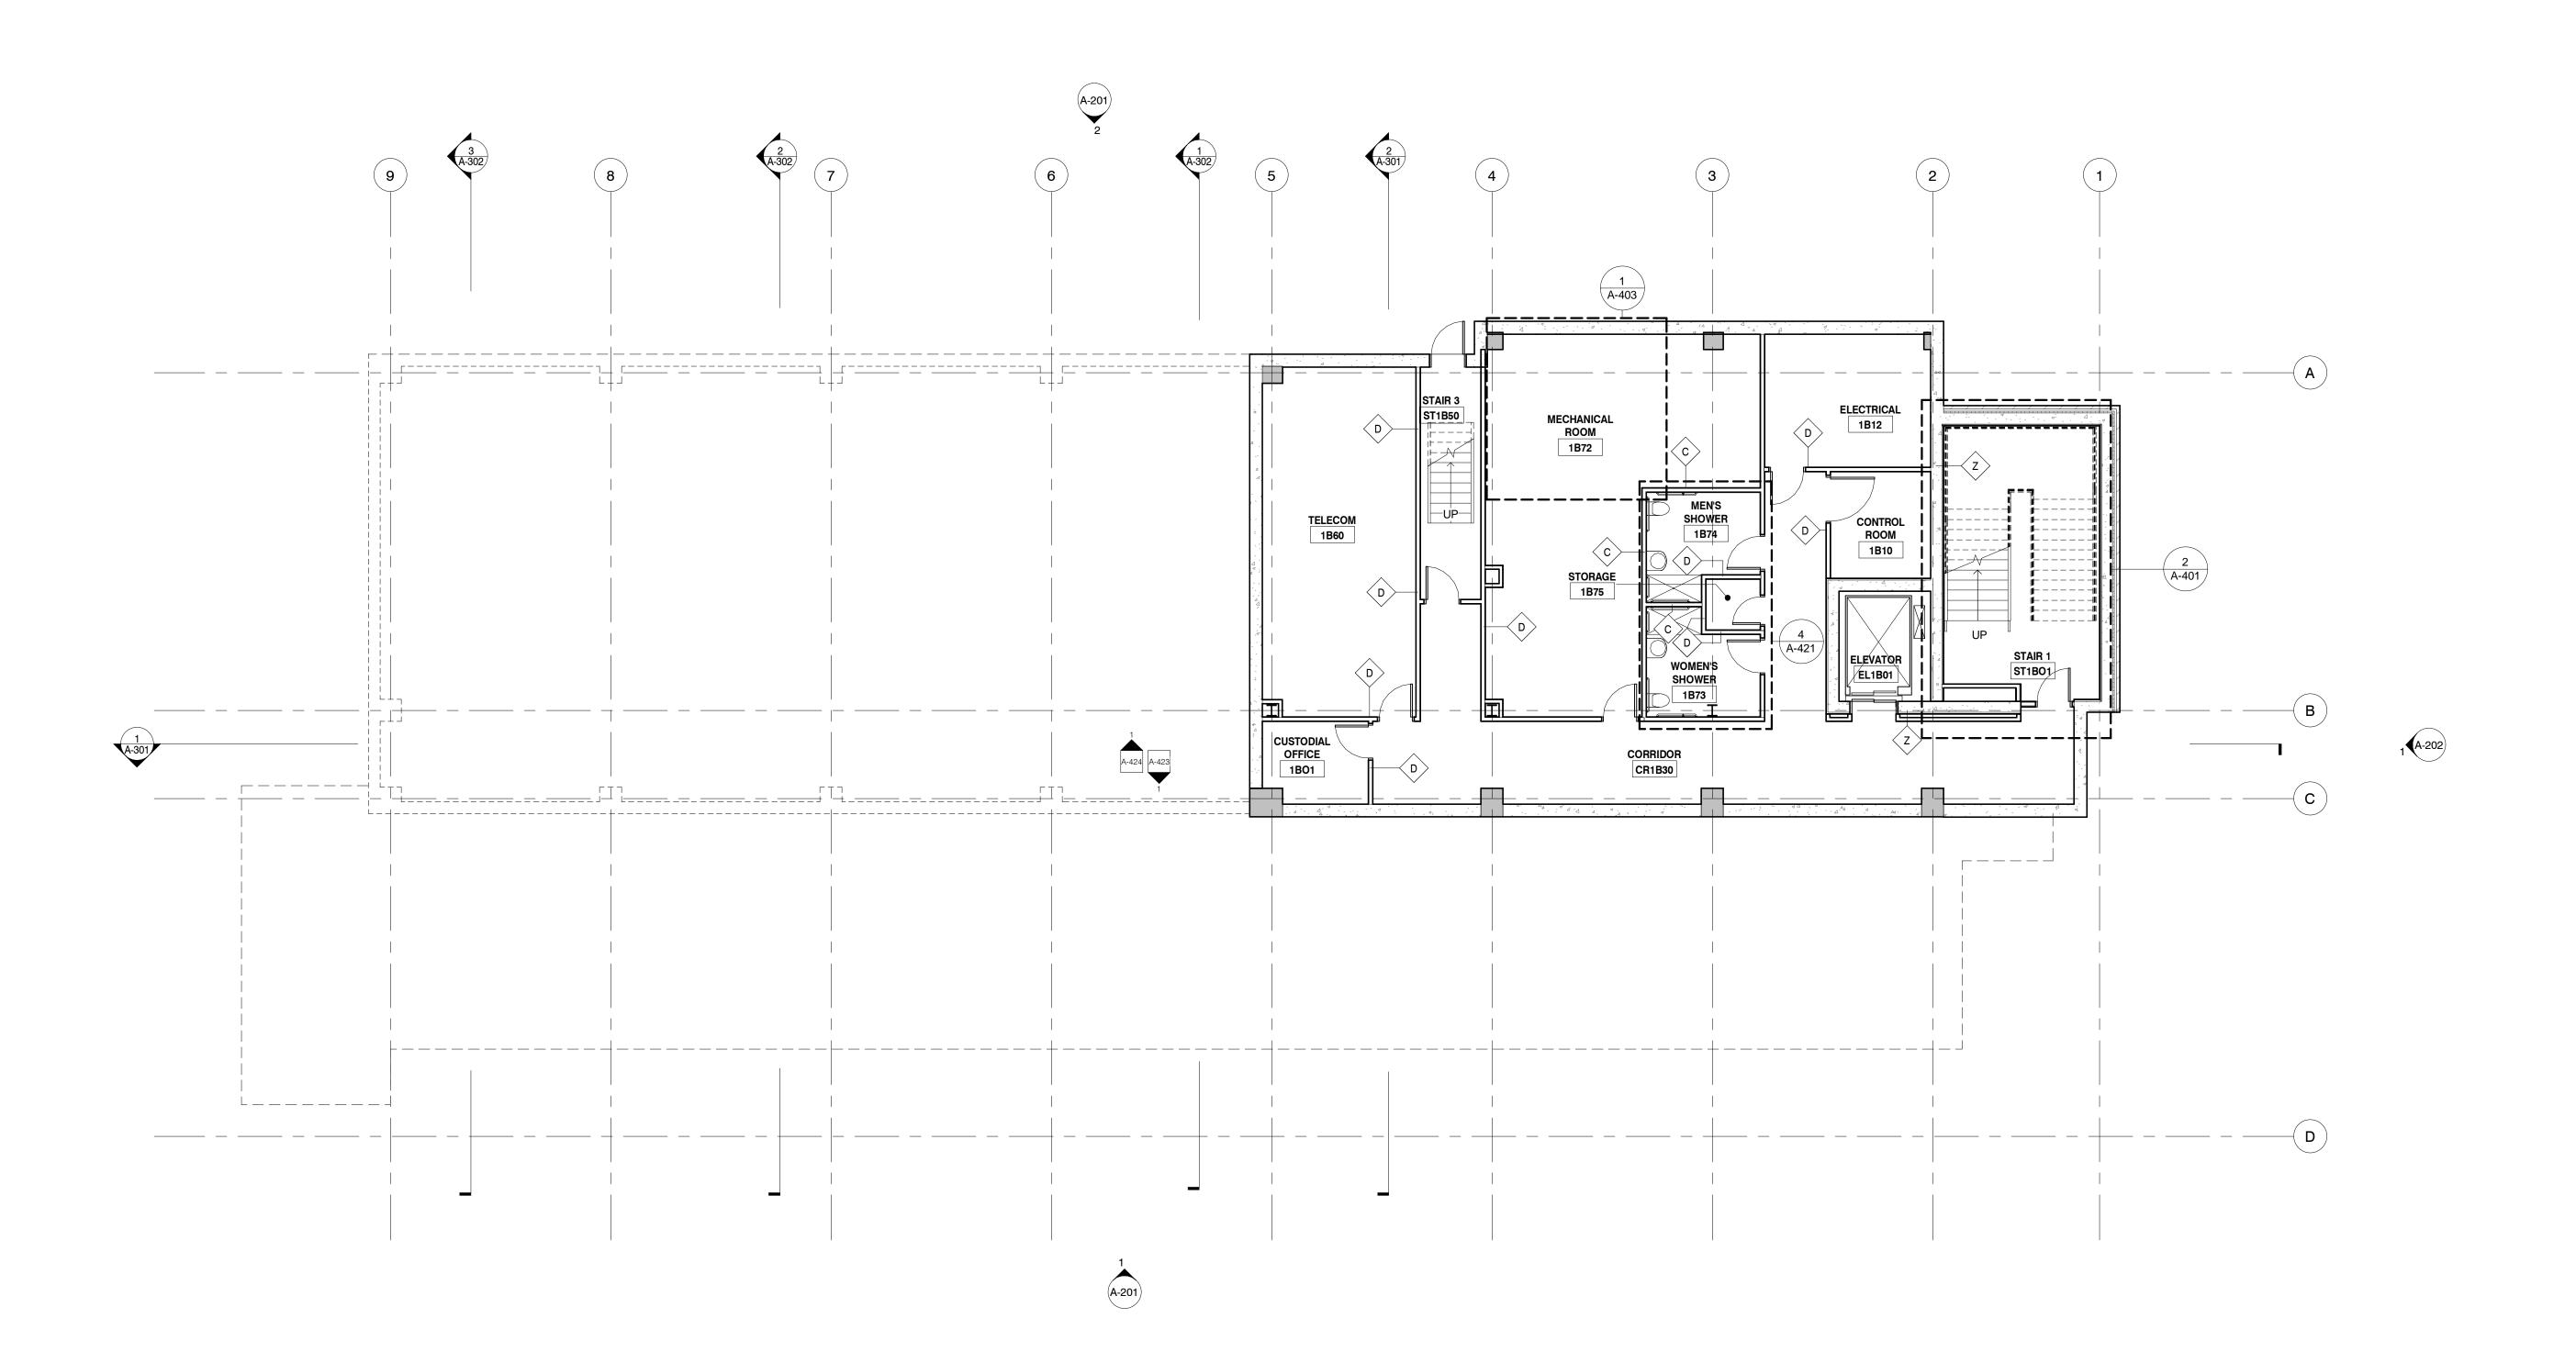

AndersonMasonDale Architects

Institute of Behavioral Science 264

Grandview Avenue and 15th Street 2007025

Owner

Department of Facilities Management Planning, Design and Construction Research Laboratory 2 1540 30th Street, 3rd Floor 453 UCB Boulder, CO 80309

Anderson Mason Do

AndersonMasonDale Architects, P.C. 3198 Speer Boulevard Denver, CO, 80211 Telephone: 303-294-9448 FAX: 303-294-0762

Civil

Colorado Center Tower One, Suite 6000 2000 South Colorado Boulevard Denver, CO 80222 Telephone: 720-540-6885

Landscape

Structural

Martin Martin

Lime Green Design 900 East Louisiana Avenue, Suite 209 Denver, CO 80210 Telephone: 303-733-7558 FAX: 303-733-0959

12499 West Colfax Avenue Lakewood, CO 80215 Telephone: 303-431-6100 FAX: 303-431-6866

Mechanical / Plumbing
Shaffer Baucom
7333 West Jefferson Avenue, Suite 230
Lakewood, CO 80235

Telephone: 303-986-8200 FAX: 303-986-8222

BCER Engineering 5420 Ward Road, Suite 200 Arvada, CO 80002 Telephone: 303-422-7400 FAX: 303-422-7900

Electrical

IT / Telecom / AV
Rimrock Group
2060 Briargate Parkway, Suite 220
Colorado Springs, CO 80920
Telephone: 719-533-1112
FAX: 719-533-1113

Elevator

Lerch Bates 7899 South Lincoln Court, Suite 204 Littleton, CO 80122 Telephone: 720-283-8182 FAX: 720-283-8184

Issue	Date

Project Number: 200702

Drawn By:
Reviewed By:

Approved By:

BASEMENT LEVEL

A-100





Institute of Behavioral Science 264

Grandview Avenue and 15th Street 2007025

Owner

Department of Facilities Management Planning, Design and Construction Research Laboratory 2 1540 30th Street, 3rd Floor 453 UCB Boulder, CO 80309

Architect

Civil

AndersonMasonDale Architects, P.C. 3198 Speer Boulevard Denver, CO, 80211 Telephone: 303-294-9448 FAX: 303-294-0762

SEH, Inc. Colorado Center Tower One, Suite 6000 2000 South Colorado Boulevard Denver, CO 80222 Telephone: 720-540-6885

Landscape Lime Green Design

900 East Louisiana Avenue, Suite 209 Denver, CO 80210 Telephone: 303-733-7558 FAX: 303-733-0959

Martin Martin 12499 West Colfax Avenue Lakewood, CO 80215 Telephone: 303-431-6100 FAX: 303-431-6866

Structural

Mechanical / Plumbing Shaffer Baucom 7333 West Jefferson Avenue, Suite 230 Lakewood, CO 80235

Electrical BCER Engineering 5420 Ward Road, Suite 200 Arvada, CO 80002

Telephone: 303-422-7400

Telephone: 303-986-8200 FAX: 303-986-8222

FAX: 303-422-7900 IT / Telecom / AV Rimrock Group 2060 Briargate Parkway, Suite 220 Colorado Springs, CO 80920

Telephone: 719-533-1112 FAX: 719-533-1113 Elevator


Lerch Bates

7899 South Lincoln Court, Suite 204 Littleton, CO 80122 Telephone: 720-283-8182 FAX: 720-283-8184

Project Number:

FIRST LEVEL FLOOR PLAN



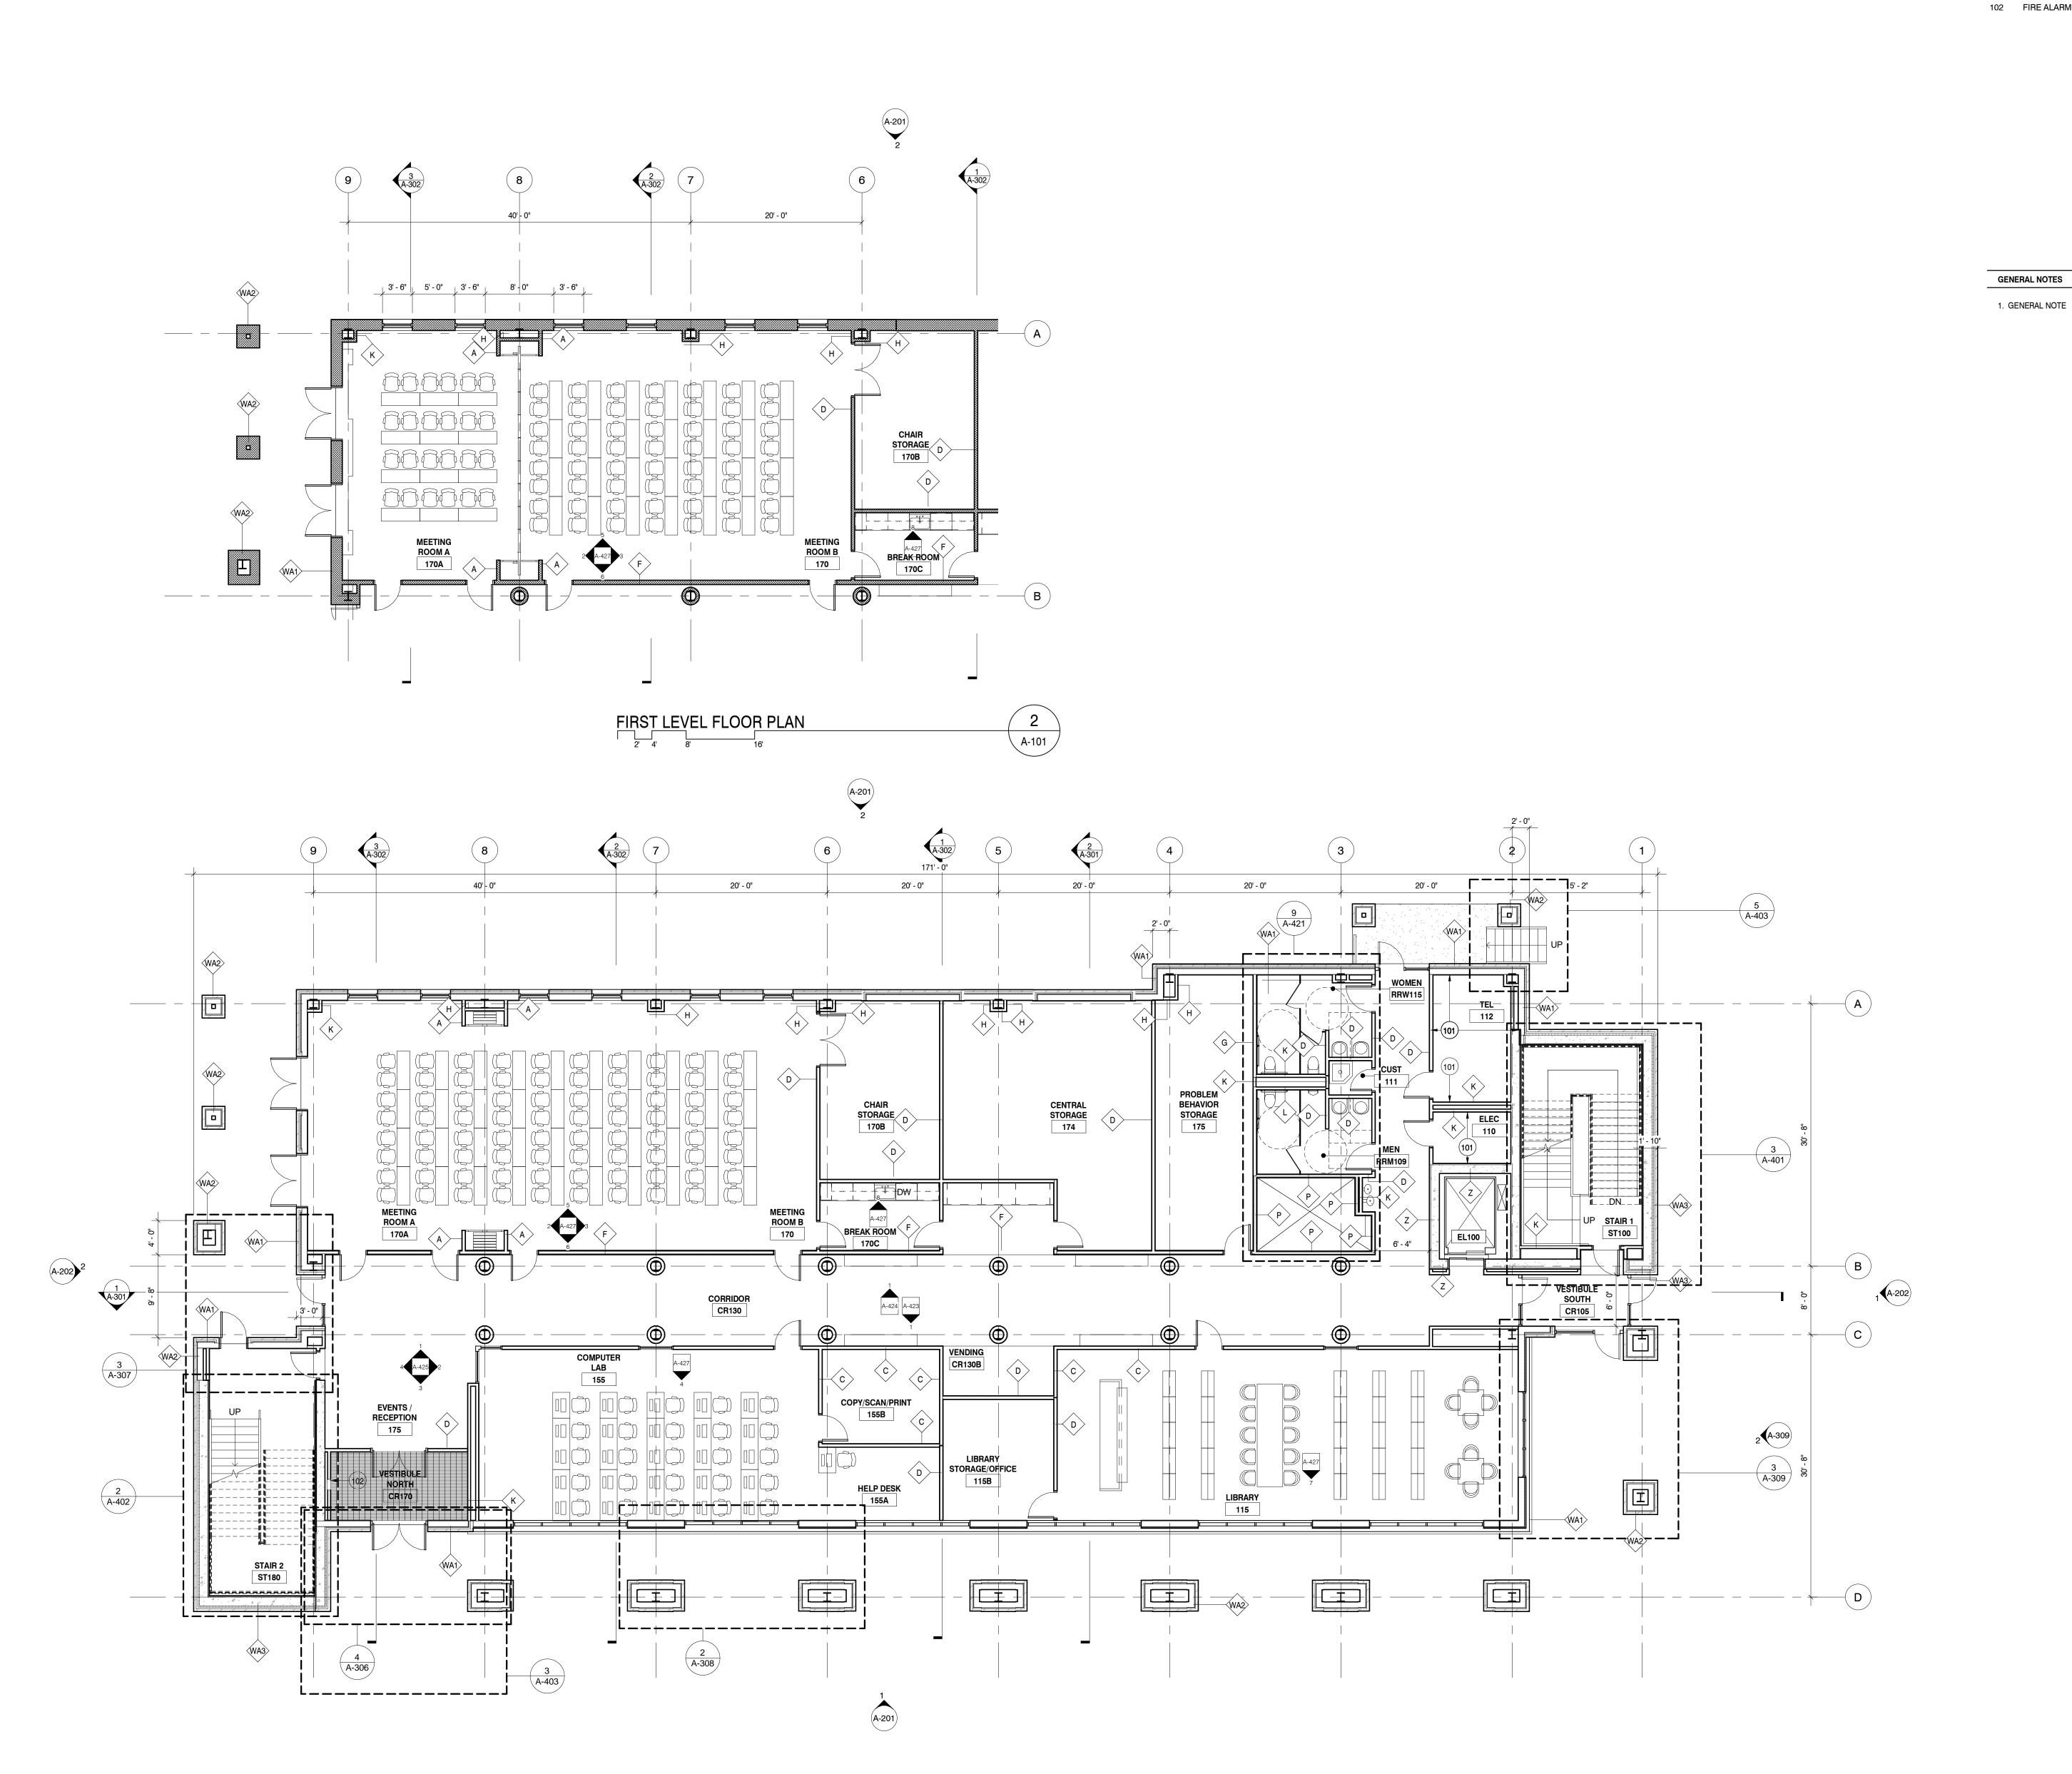

GENERAL NOTES

1. GENERAL NOTE

101 FIRE TREATED PLYWOOD 102 FIRE ALARM CONTROL PANEL

AndersonMasonDale Architects

Institute of Behavioral Science 264

Grandview Avenue and 15th Street 2007025

Owner

Department of Facilities Management Planning, Design and Construction Research Laboratory 2 1540 30th Street, 3rd Floor 453 UCB Boulder, CO 80309

Architect

AndersonMasonDale Architects, P.C. 3198 Speer Boulevard Denver, CO, 80211 Telephone: 303-294-9448 FAX: 303-294-0762

Civil

Colorado Center Tower One, Suite 6000 2000 South Colorado Boulevard Denver, CO 80222 Telephone: 720-540-6885

Landscape

Lime Green Design 900 East Louisiana Avenue, Suite 209 Denver, CO 80210 Telephone: 303-733-7558 FAX: 303-733-0959

12499 West Colfax Avenue Lakewood, CO 80215 Telephone: 303-431-6100 FAX: 303-431-6866

Structural

Martin Martin

Mechanical / Plumbing Shaffer Baucom 7333 West Jefferson Avenue, Suite 230 Lakewood, CO 80235

Telephone: 303-986-8200 FAX: 303-986-8222

Electrical

BCER Engineering 5420 Ward Road, Suite 200 Arvada, CO 80002 Telephone: 303-422-7400 FAX: 303-422-7900

IT / Telecom / AV Rimrock Group 2060 Briargate Parkway, Suite 220 Colorado Springs, CO 80920 Telephone: 719-533-1112 FAX: 719-533-1113


Elevator Lerch Bates 7899 South Lincoln Court, Suite 204 Littleton, CO 80122

Telephone: 720-283-8182

FAX: 720-283-8184

Project Number:

SECOND LEVEL FLOOR PLAN



101 FIRE TREATED PLYWOOD 102 FIRE ALARM CONTROL PANEL

GENERAL NOTES

1. GENERAL NOTE

AndersonMasonDale Architects

Institute of Behavioral Science 264

Grandview Avenue and 15th Street 2007025

Owner

Department of Facilities Management Planning, Design and Construction Research Laboratory 2 1540 30th Street, 3rd Floor 453 UCB Boulder, CO 80309

Architect

AndersonMasonDale Architects, P.C. 3198 Speer Boulevard Denver, CO, 80211 Telephone: 303-294-9448 FAX: 303-294-0762

Civil Colorado Center Tower One, Suite 6000 2000 South Colorado Boulevard Denver, CO 80222 Telephone: 720-540-6885

Landscape

Lime Green Design 900 East Louisiana Avenue, Suite 209 Denver, CO 80210 Telephone: 303-733-7558 FAX: 303-733-0959

12499 West Colfax Avenue Lakewood, CO 80215

Structural

Martin Martin

Telephone: 303-431-6100 FAX: 303-431-6866

Mechanical / Plumbing

Shaffer Baucom 7333 West Jefferson Avenue, Suite 230 Lakewood, CO 80235 Telephone: 303-986-8200 FAX: 303-986-8222

Electrical

BCER Engineering 5420 Ward Road, Suite 200 Arvada, CO 80002 Telephone: 303-422-7400 FAX: 303-422-7900

IT / Telecom / AV Rimrock Group 2060 Briargate Parkway, Suite 220 Colorado Springs, CO 80920 Telephone: 719-533-1112 FAX: 719-533-1113

Elevator

Lerch Bates 7899 South Lincoln Court, Suite 204 Littleton, CO 80122 Telephone: 720-283-8182 FAX: 720-283-8184

Date


Project Number:

THIRD LEVEL FLOOR PLAN

101 FIRE TREATED PLYWOOD102 FIRE ALARM CONTROL PANEL

GENERAL NOTES

1. GENERAL NOTE

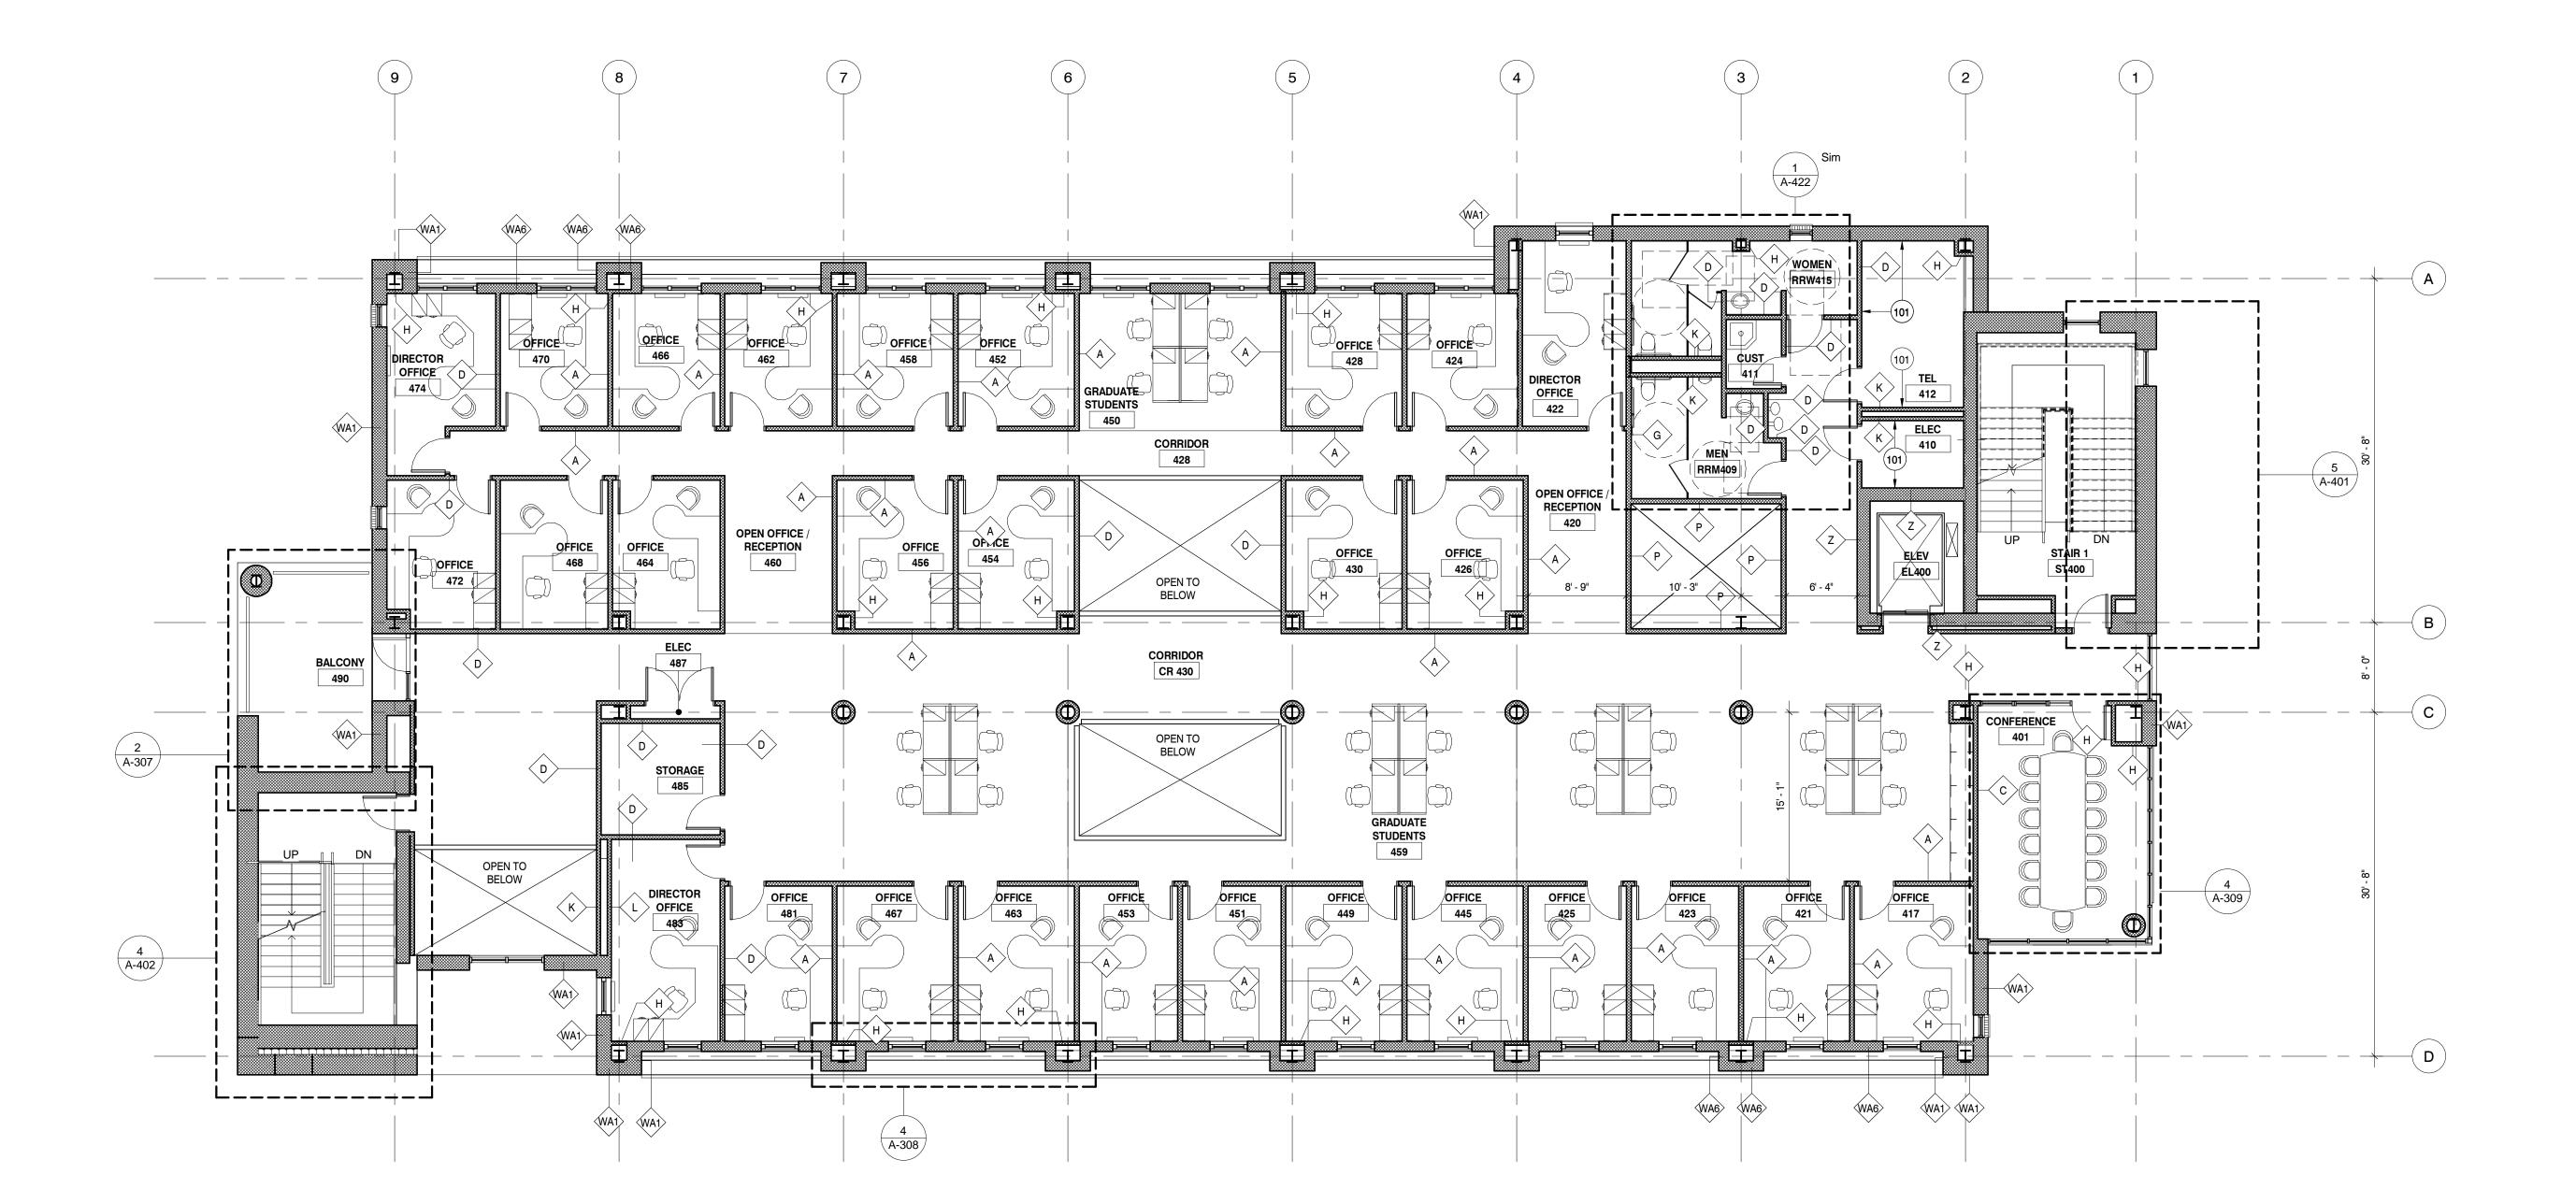

AndersonMasonDale Architects

Institute of Behavioral Science 264

Grandview Avenue and 15th Street 2007025

Owner

Department of Facilities Management Planning, Design and Construction Research Laboratory 2 1540 30th Street, 3rd Floor 453 UCB Boulder, CO 80309

Architect

AndersonMasonDale Architects, P.C. 3198 Speer Boulevard Denver, CO, 80211 Telephone: 303-294-9448 FAX: 303-294-0762

FAX. 303-294-

Civil
SEH, Inc.
Colorado Center Tower One, Suite 6000
2000 South Colorado Boulevard
Denver, CO 80222
Telephone: 720-540-6885

Landscape

Lime Green Design 900 East Louisiana Avenue, Suite 209 Denver, CO 80210 Telephone: 303-733-7558 FAX: 303-733-0959

12499 West Colfax Avenue Lakewood, CO 80215 Telephone: 303-431-6100 FAX: 303-431-6866

Structural

Martin Martin

Mechanical / Plumbing

Shaffer Baucom 7333 West Jefferson Avenue, Suite 230 Lakewood, CO 80235 Telephone: 303-986-8200 FAX: 303-986-8222

Electrical

BCER Engineering 5420 Ward Road, Suite 200 Arvada, CO 80002 Telephone: 303-422-7400 FAX: 303-422-7900

Rimrock Group 2060 Briargate Parkway, Suite 220 Colorado Springs, CO 80920 Telephone: 719-533-1112 FAX: 719-533-1113

Littleton, CO 80122 Telephone: 720-283-8182 FAX: 720-283-8184

IT / Telecom / AV

FAX: 719-533-1113

Elevator

Lerch Bates

7899 South Lincoln Court, Suite 204

ue Da

Project Number:

Drawn By:


Reviewed By:

FOURTH LEVEL FLOOR PLAN



GENERAL NOTES

FOOT.

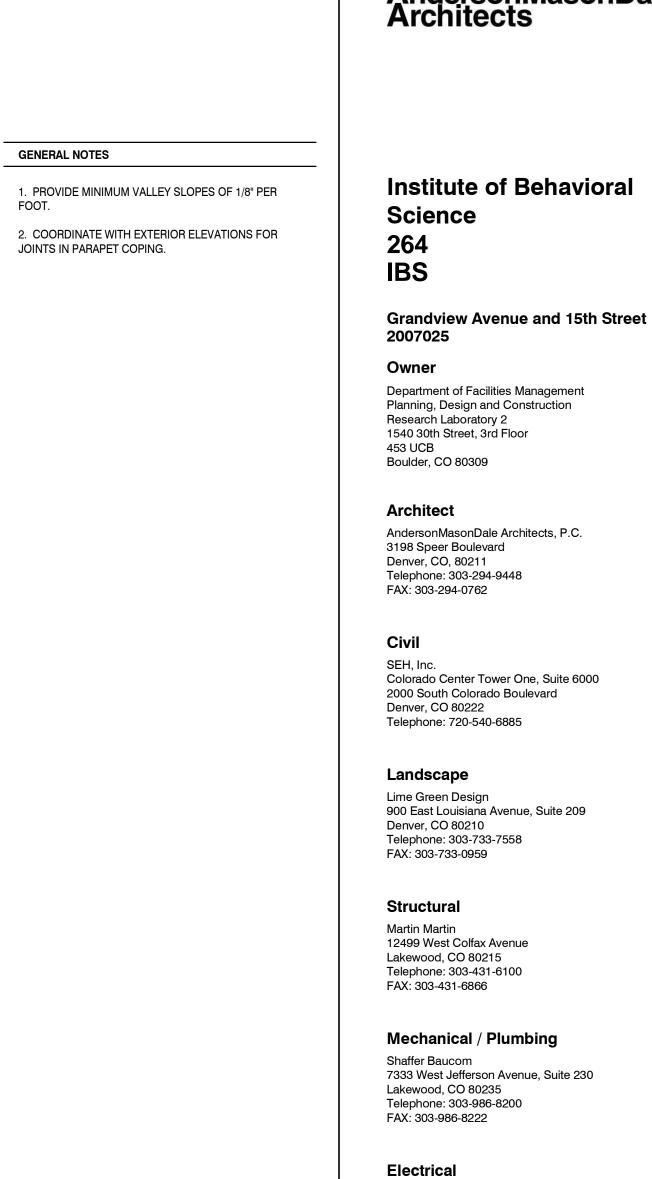

Elevator Lerch Bates 7899 South Lincoln Court, Suite 204 Littleton, CO 80122 Telephone: 720-283-8182

FAX: 720-283-8184

BCER Engineering 5420 Ward Road, Suite 200

Arvada, CO 80002 Telephone: 303-422-7400 FAX: 303-422-7900


IT / Telecom / AV

Rimrock Group 2060 Briargate Parkway, Suite 220 Colorado Springs, CO 80920 Telephone: 719-533-1112 FAX: 719-533-1113

Project Number:

ROOF LEVEL PLAN

A-105

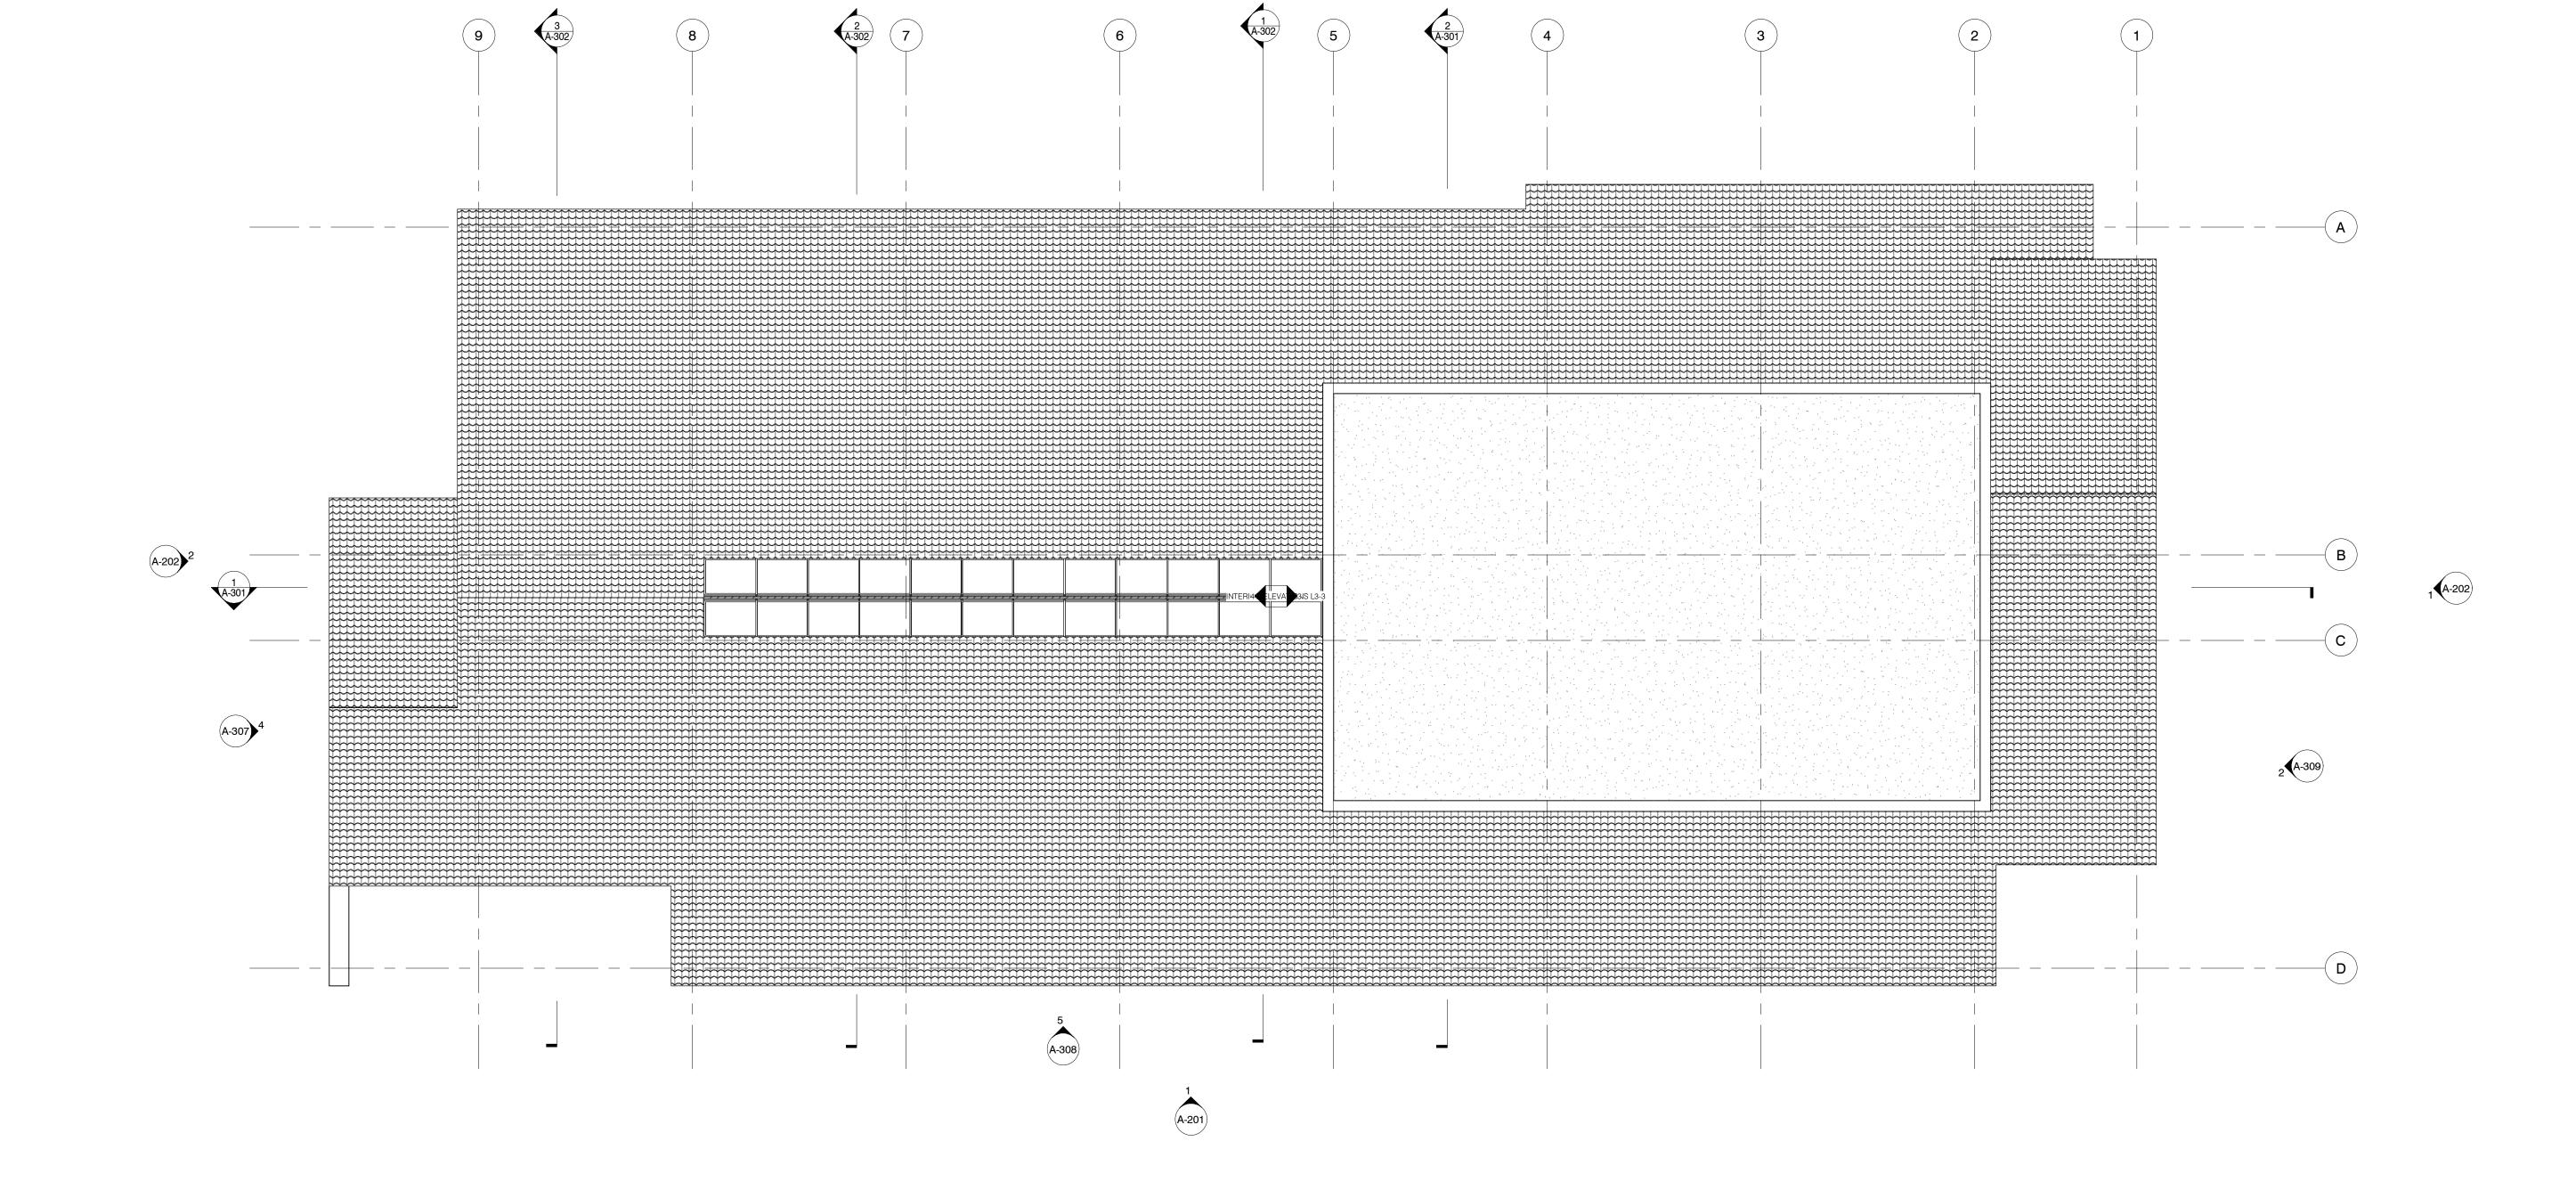



INSTITUTE OF BEHAVIORAL SCIENCE

AndersonMasonDale Architects

WEST ELEVATION







INSTITUTE OF BEHAVIORAL SCIENCE

0' 8' 24' 48' 80'

PRESENTATION TO THE DRB AUGUST 15, 2008 SOUTH ELEVATION





INSTITUTE OF BEHAVIORAL SCIENCE

NORTH ELEVATION



PRESENTATION TO THE DRB AUGUST 15, 2008





INSTITUTE O F BEHAVIORAL SCIENCE PRESENTATION TO THE DRB JULY 11, 2008 ENLARGED ELEVATION

